



VILT Minium Manager

User Guide

Version 2.5



Contents

1. Introduction	1
2. Projects	2
2.1. Monitoring	2
2.1.1. Check if the website is ok	3
2.1.2. Do a search on the website with refresh and check how long it took to load.	4
2.1.3. Click on a link and get the performance of the page	4
2.2. Cookie	4
2.3. Setup a project	5
2.4. Project permissions	13
2.5. Organise projects by Labels or Groups	15
2.5.1. Manage Labels	15
2.5.2. Assign labels to the projects	16
2.5.3. Manage groups	17
Manage groups using LDAP authentication	18
Manage groups without LDAP authentication	18
2.5.4. Organise Projects	20
Clean project filters	21
Auto Refresh	22
2.6. Configuration profiles	22
2.7. Secret configuration properties	23
2.8. Delete a project	24
3. Check the available browsers	26
4. Project Statistics	27
5. Test executions	29
5.1. Launch test executions	29
5.1.1. Launch a test execution manually	29
Multiple Providers	31
5.1.2. Schedule test executions	32
Multiple Providers	34
5.1.3. REST API	34
5.2. Follow the progress of a test execution	37
6. Monitor test results	38
6.1. Feature overview	47
6.2. Reports	48
6.3. Daily Reports	49
6.4. Data Extraction Reports	50
7. Roles	52
7.1. Assign roles	52
7.2. License information	53
Minium Recorder User Guide	54
8. Configure Minium Developer	55
9. Launch Minium Recorder	56

10. Start recording	58
11. Record interactions	59
12. Stop recording	61
13. Import the recorded script in Minium Developer	62

1. Introduction

This document describes the user interface of the VILT - Minium Manager, version 2.5.

Minium Manager is a platform to manage, run and analyze end-to-end tests, designed to run tests across all possible combination of browsers and OS's on a continuous integration fashion. It allows managers to control the quality of a project, providing detailed reports with useful information for failures with errors messages and screenshots.

2. Projects

Configure projects in Minium Manager, in order to run and analyze end-to-end tests. All projects need to have a repository (`Git` or `SVN`) associated, where the code is stored, except the Cookie Crawler.

There are three type of projects: Web application testing, Monitoring and Cookie.

The Web application testing project is a Minium project that test a website in the same way a human would.

The Monitoring project is a Minium project that are executed with high frequency (every 5, 10, 20 minutes), and can give us a report about the availability of a certain page and performance metrics, with the objective to check that the page are working as expected.

The development workflow for a Monitoring project in Minium Developer will be similar to the web application testing project, providing an easy and quick way to write test. The configuration in Minium Manager is similar to other projects. The monitoring project does not have the browser configuration.

The Cookie project generates a report of cookies found during the navigation or crawl of a website. The Cookie is divided in two projects: Cookie Report project and Cookie Crawler project. The Cookie Report project is a Minium project (based on the monitoring project) that extracts the all browser cookies at the end of a scenario. The Cookie Crawler project is a crawler that given one or more URLs, it crawls the websites and, for each URL, extracts the all browser cookies.

2.1. Monitoring

To start the development of a monitoring project, you need to check the checkbox `Is a Monitoring Project?` to generate the monitoring project:

New project **cucumber**

Project type

Cucumber Project

Automator Project

Parent Directory

Parent Directory

Project Name

Project Name

☐ **Is a Monitoring Project?** This configuration will generate a different Cucumber Project, focused to retrieve information about the availability of a certain page and performance metrics.

Advanced

Create

Cancel

Here are some examples of the development workflow in Minium Developer of the monitoring project:

2.1.1. Check if the website is ok

Use case: You want to test if the URL is ok and get the performance in the reports

Scenario:

```
Scenario: Check Blog La caixa
  When Check if website responds: "https://blog.caixabank.es/"
```

Step:

```
When(/^Check if website responds: "([^\"]*)"$/, function(url) {
  browser.get(url);
});
```

For a monitoring project, the expression `browser.get(url);` retrieves the data related to page load performance, the URL status, the number of requests, the page size and javascript errors. This information will be presented at the Minium Manager report.

2.1.2. Do a search on the website with refresh and check how long it took to load.

Use case: You want to perform a search on the website (where's there's a refresh after the search) and check if the results appear and get the performance of the page.

Scenario:

```
Scenario: Search
  Given I'm at
    "https://www.caixabank.es/particular/home/particulares_es.html"
  When Search for "CaixaBank" and check the results
```

Steps:

```
When(/^I'm at "([^"]*)"$/, function(url) {
  browser.get(url);
});

When(/^Search for "([^"]*)" and check the results$/, function(search) {
  $("#cookies-accept-full a").click();
  $("#search-field").fill(search);
  $("#prebuscadorCabecera input[type='submit']").click();
  expect($(".search-result-block")).to.exist();
  scenario.write(browser.getPerformance());
});
```

The expression `scenario.write(browser.getPerformance());` retrieves and store the data related to the last page load performance, the URL status, the number of requests, the page size and javascript errors. This information will be presented at the Minium Manager report.

2.1.3. Click on a link and get the performance of the page

```
When(/^I click on link with text "([^"]*)"$/, function(text) {
  $("a").withText(text).click();
  expect($(".page-title")).to.exist();
  scenario.write(browser.getPerformance());
});
```


2.2. Cookie

Since the Cookie Report project is a Minium project (based on the monitoring project), to create a Cookie Report project, simply generate a Monitoring project in Minium Developer. It is not necessary to add extra instructions to the minium code, since all browser cookies will be automatically extracted at the end of each scenario.

For the Cookie Crawler project, development is not necessary, you only need to provide one or more URLs to crawl.

2.3. Setup a project

To set up a project, click on the button `New Project`:

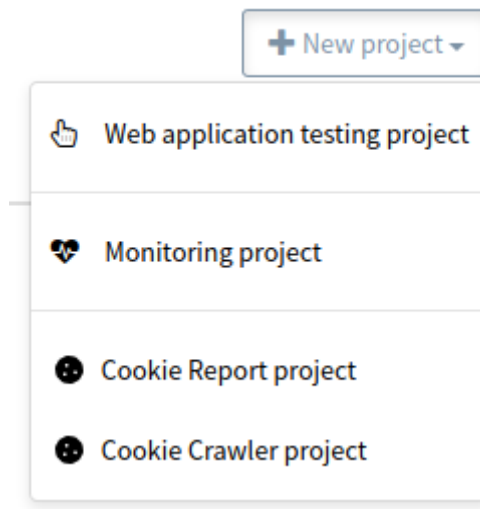

Then, fill the form:

Create or edit a Project

General

Browsers

Reports and Scheduling

Advanced

Runtime

API

Name*

project-e2e-tests

Description

Small project description

Labels

Associate labels to a project to organize projects.

+ Add

Repository

Type*

git Git

Subversion

URL *

https://github.com/viltgroup/minium-mail-e2e-tests.git

Username

bob

Password

.....

Branch

master

Save

Cancel

On the `General` tab, fill the following fields:

Name	Display name of the project (e.g gmail-e2e-tests)
Description	Optionally provide a project description
Labels	Associated labels to a project in order to organize and filter projects.
Type	Type of SCM repository
Url	URL of the repository where the project with the features is stored. The following are examples of valid git URL's (or a local file path): https://github.com/github/git.git //dolos/repos/gmail-e2e-tests
Username/Password	Credentials for authentication on the repository.
Branch	The name of the branch you want to execute (GIT only). The default value is <code>master</code>

Cookie

For the Cookie Crawler project the General tab is different:

Create or edit a Project

General

Reports and Scheduling

Advanced

Runtime

API

Name*

Name of the project

Description

Small project description

Labels

Associate labels to a project to organize projects.

+ Add

Cookie Crawler Settings

Urls crawler*

Set the URLs you want to crawl

Domains to Filter*

Set the domains you want to filter at the Cookie Crawler

Max Depth*

4

Accept Cookies

Active

Cookies Validations

Configurations

Set the cookie name and/or value and/or URL of the cookies you want to validate.

Cookie Name

Cookie Value


Url

+

Save

Cancel

Urls crawler	The URLs you want to crawl (e.g. https://www.caixabank.es/index_es.html)
Domains to Filter	The domains you want to filter at the crawl (e.g. www.caixabank.es)
Max Depth	Maximum depth for the crawler to follow links automatically
Accept Cookies	Accept the cookie warning during the crawl (is related to the field <code>Script to accept cookies</code> at the Runtime tab of the Cookie Crawler project).
Cookies Validations	the cookie name and/or value and/or URL of the cookies you want to validate. After you configure one validation, click at the button + to add the validation.

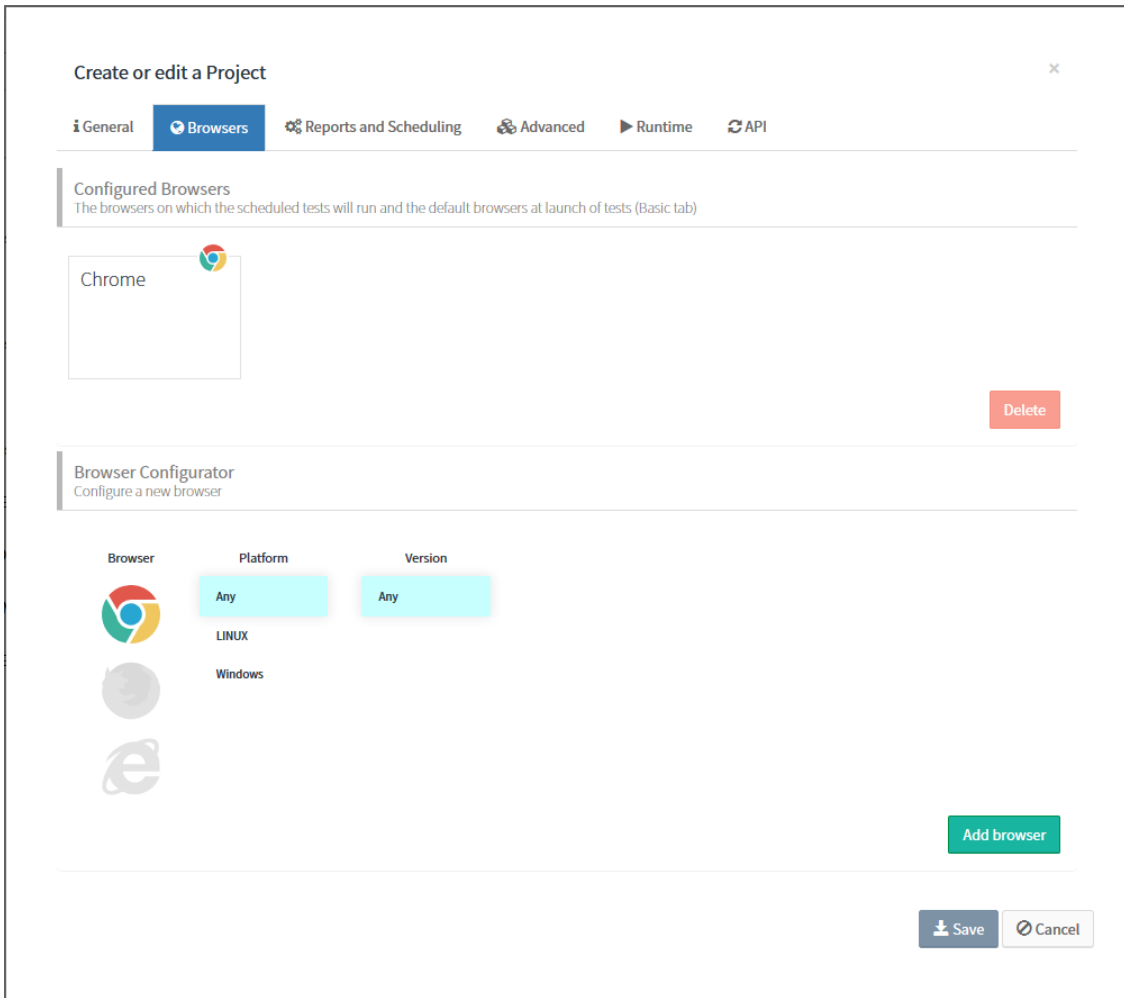

Create or edit a Project

General Browsers Reports and Scheduling Advanced Runtime API

Configured Browsers
The browsers on which the scheduled tests will run and the default browsers at launch of tests (Basic tab)

Chrome

Delete

Browser Configurator
Configure a new browser

Browser	Platform	Version
	Any	Any
	LINUX	
	Windows	

Add browser

Save Cancel

On the `Browsers` tab, choose the browsers on which the scheduled tests will run, and the default browsers at launch of tests (Basic tab)

To configure the browsers, click `Browser Configurator` to expand the available browsers and select a browser (and the properties). After, click `Add browser`.

If you want to remove a configured browser, select the browser configuration (below the configured browsers) and click "Delete".



Note:

The `Browsers` tab is not available for the monitoring and cookie projects.

Project Configurations

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

General

Browsers

Reports and Scheduling

Advanced

Runtime

API

Emails

Recipients

Email addresses to receive reports of the executions

☐ Send only when there are test failures

Report formats

PDF

XLSX

☐ PDF with screenshots

Scheduling

Scheduler

Never run

Every Day

Every Week

Every Month

Every Day at midnight

Custom

Scheduler Custom Configurations

At 00:00

Every: Day

at 0

:

0

Delete Project

Update

Cancel

On the **Reports and Scheduling** tab, fill the following fields:

Recipients	Set email addresses to receive a report of execution for the project. If you only want to receive the report of the executions that contains failed tests, check the option "Send only when there are test failures".
Report formats	Set the format(s) that the report of execution will be sent to the email. If you want to receive the pdf report with screenshots, check the option "PDF with screenshots".
Scheduler	Set the schedule you want to execute the project and send the report of the execution. If you choose the option <i>Custom</i> you can set a custom schedule.
Scheduler Custom Configurations	Set the schedule you want to execute the project and send the report of the execution with different levels of granularity.

Project Configurations

×

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

General

Browsers

Reports and Scheduling

Advanced

Runtime

API

Permissions

Name	Read	Write	Launch tests
Minium Team	☒	☒	☒

+ Append

Store execution videos

☒ Inactive

Max number of test executions passed stored

Max number of test executions failed stored

Module

Delete Project

Update

Cancel

On the **Advanced** tab, fill the following fields:

Permissions	Add and personalize the level of access that assigns to each user or group.
Store executions videos	Configuration to allow the storage of videos of the executions.
Max number of test executions passed stored	Set the max number of executions passed to be stored at Minium Manager.
Max number of test executions failed stored	Set the max number of executions failed to be stored at Minium Manager.
URL Loading time threshold	Maximum time to load a page (in seconds) to warning the user at the executions page. Available only to Monitoring projects
Module	The path to the folder where the features are in the repository (e.g minium-developer-e2e-tests).

Project Configurations

×

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

General

Browsers

Reports and Scheduling

Advanced

Runtime

API

Cucumber tags

Run only features or scenarios that have certain tags.

Additional profiles

Enable any of the profiles that you have configured in the project.

Configuration properties

Configuration properties can be used directly in your code and managed here on Minium Manager. The values won't be visible to anyone once saved and will be stored encrypted.

Property

Value

👁

+

Minium version

☒ Update to the latest version

Updates the version of minium-cucumber-parent on the project's POM.

Delete Project

Update

Cancel

At the `Runtime` tab, fill the following fields:

Cucumber tags	Use this option to tell Minium Manager that only run features or scenarios that have certain tags.
Additional Profiles	Enable any of the profiles that are configured in the <code>./config/application.yml</code> project file. See Configuration profiles for more details.
Configuration properties	This configuration properties can be used directly in your code and managed here on Minium Manager. The values won't be visible to anyone once saved and will be stored encrypted.

Cookie

For the Cookie Crawler project the Runtime tab is different:



Create or edit a Project

General

Reports and Scheduling

Advanced

Runtime

API

Inject Cookie

Set the cookies you want to inject at the cookie crawler.

Cookie Name

Cookie Domain

Cookie Value

+

Script to accept cookies

Add your script to accept the cookies.

await page.waitForSelector("#cookies-accept-full > a", { visible: true, timeout: 10000 });
await page.click("#cookies-accept-full > a");
await page.waitFor(3000);

Save

Cancel

Inject Cookie	The the cookies you want to inject at the crawl (e.g. cookie to accept the cookie warning)
Script to accept cookies	The script to accept the cookie warning (in puppeteer). This field is related to the field Accept Cookies at the General tab of the Cookie Crawler project. The default script accepts the cookie warning for https://www.caixabank.es .

Create or edit a Project

General

Browsers

Reports and Scheduling

Advanced

Runtime

API

Project key

c8772ee6168adb42

Renew

Delete

A project key is required to launch test executions and get test results through the REST API.

Example scripts

Python

Shell

```

import json, requests, sys, time

url = "https://bolina.vilt-group.com/api/projects/<PROJECT-ID>/test-executions"

headers = {
    'PROJECT-KEY': "c8772ee6168adb42",
    'content-type': "application/json"
}

execution_params = {
    'browsers': [
        {"browserName": "chrome"}
    ],
    # 'gitRepositoryBranch': 'new-feature',
    # 'commit': 'Commit title',
    # 'commitLink': 'https://repository/commits/121ac1b',
    'additionalConfig': {

```

Save

Cancel

On the `API` tab, fill the following fields:

Project key	Generate a project key (required to launch test executions and get test results through the REST API).
Example scripts	Once the project has an API key, the scripts will be fulfilled with the project-specific data and ready to use. The first part of the script shows how to launch a test execution.

2.4. Project permissions

Manage the access levels of the users/groups in the projects. It is also possible to add and personalize the level of access that assigns to each user or group, per-project.



Note:

Write permissions is required to update the permissions of a project.

In order to change the project permission the first step is go to the project configuration and click on tab `Permissions`.

Project Configurations

General

Browsers

Reports and Scheduling

Executors

Advanced

Runtime

API

Permissions

Name	Read	Write	Launch tests	
admin	☒	☒	☒	
minium.team	☒	☒	☒	
qa.team	☐	☐	☒	
eng.team	☒	☐	☐	

Type the name of a user or group

+ Append

Max number of test executions stored

10

Module

Insert the path of the subproject that you want to test

Delete Project

Update

Cancel

Add user or groups to the permission table. Below the permission table, start typing the name of the user or group desired. Then click on the button `Append`.



Note:

It is possible to select more than one user or group.

bob

alice

+ Append

After the users or groups was appended to the permissions table, define the permission for each entry appended and click `Update` to save the project configurations.

Project Configurations

General
Browsers
Reports and Scheduling
Executors
Advanced
Runtime
API

Permissions

Name	Read	Write	Launch tests	
admin	☒	☒	☒	
minium.team	☒	☒	☒	
qa.team	☐	☐	☒	
eng.team	☒	☐	☐	
bob	☒	☐	☒	
alice	☒	☐	☐	

Type the name of a user or group
Append

Max number of test executions stored
10

Module
Insert the path of the subproject that you want to test

Delete Project
Update
Cancel

2.5. Organise projects by Labels or Groups

Labels were meant to be used only to filter projects in the Projects page providing a useful way to organize the projects.

minium Manager
Browsers
Account
Management
System
Language

Projects
0 of 20000 scenarios executed

Groups

eng.team
minium.team
qa.team

Labels

dev
prod
staging
View all

Search project

Service name

Last Execution

Results Statistics

Schedule

Launch test execution

test-jvm-project

No executions

No execution yet

No scheduled executions

Launch test

test

No executions

No execution yet

No scheduled executions

Launch test

unauthenticated_project

No executions

No execution yet

No scheduled executions

Launch test

authenticated_project

No executions

No execution yet

No scheduled executions

Launch test

google-test-svn

2 years ago

100%

No scheduled executions

Launch test

minium-mail-e2e-tests

a year ago

50% 50%

No scheduled executions

Launch test

google-test-git

2 years ago

78% 22%

No scheduled executions


Launch test

Show 15 projects


Previous 1 Next

2.5.1. Manage Labels

To manage the labels, open the **Management** menu and click on **Labels**:

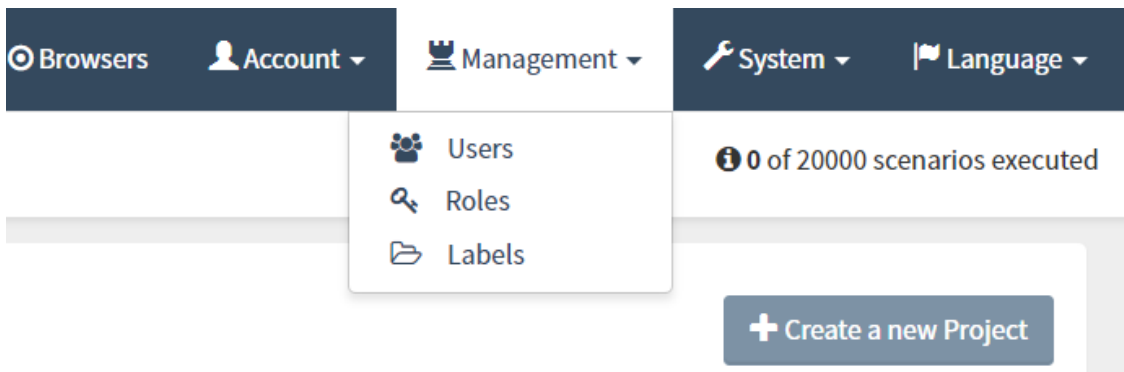

The Labels page is shown with all current labels. Edit, delete and create new ones if desired.

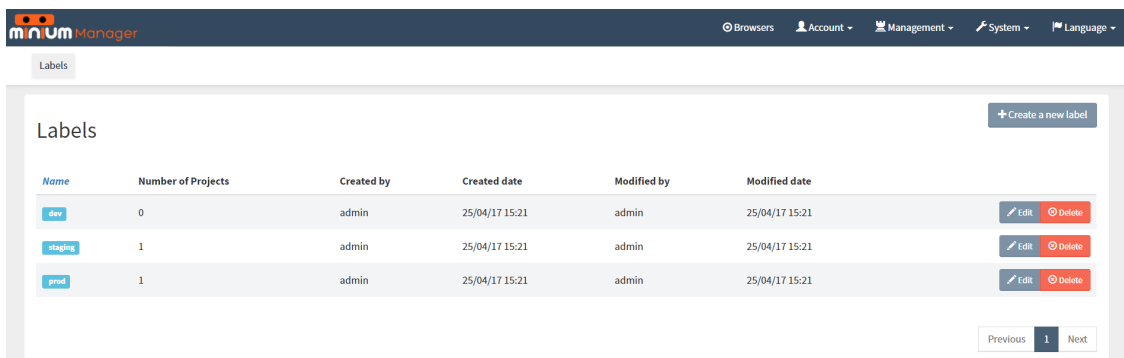

To create a new label, click on `Create a new label`. To delete or edit an existing label, click on `Edit` or `Delete` respectively.




Create or edit a label

Name

2.5.2. Assign labels to the projects

To assign some labels to a project, go to the project configurations:

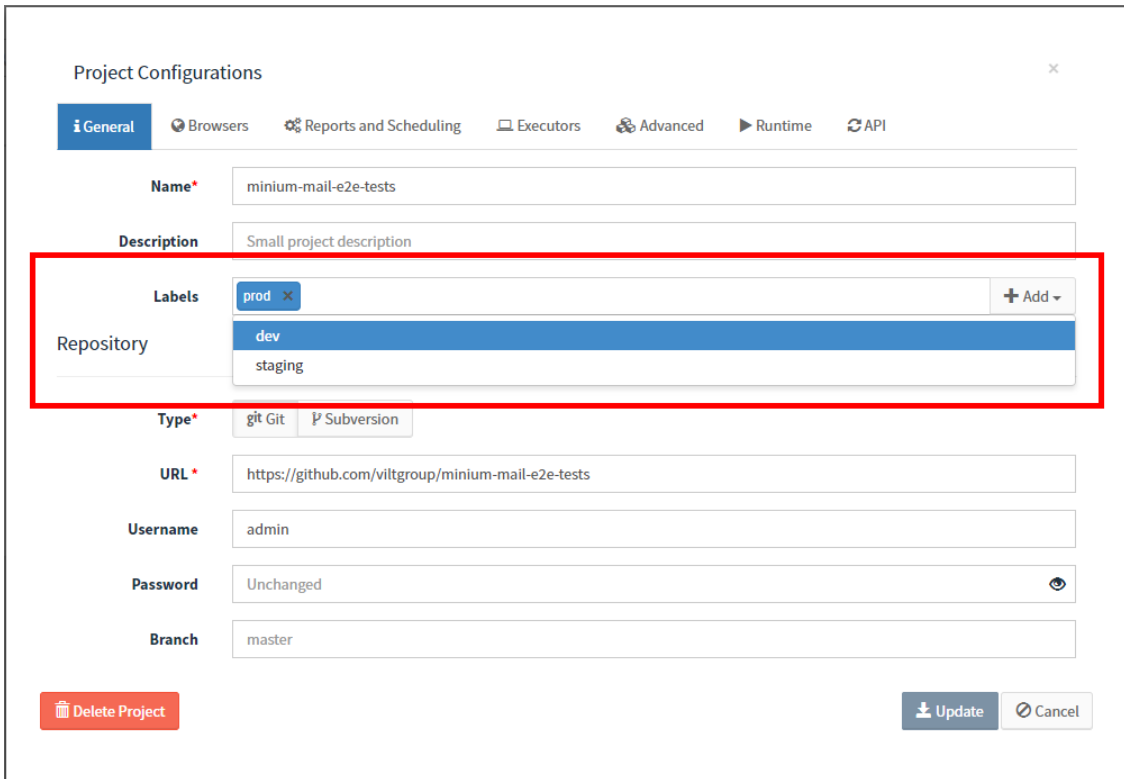

Project Configurations

General Browsers Reports and Scheduling Executors Advanced Runtime API

Name* minium-mail-e2e-tests

Description Small project description

Labels prod x + Add

Repository dev staging

Type* git Git P Subversion

URL* https://github.com/viltgroup/minium-mail-e2e-tests


Username admin

Password Unchanged

Branch master

Delete Project Update Cancel

The Add button can be used to create new labels if needed.

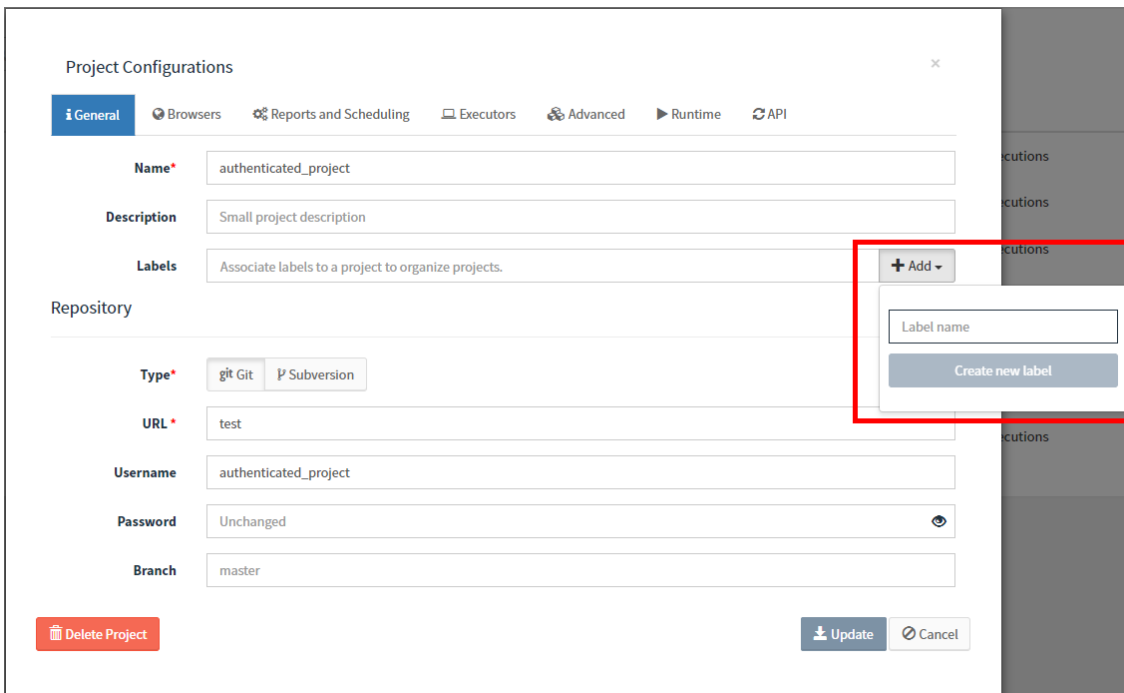

Project Configurations

General Browsers Reports and Scheduling Executors Advanced Runtime API

Name* authenticated_project

Description Small project description

Labels Associate labels to a project to organize projects.

Repository

Type* git Git P Subversion

URL* test

Username authenticated_project

Password Unchanged

Branch master

Delete Project Update Cancel

+ Add

Label name

Create new label


2.5.3. Manage groups

Groups are intended to organize projects at a higher level and to perform changes in several projects at a time.

Manage groups using LDAP authentication

If Minium Manager is using LDAP to manage the users, the groups are configured through the LDAP.

In the project configuration, search for groups. Below the permission table, start typing the name of the user or group. This will perform a search into the LDAP directory.

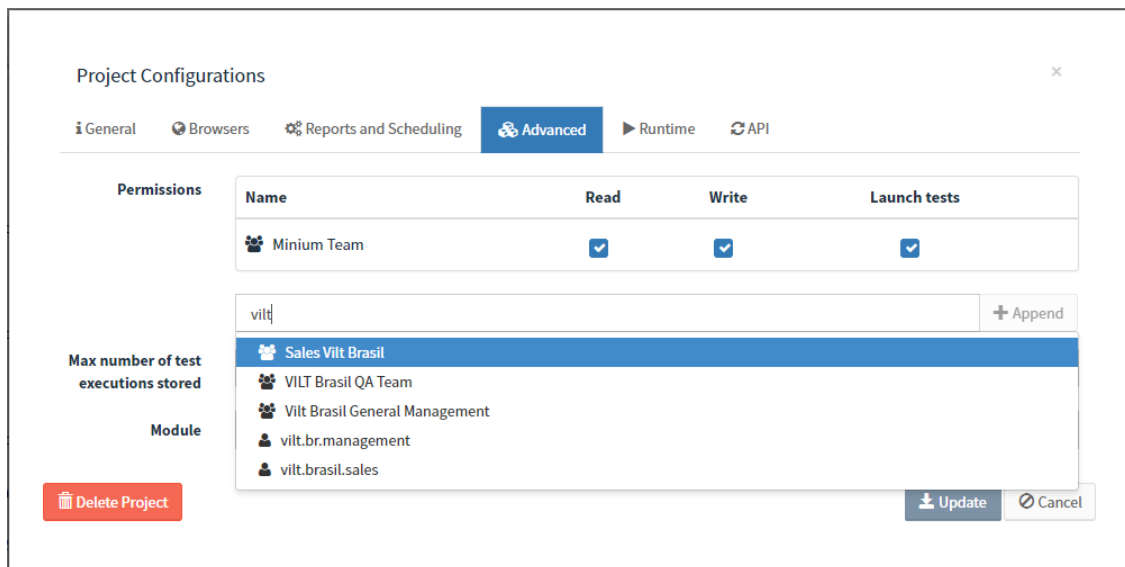

Project Configurations

General Browsers Reports and Scheduling **Advanced** Runtime API

Permissions

Name	Read	Write	Launch tests
Minium Team	☒	☒	☒

vilt + Append

- Sales Vilt Brasil
- VILT Brasil QA Team
- Vilt Brasil General Management
- vilt.br.management
- vilt.brasil.sales

Max number of test executions stored

Module

Delete Project Update Cancel


Manage groups without LDAP authentication

If Minium Manager is **not** using LDAP authentication, create new groups through the user management UI.



Note:

Only the users with `Admin` privileges are allowed to create groups.

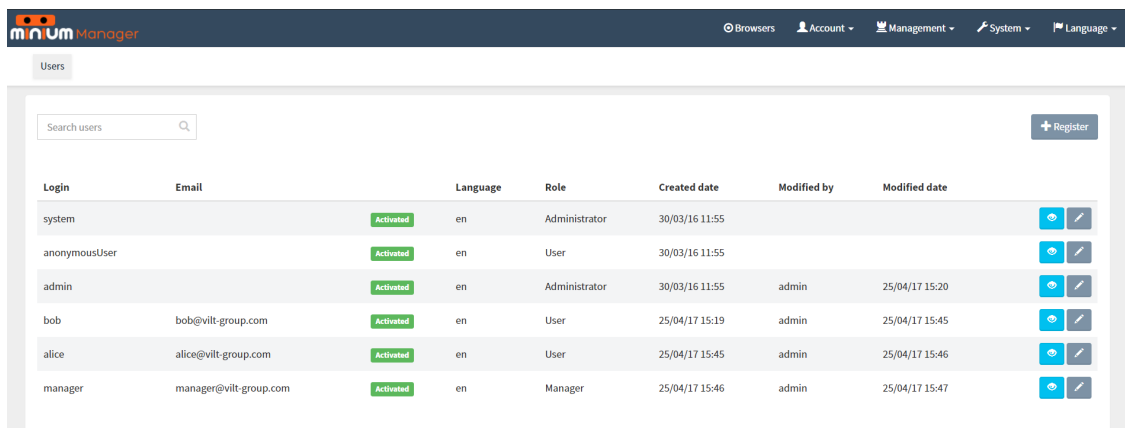

minium Manager

Browsers Account Management System Language

Users

Search users + Register

Login	Email	Language	Role	Created date	Modified by	Modified date
system		Activated	en	Administrator	30/03/16 11:55	
anonymousUser		Activated	en	User	30/03/16 11:55	
admin		Activated	en	Administrator	30/03/16 11:55	admin 25/04/17 15:20
bob	bob@vilt-group.com	Activated	en	User	25/04/17 15:19	admin 25/04/17 15:45
alice	alice@vilt-group.com	Activated	en	User	25/04/17 15:45	admin 25/04/17 15:46
manager	manager@vilt-group.com	Activated	en	Manager	25/04/17 15:46	admin 25/04/17 15:47

Create or edit a user

Login

manager

First name

Last name

Email

manager@vilt-group.com

☒ Activated

Language

en

Groups

managers.team

minium.team

eng.team

qa.team

+ Add

Cancel

new.group

Create

Login

bob

E-mail

bob@vilt-group.com

Groups

qa.team

minium.team

eng.team

+ Add

Back

Register

new.group

Create

If desired add permissions to the group recently created in the project configuration. Below the permission table, start typing the name of the group created.

Project Configurations

General

Browsers

Reports and Scheduling

Executors

Advanced

Runtime

API

Permissions

Name	Read	Write	Launch tests
qa.team	☒	☒	☒

new

+ Append

new-group

Max number of test executions stored

Module

Insert the path of the subproject that you want to test


Delete Project

Update

Cancel

2.5.4. Organise Projects

Using **groups** and **labels** to organise the projects selecting a group and labels from the sidebar.

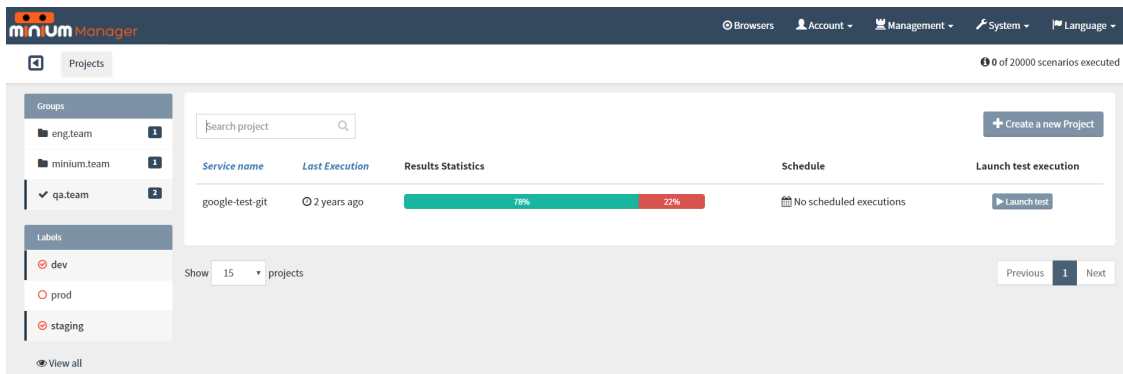

Select one **group** at a time, but select multiple **labels** and combine both.

In the case of the figure above, notice that the **group qa.team** is selected and two **labels** are also selected (**dev** and **staging**). With filters applied, exists one project shown in the project list.

This means that the one project belong to the **group qa.team** (see it in the figure below).

Project Configurations

General

Browsers

Reports and Scheduling

Executors

Advanced

Runtime

API

Permissions

Name	Read	Write	Launch tests
qa.team	☒	☒	☒

Type the name of a user or group

+ Append

Max number of test executions stored

10

Module

Insert the path of the subproject that you want to test

Delete Project

Update

Cancel

The project either has the **label dev** or **staging** associated with it in the project configuration (as shown in the figure below).

Project Configurations

General

Browsers

Reports and Scheduling

Executors

Advanced

Runtime

API

Name*

google-test-git

Description

Small project description

Labels

staging

+ Add

Repository

Select a **group** or **one or more label**, like shown in the figure below. In this specific case, are selected only the **label prod**, without selecting any group. It means that all the projects in the list have the **label prod** associated.

minium Manager

Browsers

Account

Management

System

Language

Projects

0 of 20000 scenarios executed

Groups

eng.team

minium.team

qa.team

Labels

dev

prod

staging

View all

Search project

Service name

Last Execution

Results Statistics

Schedule

Launch test execution

minium-mail-e2e-tests

a year ago

50%

50%

No scheduled executions


Launch test

Show 15 projects

Previous 1 Next

Clean project filters


By clicking on the link **CLEAR ALL**, it will remove all the selected filter.

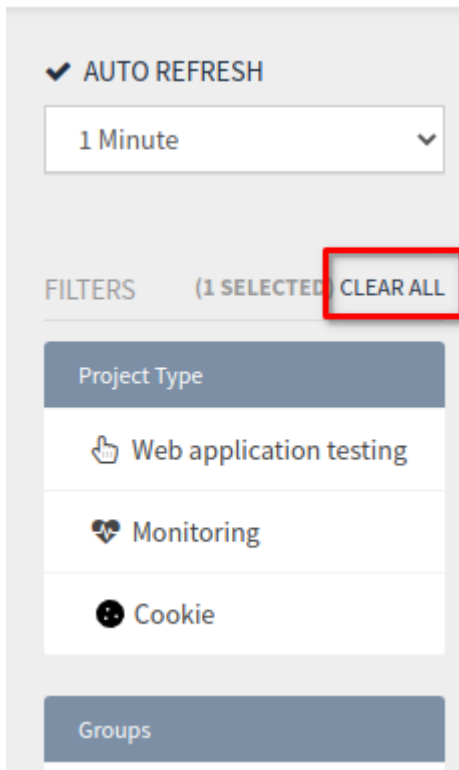

Auto Refresh

By default, the project page will be refreshed every minute. Also, you can configure the project page to refresh every 5 and 10 minutes.

To disable the auto refresh, just click on the link "AUTO REFRESH":

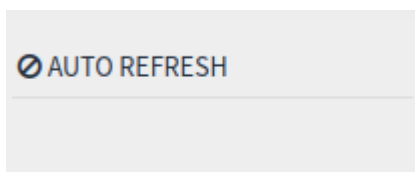

Note:



The link "AUTO REFRESH" with the ban icon, means that is disabled; The link "AUTO REFRESH" with the check icon, means that is enabled.

2.6. Configuration profiles


Configuration profiles can be defined on the `config/application.yml` of a project and used to load configuration properties that vary based on the environment being tested. Such a configuration could be for example the URL of the application or the language:

```
# default values
minium:
  config:
    baseUrl: http://localhost
    language: English
---
spring.profiles: qa
minium:
  config:
    baseUrl: http://staging
---
spring.profiles: es
minium:
  config:
    language: Spanish
```

These configuration properties can then be used on the step definitions like this:

```
When(/^I go to the homepage"$/, function() {
  browser.get(config.baseUrl);
  $(".dropdown").withText("Language").click();
  $(".dropdown a").withText(config.language).click();
});
```

Then to run test executions with the configuration properties of a profile, go to **Project Configurations** and add it to **Additional profiles**:

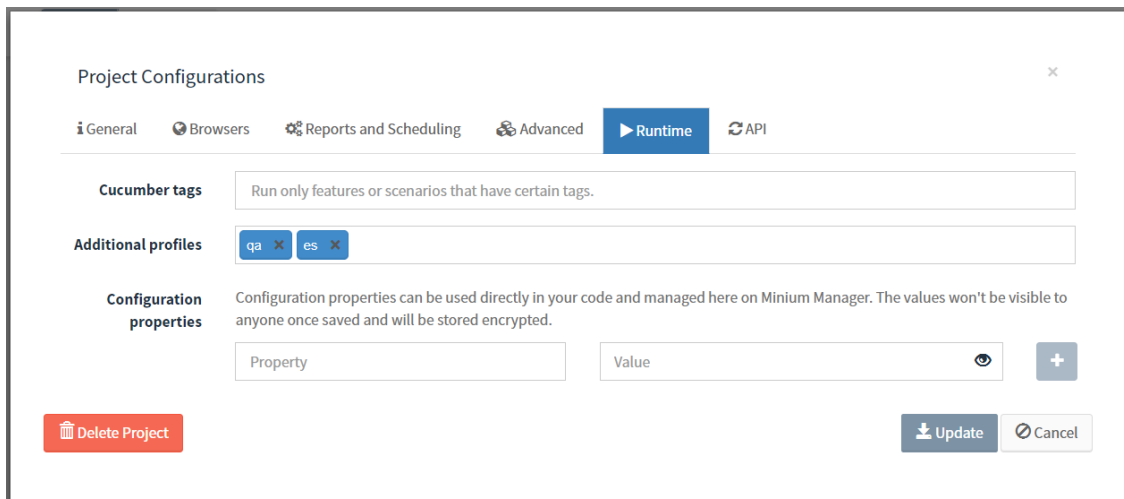

2.7. Secret configuration properties

Sensitive configuration properties that cannot be included on the repository of the tests can be safely stored on Minium Manager. They can be used just like the configuration properties defined on the `config/application.yml` file of the project. As an example, consider that some tests need to be executed against a production environment which requires a password that cannot be exposed on the code. In that case, only the password to be used on the test environment would be defined on the `config/application.yml` file:

```
minium:
  config:
    baseUrl: http://staging
    username: test
    password: minium


---
spring.profiles: prod

minium:
  config:
    baseUrl: https://production
    username: admin
```

Which would be accessible through the `config.password` during the tests:

```
When(/^I login"$/, function() {
  browser.get(config.baseUrl);
  $("text").fill(config.username);
  $("password").fill(config.password);
  $("submit").click();
});
```

The password to be used on the production environment would then be defined on the Project Configurations:

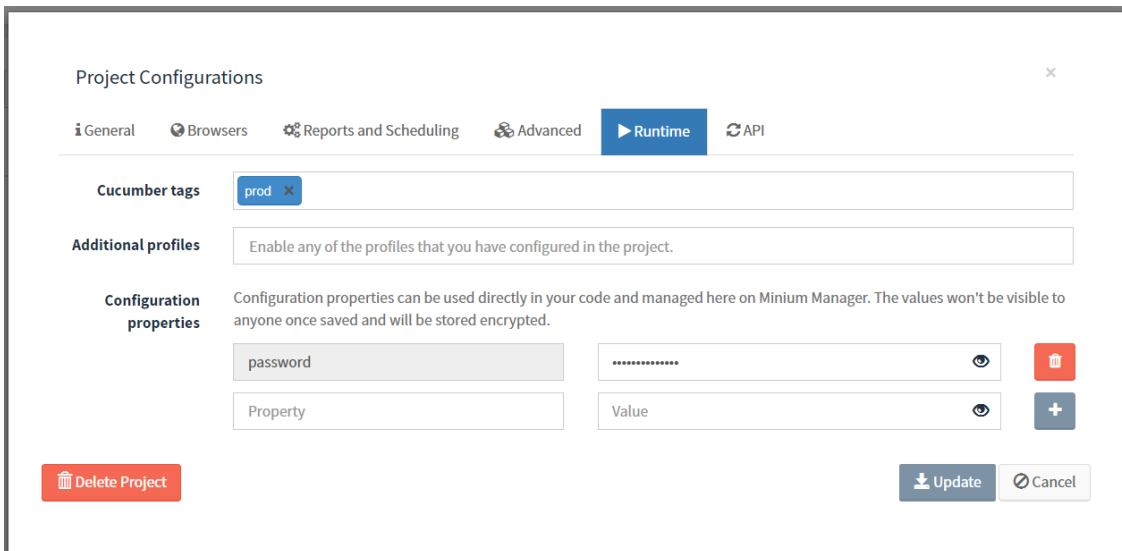

Project Configurations

General Browsers Reports and Scheduling Advanced **Runtime** API

Cucumber tags: prod

Additional profiles: Enable any of the profiles that you have configured in the project.

Configuration properties: Configuration properties can be used directly in your code and managed here on Minium Manager. The values won't be visible to anyone once saved and will be stored encrypted.

Property	Value
password	*****

Buttons: Delete Project, Update, Cancel

2.8. Delete a project

To delete a project, go to the project **configurations** and click on the button `Delete Project`, at the bottom-left corner:


Sh

Username	admin
Password	Unchanged
Branch	master

 **Delete Project**

3. Check the available browsers

To check the available browsers, click on **Browsers**, at the navigation bar.

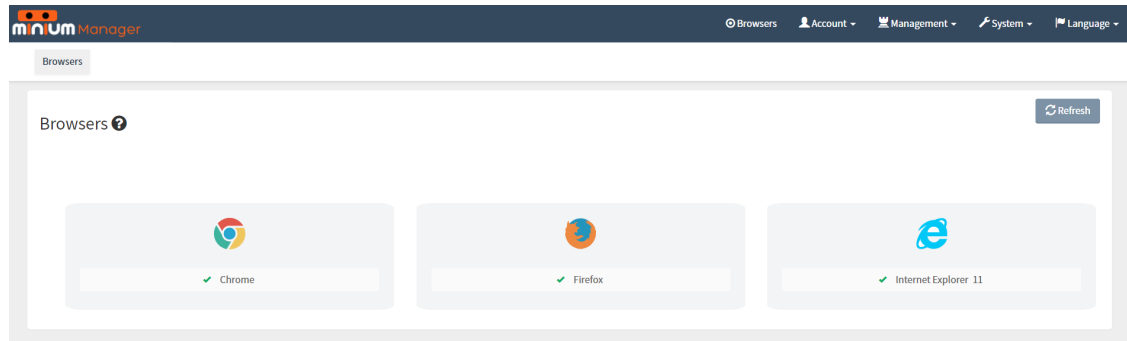


In the figure above, we only have one provider available, but we can have two or more providers configured (e.g. "BrowserStack" and/or "Selenium Grid Extras"). The provider configured has the browsers Chrome, Firefox and Internet Explorer available.


This means that with this environment is able to run the tests in Chrome, Firefox and Internet Explorer at the provider configured.

4. Project Statistics

Evolution chart to the test executions of a project.

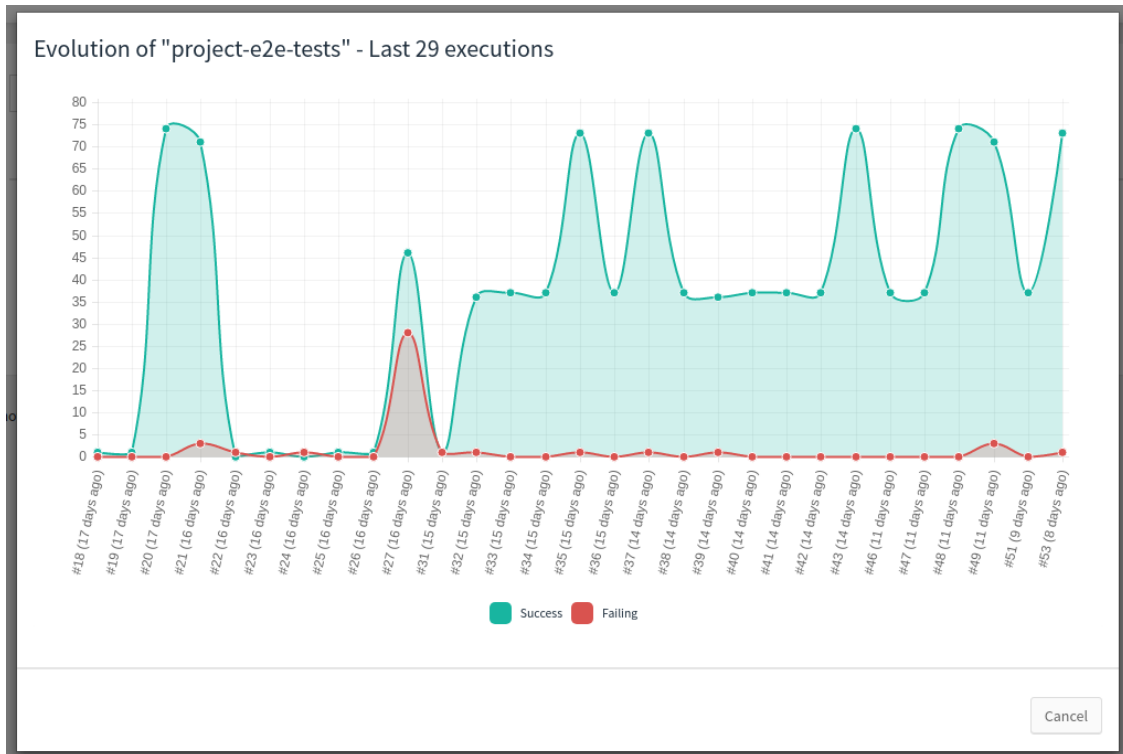

Statistics for a single execution.

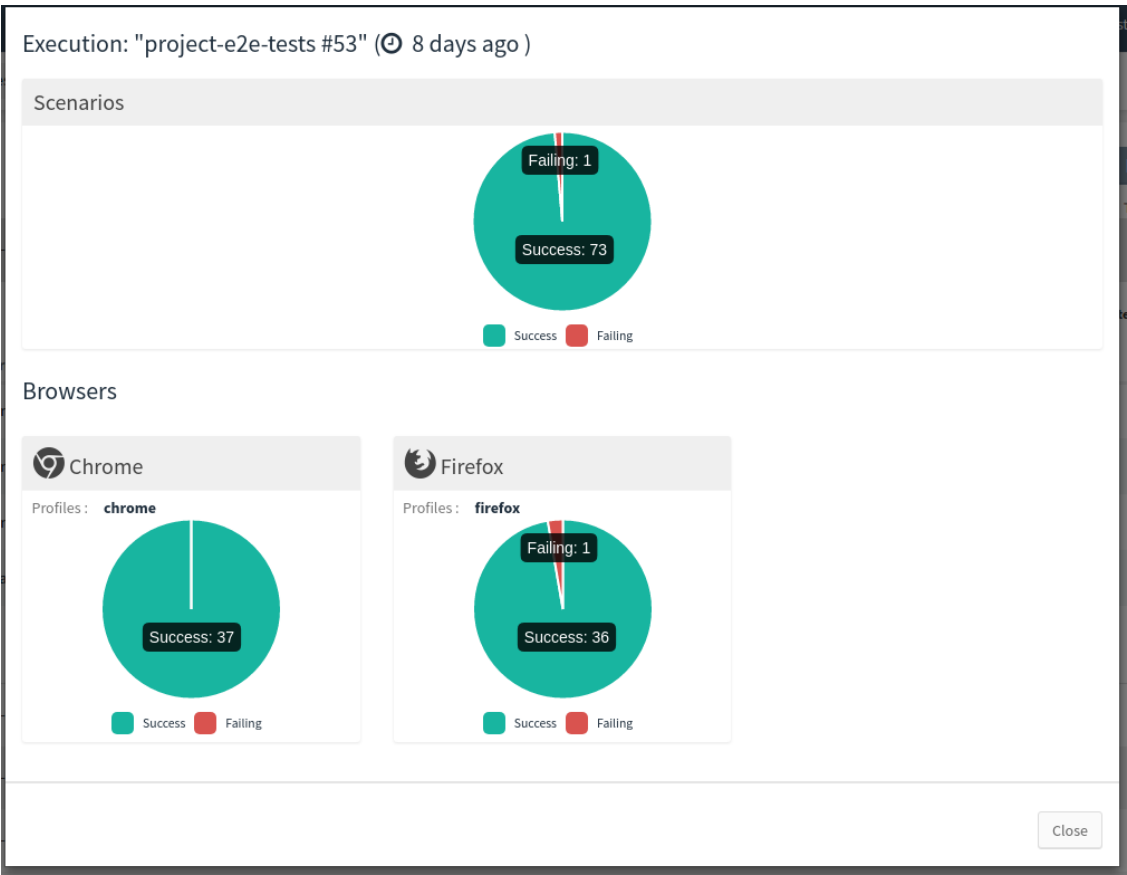


5. Test executions

5.1. Launch test executions


A test execution will execute the tests present in a project on one or more different browsers. There are alternative ways for launching test executions.

5.1.1. Launch a test execution manually


On the homepage or the page of a project, click on button `Launch test`, which opens a modal for selecting the browsers.

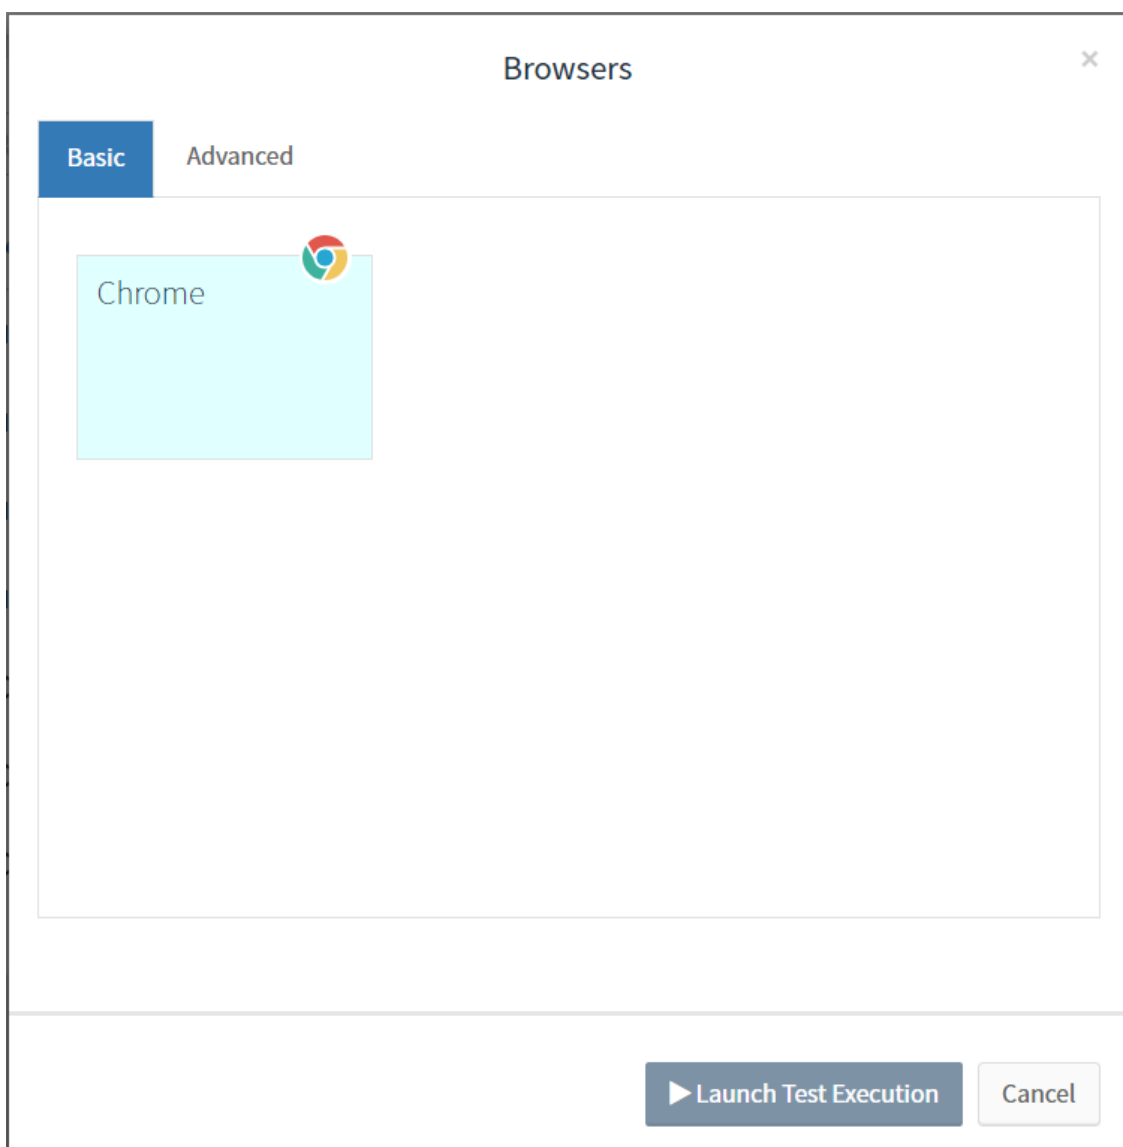

Select the desired browsers by clicking on them. If needed, click on the `Advanced` tab to configure a new one. To configure a browser, click on the corresponding icon and choose its properties. Then, click on `Add browser`.

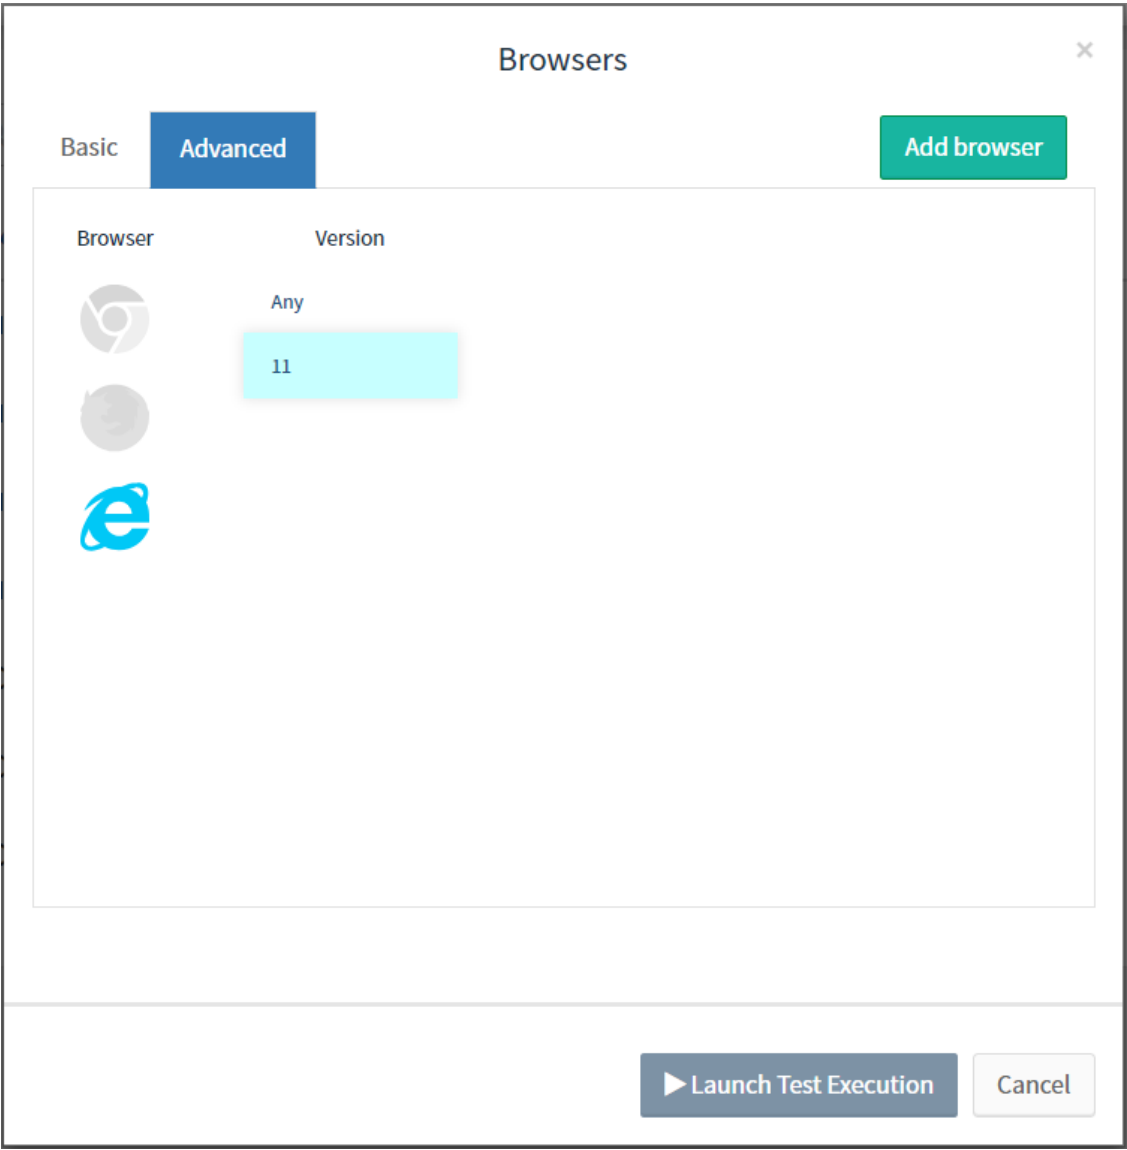

The new browser is now available to be selected on the `Basic` tab.

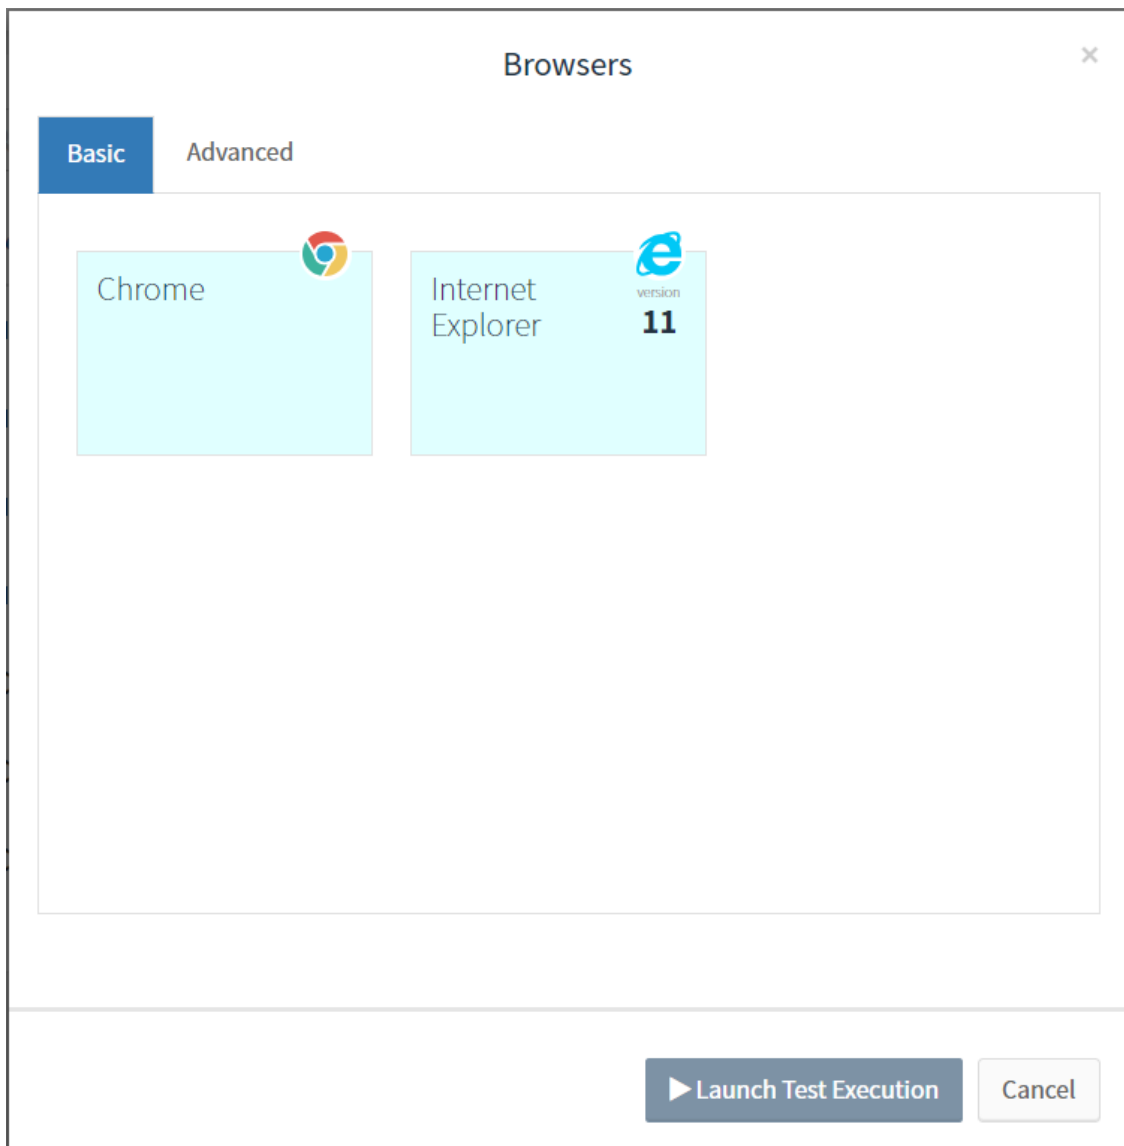

After selecting all the browsers, click on `Launch Test Execution`.


Note:



At the click on button `Launch test`, the Monitoring project don't open a modal for selecting the browsers. It launches a test immediately.


Multiple Providers

With multiple providers, the Launch modal presents the provider configured for the project.

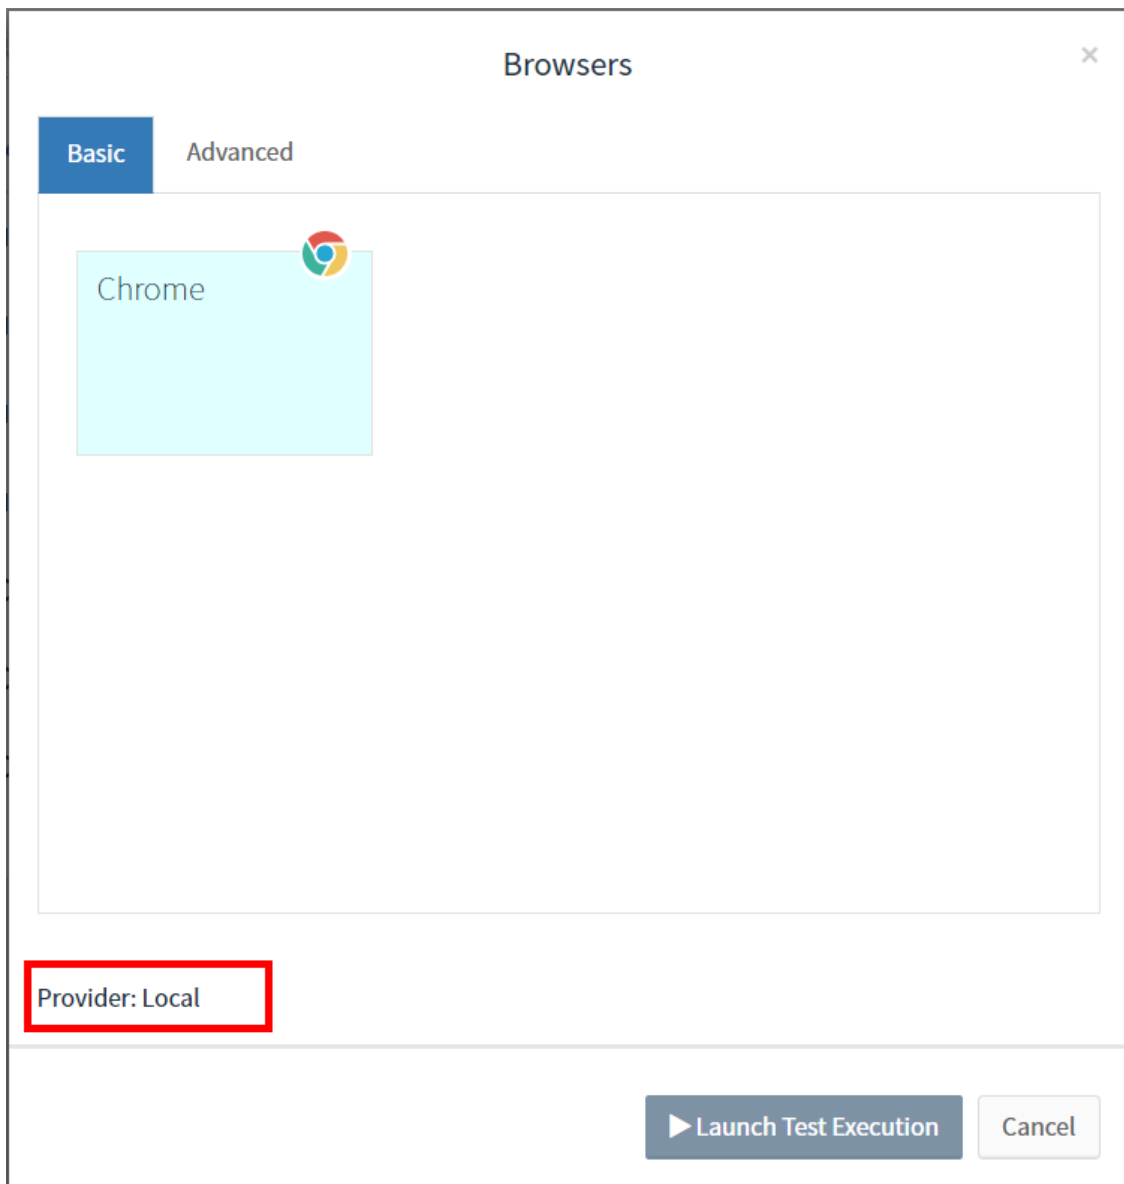


5.1.2. Schedule test executions


Go to the configurations of a project and open the `Browsers` tab to see the currently configured browsers.

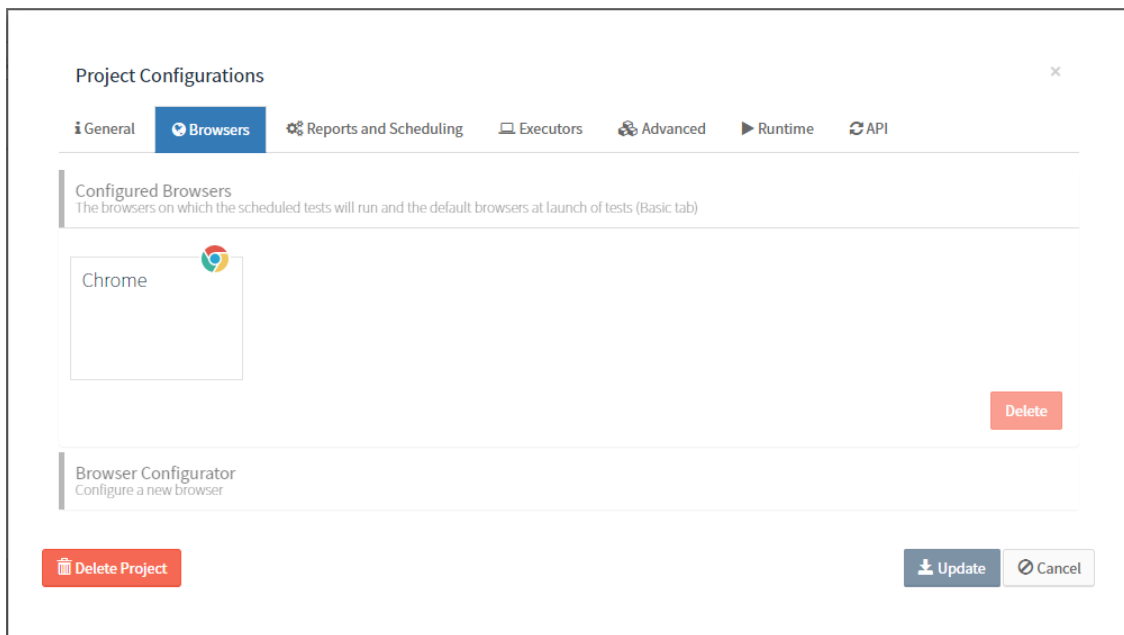

Click on **Browser Configurator** and add more browsers if needed.

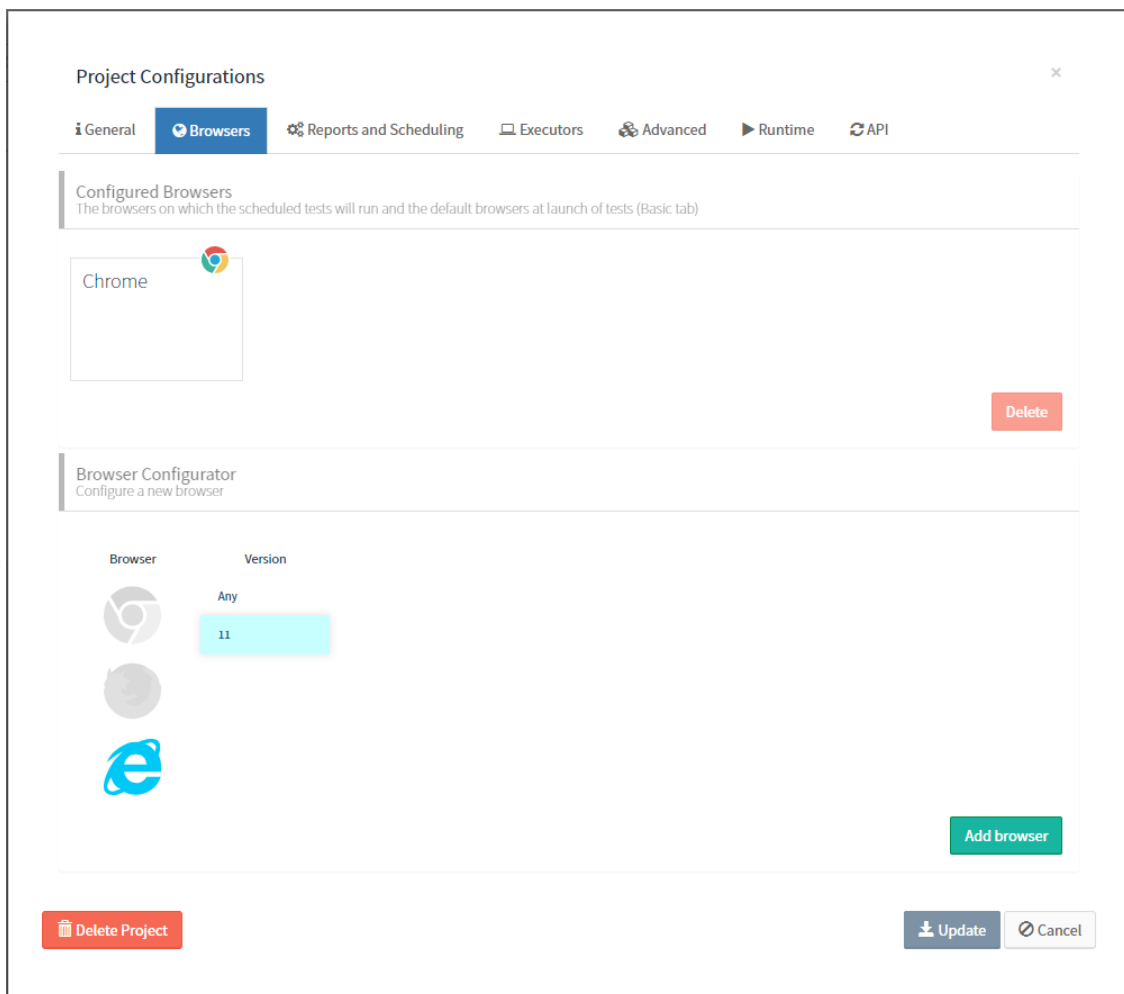


To schedule test executions on the configured browsers, switch to the **Reports and Scheduling** tab.

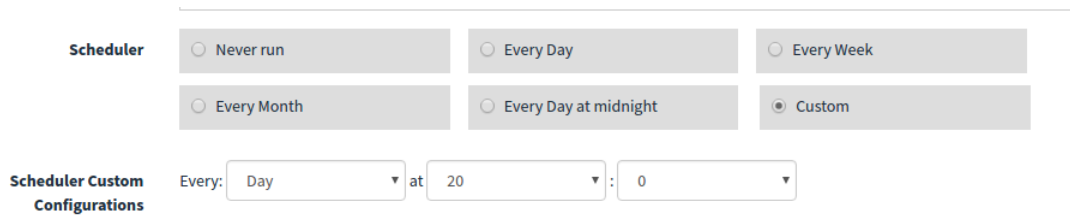

The Scheduler configuration interface shows a 'Scheduler' section with six radio button options: 'Never run', 'Every Day', 'Every Week', 'Every Month', 'Every Day at midnight', and 'Custom'. The 'Custom' option is selected. Below this is the 'Scheduler Custom Configurations' section, which includes a form with 'Every:' set to 'Day', 'at' set to '20', and a time set to '0'.

Multiple Providers

With multiple providers, the **Browsers** tab has an extra field to configure the default provider.

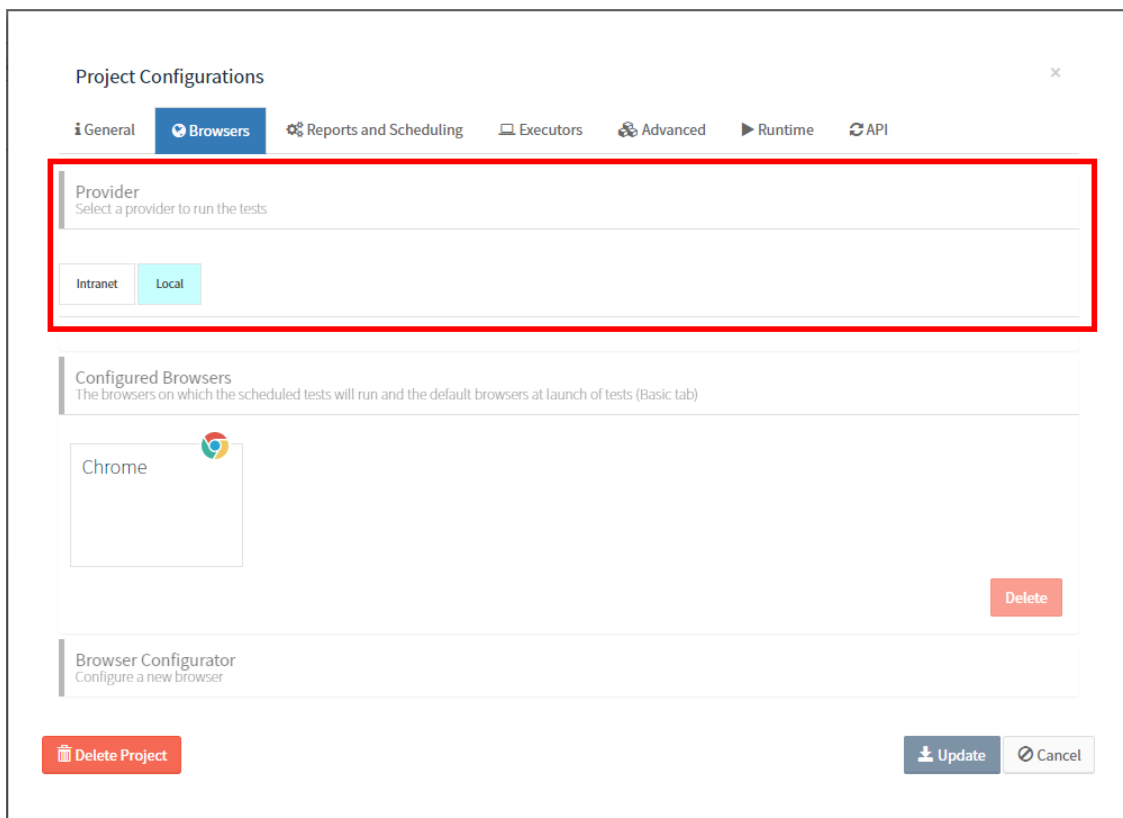

The 'Project Configurations' dialog box is shown with the 'Browsers' tab selected. A red box highlights the 'Provider' section, which includes a dropdown menu labeled 'Select a provider to run the tests' and two buttons: 'Intranet' and 'Local'. Below this is the 'Configured Browsers' section, which lists 'Chrome' with a 'Delete' button. At the bottom, there is a 'Browser Configurator' section and buttons for 'Delete Project', 'Update', and 'Cancel'.




Note:


This configuration is not available at the Monitoring projects.

5.1.3. REST API

Minium Manager provides a REST API through which it is possible to launch test executions and get test results. In order to use it, an API key is required. API key's are specific of a project. To generate a key, go to the **API** tab on the configurations of a project and click on the **Generate** button.

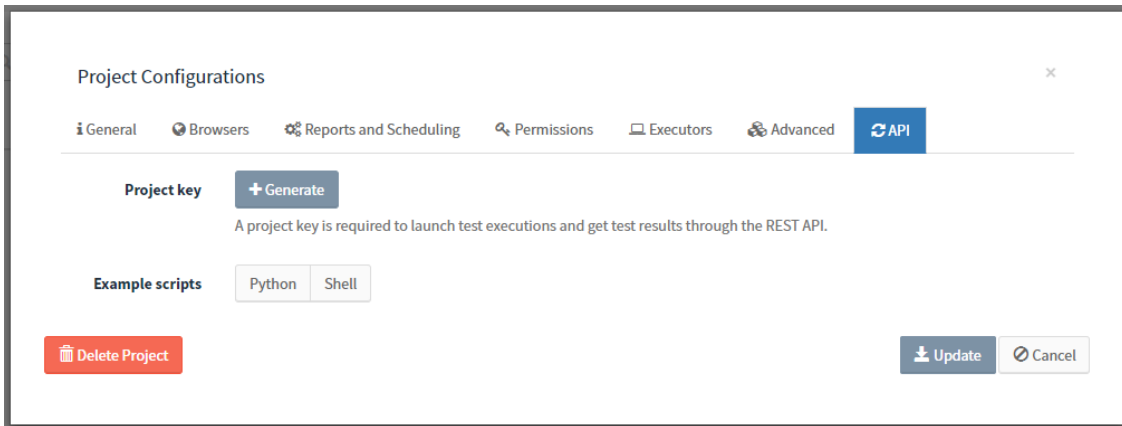

Also, on the `API` tab are some example scripts. Once the project has an API key, the scripts will be fulfilled with the project-specific data and ready to use. The first part of the script shows how to launch a test execution.

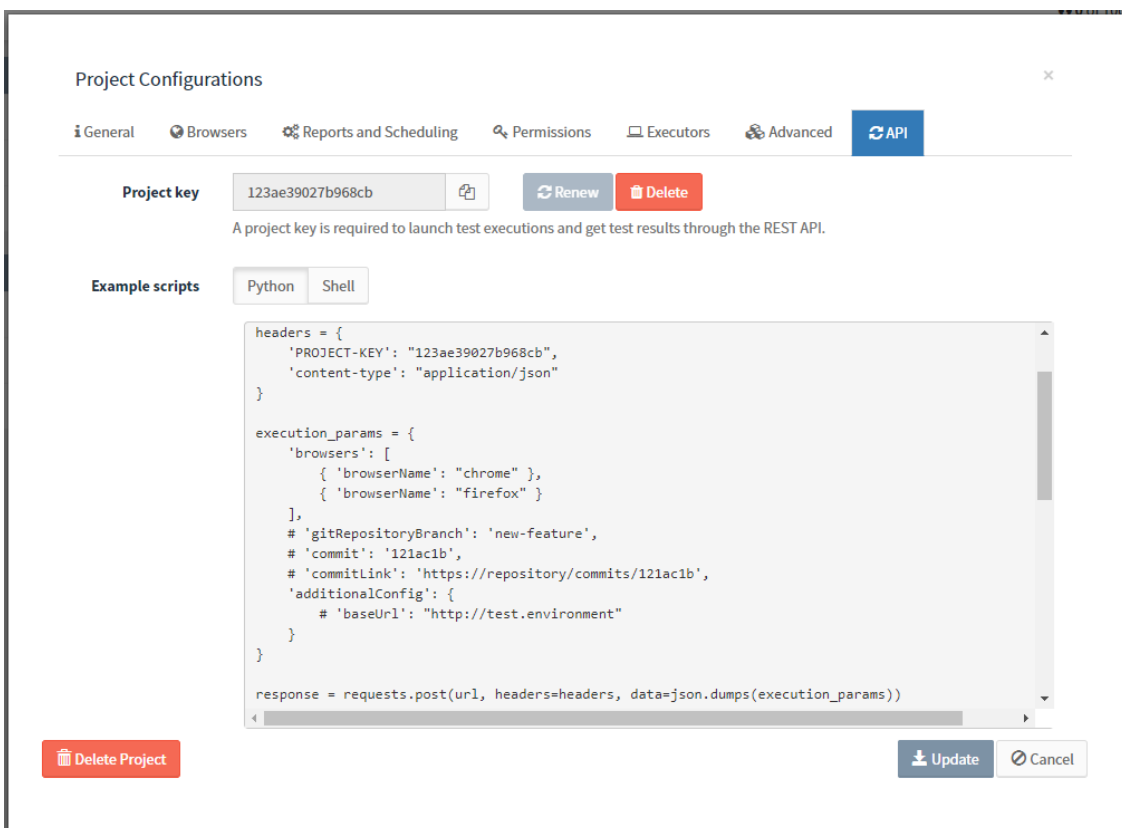

```

headers = {
    'PROJECT-KEY': "123ae39027b968cb",
    'content-type': "application/json"
}

execution_params = {
    'browsers': [
        { 'browserName': "chrome" },
        { 'browserName': "firefox" }
    ],
    # 'gitRepositoryBranch': 'new-feature',
    # 'commit': '121ac1b',
    # 'commitLink': 'https://repository/commits/121ac1b',
    'additionalConfig': {
        # 'baseUrl': "http://test.environment"
    }
}

response = requests.post(url, headers=headers, data=json.dumps(execution_params))

```

A test execution can be launched by issuing a `POST` request to `api/projects/<PROJECT-ID>/test-executions` containing the `PROJECT-KEY` header set to the project key, and the `content-type` header set to `application/json`. The execution parameters are sent in JSON on the request body:

- **browsers**: list containing the capabilities of the browsers. Only the `browserName` is mandatory.
- **additionalConfig** (optional): configuration properties to be merged with the ones on the `application.yml` file of the project. Properties already defined on the

`application.yml` file are overridden.

- **gitRepositoryBranch** (optional): branch of the repository of the tests.
- **commit** (optional): the corresponding commit of the system under test, to be then included on the report of the execution.
- **commitLink** (optional): link to directly access the commit from Minium Manager.

To follow the progress of the execution until it finishes, poll the URL returned on the `Location` header of the response to the `POST` request.

```
url = response.headers['location']
response = requests.get(url, headers=headers)
while response.status_code == 404:
    time.sleep(5)
    response = requests.get(url, headers=headers)
if not response.ok: sys.exit(response.text)

execution = response.json()
while execution['state'] != "FINISHED":
    time.sleep(15)
    execution = requests.get(url, headers=headers).json()
```

While the tests are running, the response will be a JSON object containing the `state` field set to `RUNNING`, the name of the current browser and the corresponding progress in percentage, number of passed/failed and last finished feature/scenario. Example:


```
{
  "state": "RUNNING",
  "browser": "chrome",
  "progressInPercentage": 18,
  "failingScenariosCount": 1,
  "passingScenariosCount": 5,
  "feature": "Login",
  "scenario": "Successful login"
}
```

Once the execution finishes, the response will have `state FINISHED`, the global results and the number of passed/failed scenarios for each browser. Example:

```
{
  "state": "FINISHED",
  "globalResults": {
    "totalScenarios": 20,
    "percentageOfPassingScenarios": 95,
    "passingScenarios": 19,
    "failingScenarios": 1
  },
  "browserResults": [
    {
      "browser": {
        "browserName": "chrome"
      },
      "passedScenarios": 10,
      "failedScenarios": 0
    },
    {
      "browser": {
        "browserName": "firefox"
      },
      "passedScenarios": 9,
      "failedScenarios": 1
    }
  ]
}
```

5.2. Follow the progress of a test execution

After launching a test execution, follow the progress in the project page. See the browser where the test is executing, the percentage, number of executed tests, the elapsed time and the test that is currently executing. Also, visualize the test be executed in the browser.

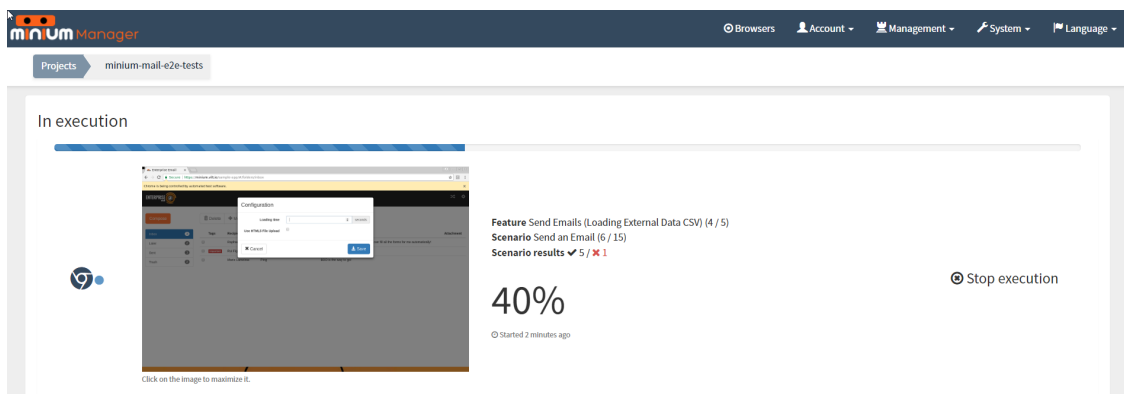

minium Manager

Projects minium-mail-e2e-tests

In execution

40%


Feature Send Emails (Loading External Data CSV) (4 / 5)
Scenario Send an Email (6 / 15)
Scenario results 5 / 1

Stop execution

Started 2 minutes ago

6. Monitor test results

In a project page, all the launched executions are showed:

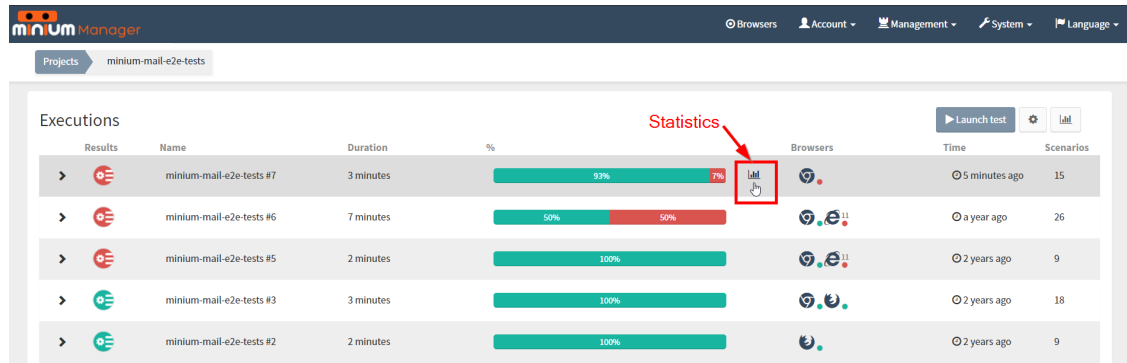


Results	Name	Duration	%	Browsers	Time	Scenarios
>	minium-mail-e2e-tests #7	3 minutes	93% 7%	🔍	🕒 5 minutes ago	15
>	minium-mail-e2e-tests #6	7 minutes	50% 50%	🔍	🕒 a year ago	26
>	minium-mail-e2e-tests #5	2 minutes	100%	🔍	🕒 2 years ago	9
>	minium-mail-e2e-tests #3	3 minutes	100%	🔍	🕒 2 years ago	18
>	minium-mail-e2e-tests #2	2 minutes	100%	🔍	🕒 2 years ago	9

For each execution it can be seen:

- result of the execution
- name
- duration of execution
- percentage of passed and failing scenarios
- statistics of the execution (shown when the mouse is over the execution)
- browser where the execution ran
- launch time
- number of scenarios of the execution

When expands a test execution a list of executed features, and their results can be seen:

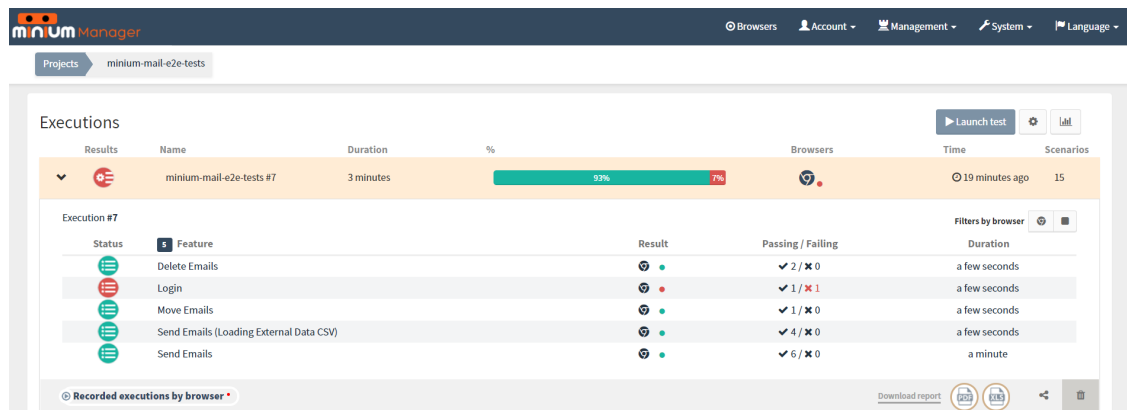

Results	Name	Duration	%	Browsers	Time	Scenarios
▼	minium-mail-e2e-tests #7	3 minutes	93% 7%	🔍	🕒 19 minutes ago	15


Status	Feature	Result	Passing / Failing	Duration
🟢	Delete Emails	🟢	✓ 2 / ✗ 0	a few seconds
🔴	Login	🔴	✓ 1 / ✗ 1	a few seconds
🟢	Move Emails	🟢	✓ 1 / ✗ 0	a few seconds
🟢	Send Emails (Loading External Data CSV)	🟢	✓ 4 / ✗ 0	a few seconds
🟢	Send Emails	🟢	✓ 6 / ✗ 0	a minute

For the execution expanded it can be seen:

- features tested
- the results detailed for each feature (with filters)
- videos of the execution

- download the report of the executions (MS excel and PDF)
- remove execution

Click at "Recorded executions by browser" to see the videos of the recorded executions:

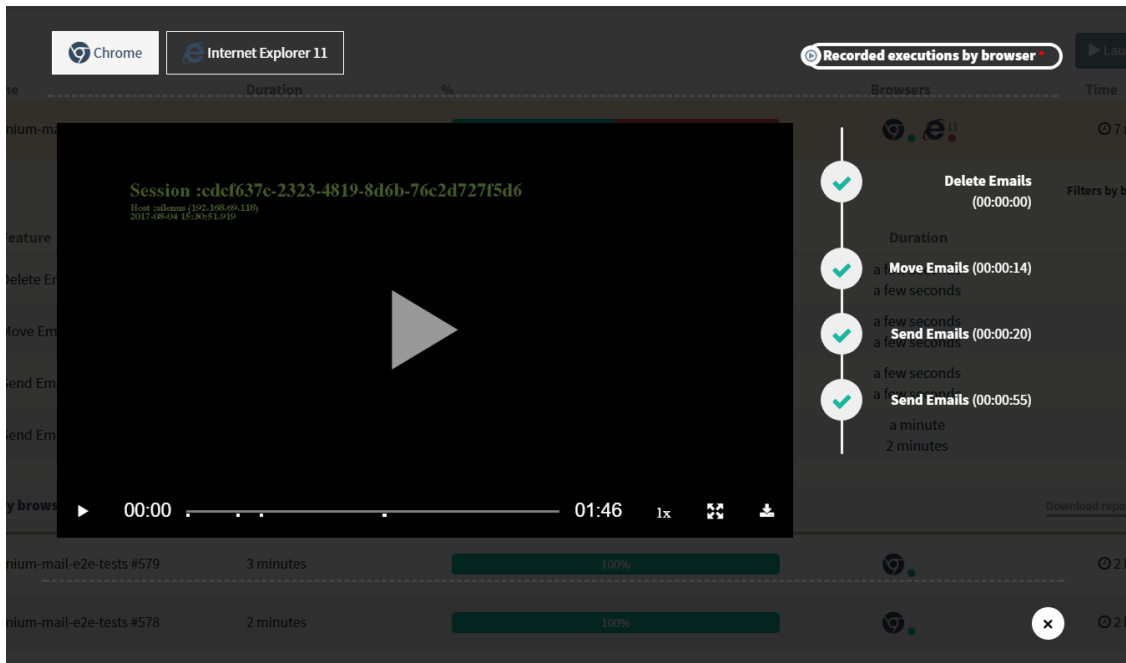


For the videos (at execution) it can be seen:

- videos for the browsers tested
- features to navigate through the video
- cue points when the feature starts on the video

Monitoring project

The result of an execution of a Monitoring project is presented at the execution page:

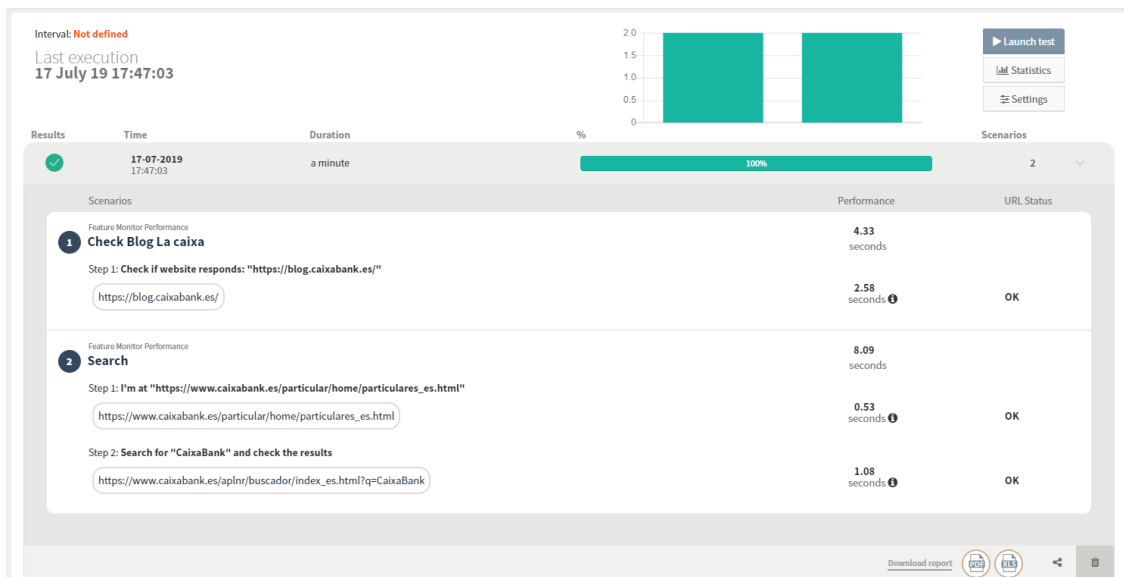


At execution page, we can see the time of each URL took to load. Also, we can see the URL status, and the time it took to execute the scenario.

Display options

The information at the execution page can be filtered to show/hide some details.

To open the `Display options` click at `Settings`:

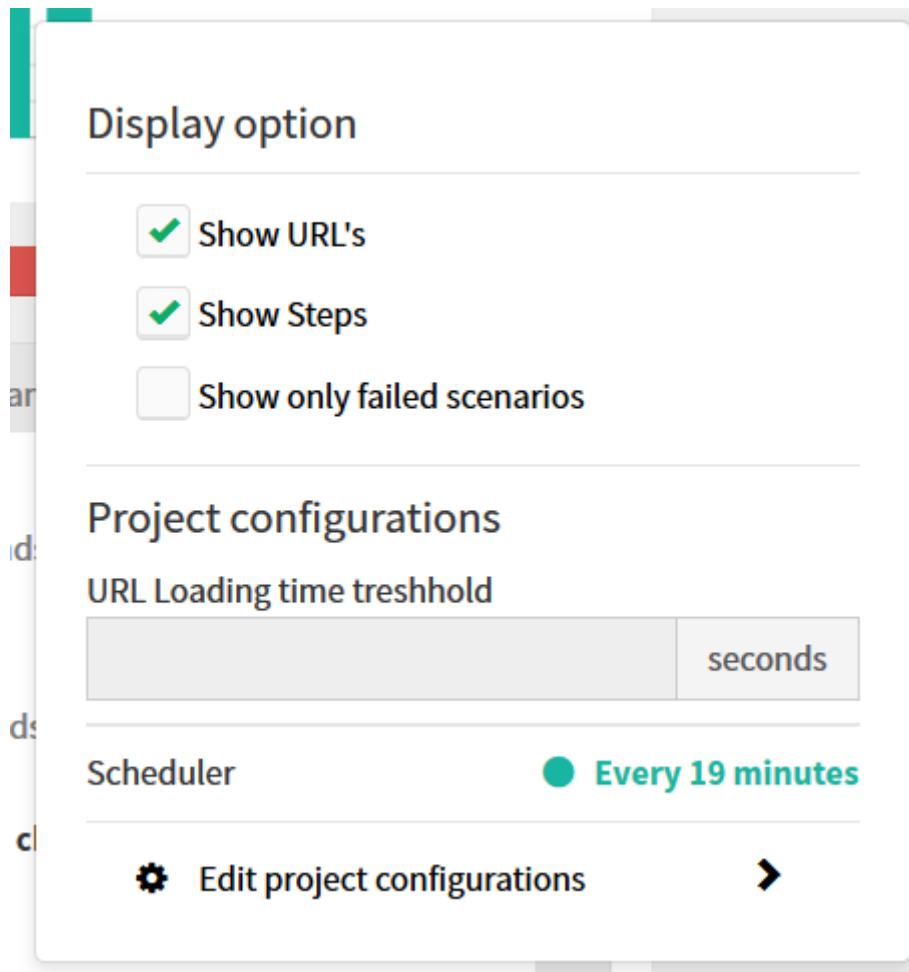

The screenshot shows a configuration window with two main sections. The first section, 'Display option', contains three checkboxes: 'Show URL's' (checked), 'Show Steps' (checked), and 'Show only failed scenarios' (unchecked). The second section, 'Project configurations', includes a 'URL Loading time treshhold' (sic) with a text input field and a 'seconds' unit label. Below this is a 'Scheduler' section showing a green circle icon and the text 'Every 19 minutes'. At the bottom, there is a gear icon and the text 'Edit project configurations' followed by a right-pointing arrow.

The display options allow us to:


- Show/Hide the URL's
- Show/Hide the steps
- Show only the failed scenarios
- Consult the URL loading time threshold (This property is configured at the project configurations at the advanced tab and warns the user (at the execution page) when the loading time of a URL is higher than the loading time threshold)
- Consult the scheduler (The scheduled is configured at the project configurations at the reports and scheduling tab)

Cookie project

The Cookie project is divided in two projects: Cookie Report project and Cookie Crawler project.

Cookie Report project

The result of an execution of a Cookie Report project is presented at the execution page:

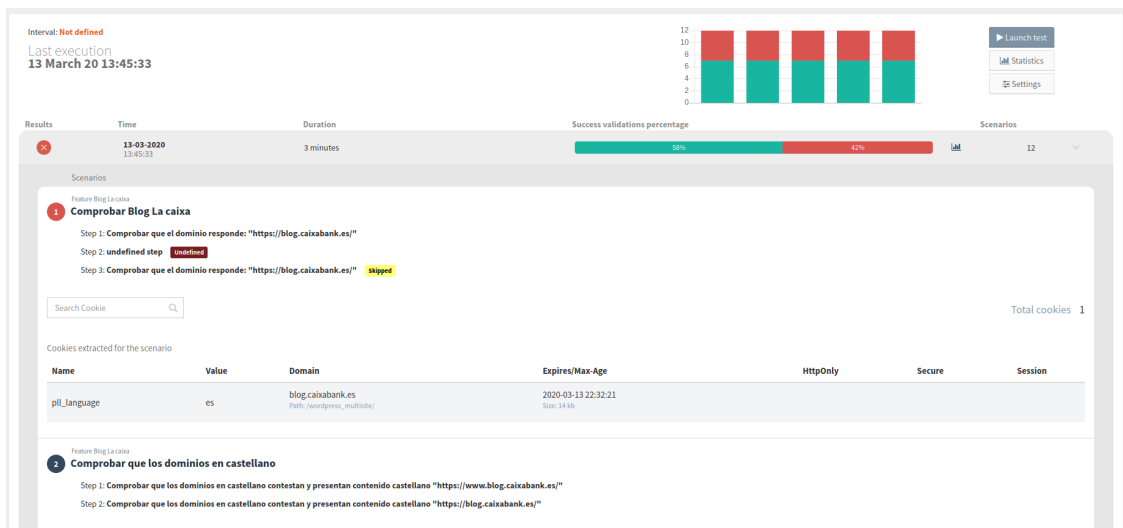


At execution page, we can see at the end of each scenario a table (with a filter) of all browser cookies at the end of a scenario.

Display options

The information at the execution page can be filtered to show/hide some details.

To open the `Display options` click at `Settings`:

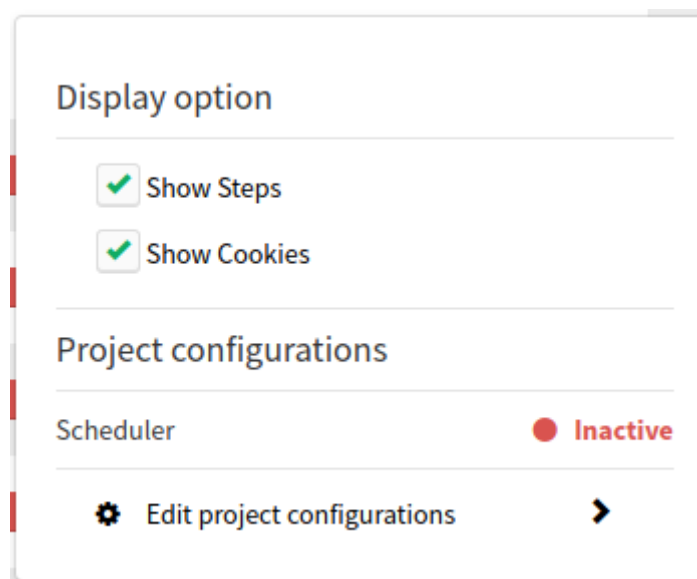

The display options allow us to:

- Show/Hide the steps
- Show/Hide the cookies table
- Consult the scheduler (The scheduled is configured at the project configurations at the reports and scheduling tab)

Cookie Crawler project


The Cookie Crawler project generates a report of the all browser cookies found during the crawl of the websites.

For each execution it can be seen:

- URL crawler - The URL(s) that was crawled
- Filters - Domains filtered
- Cookies Accepted - Tells whether the cookie warning was accepted or not
- Cookies to validate - Cookies validated during the crawl (click at the eye to see the validations in a table)
- Max Depth - Depth of the crawl
- Validation failed - The cookies not found at the report
- Total Cookies (Distinct by name) - Number of different cookies found at the report distinct by name
- Total cookies - Number of different cookies found at the report
- Total URLs - Number of different URLs crawled

There are several tabs to present execution information: Summary, Cookie table and URLs tree.

Summary:

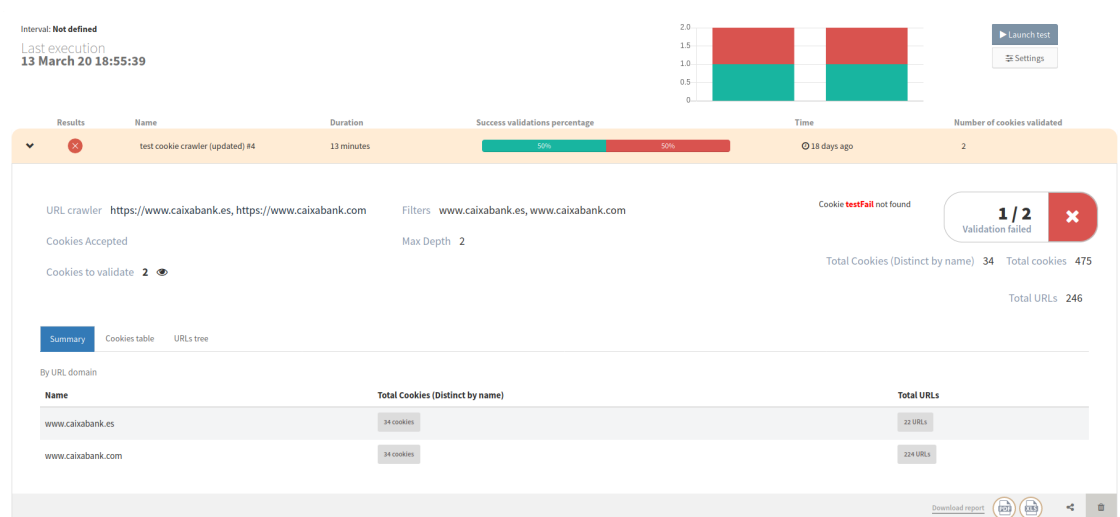

This table presents the information By URL domain.

For the screenshot above we can see that for the domain `www.caixabank.es`, we found 34 cookies (Distinct by name) in a total of 22 URLs.

Cookie table:

Results	Name	Duration	Success validations percentage	Time	Number of cookies validated
test cookie crawler (updated) #4		13 minutes	50%	18 days ago	2

URL crawler	https://www.caixabank.es, https://www.caixabank.com	Filters	www.caixabank.es, www.caixabank.com	Cookie testFail not found	1 / 2 Validation failed
Cookies Accepted		Max Depth	2	Total Cookies (Distinct by name)	34
Cookies to validate	2			Total cookies	475
				Total URLs	246

[Summary](#)
[Cookies table](#)
[URLs tree](#)

#	Name	Value	Domain	Expires/Max-Age	HttpOnly	Secure	Session	URLs
246	AMCVS_3A3F337B54E77B700A4C98A1%40...	1	.caixabank.com	Session Size: 42 kb			✓	https://www.caixabank.es/ + 245 urls...
246	everest_session_v2	XmvXUAAAkRd3-	.everesttech.net	Session Size: 24 kb			✓	https://www.caixabank.es/ + 245 urls...
246	AMCVS_3A3F337B54E77B700A4C98A1%40...	1	.caixabank.es	Session Size: 42 kb			✓	https://www.caixabank.es/ + 245 urls...
246	mustShowFormExecuted	true	.caixabank.es	2020-03-14 18:56:17 Size: 24 kb				https://www.caixabank.es/ + 245 urls...
246	dpm	47597570860354295630209158263720582578	.dpm.demdex.net	2020-09-09 19:56:16 Size: 41 kb		✓		https://www.caixabank.es/ + 245 urls...
246	everest_g_v2	g_surferid-XmvXUAAAkRd3-	.everesttech.net	2022-03-13 18:56:16 Size: 28 kb				https://www.caixabank.es/ + 245 urls...

This table presents the all the cookie's information retrieved at the crawler for the URL(s) crawled, and the URL(s) where the cookie was found.

URLs tree:

Results	Name	Duration	Success validations percentage	Time	Number of cookies validated
test cookie crawler (updated) #4		13 minutes	50%	18 days ago	2

URL crawler	https://www.caixabank.es, https://www.caixabank.com	Filters	www.caixabank.es, www.caixabank.com	Cookie testFail not found	1 / 2 Validation failed
Cookies Accepted		Max Depth	2	Total Cookies (Distinct by name)	34
Cookies to validate	2			Total cookies	475
				Total URLs	246

[Summary](#)
[Cookies table](#)
[URLs tree](#)

[https://www.caixabank.es/](#) 26 Cookies found

[https://www.caixabank.com/](#) 26 Cookies found

Name	Value	Domain	Expires/Max-Age	HttpOnly	Secure	Session
aam_uid	47597570860354295630209158263720582578	.caixabank.es	2020-04-12 19:56:18 Size: 46 kb			
AMCV_3A3F337B54E77B700A4C98A1%40AdobeOrg	1585540135%7CMCIDT5%7C18335%7CMCMID%7C4756573323065208308021044...	.caixabank.es	2022-03-13 18:56:19 Size: 304 kb			
AMCV_3A3F337B54E77B700A4C98A1%40AdobeOrg	-1303530583%7CMCMID%7C24087826510513242124459498862837313298%7CM...	.caixabank.com	2022-03-13 18:56:16 Size: 273 kb			
AMCVS_3A3F337B54E77B700A4C98A1%40AdobeOrg	1	.caixabank.com	Session Size: 42 kb			✓

This view shows the URLs tree generated by the crawl, with the cookies found for each URL.

Display options

The information at the execution page can be filtered to show/hide some details.

To open the `Display options` click at `Settings`:

Display option

☐ Show new cookies only (Tree view)
 ☒ Show all cookie information (Table view)

Project configurations

Max Depth

2

Accept Cookies

☒

Number of Validation(s)

2

Scheduler

Inactive

⚙️


Edit project configurations

>

The display options allow us to:

- Show new cookies only (Tree view) - Only shows the new cookies at the URLs tree in the child levels. The default is show every cookie (even the repeated ones).
- Show all cookie information (Table view) - Shows all the cookie information (this is the fields: domain, Expires/Max-Age, HttpOnly, Secure and Session). The default is to show the Name, Value and URLs aggregated.
- Max Depth - The Max depth configured at project configurations
- Accept Cookies - Shows if accept cookies are checked or not at project configurations
- Number of Validation(s) - Shows the number of validations configured at project configurations
- Consult the scheduler (The scheduled is configured at the project configurations at the reports and scheduling tab)

On the feature (for web application testing) view check the scenarios of this particular feature:

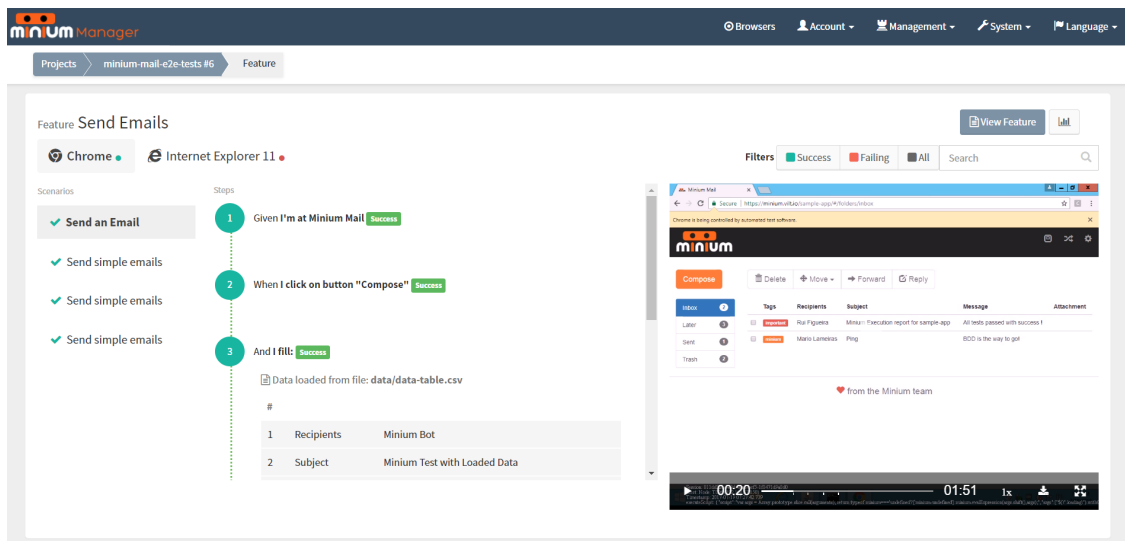


When expands a scenario see all the steps and results. Is easily switch to the results of another browser. More functionalities:

- **Screenshots** - Minium Manager provides screenshots of the application at the moment of the failure. So it possible see the state of the application in the moment of failure.
- **Error messages**
- **Links to the feature or step file for each step.**
- **Evolution chart for the projects**
- **Video with the cue points when the scenarios start**

Monitoring project

Feature page of a Monitoring project scenario:

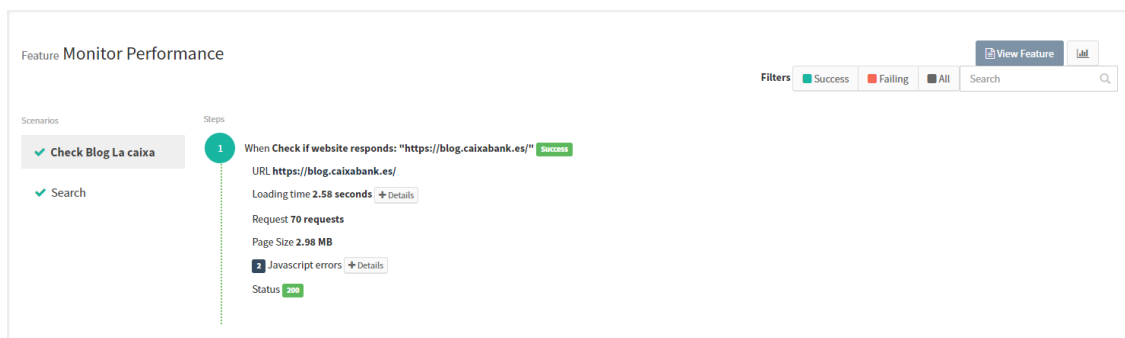


At the feature page, we can see more details about the page load performance:

- The url loaded
- The loading time with the times of the Backend Performance, Frontend Performance and DOM Content Loading
- The number of requests
- The Javascript Errors (if any)

- The URL status code

Cookie project

Feature page of a Cookie Report project scenario:

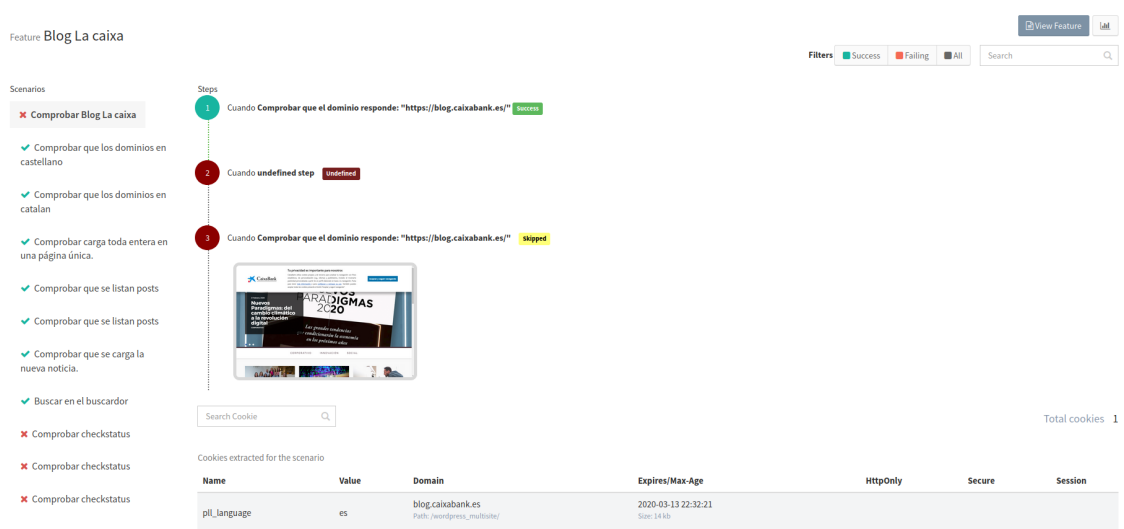

Feature **Blog La caixa**

Filters: Success, Failing, All

Scenarios

- ✗ Comprobar Blog La caixa
- ✓ Comprobar que los dominios en castellano
- ✓ Comprobar que los dominios en catalan
- ✓ Comprobar carga toda entera en una página única.
- ✓ Comprobar que se listan posts
- ✓ Comprobar que se listan posts
- ✓ Comprobar que se carga la nueva noticia.
- ✓ Buscar en el buscador
- ✗ Comprobar checkstatus
- ✗ Comprobar checkstatus
- ✗ Comprobar checkstatus

Steps

- 1 Cuando Comprobar que el dominio responde: "https://blog.caixabank.es/" **Success**
- 2 Cuando undefined step **Undefined**
- 3 Cuando Comprobar que el dominio responde: "https://blog.caixabank.es/" **skipped**

Search Cookie

Total cookies 1

Cookies extracted for the scenario

Name	Value	Domain	Expires/Max-Age	HttpOnly	Secure	Session
pll_language	es	blog.caixabank.es Path: /wordpress_multisite/	2020-03-13 22:32:21 Size: 14 kb			

We can see at the end of each scenario a table (with a filter) of all browser cookies.




Note:

The Feature overview page is not available to the Cookie Crawler project.

6.1. Feature overview

Overview of all the features, by clicking on the button View Feature.

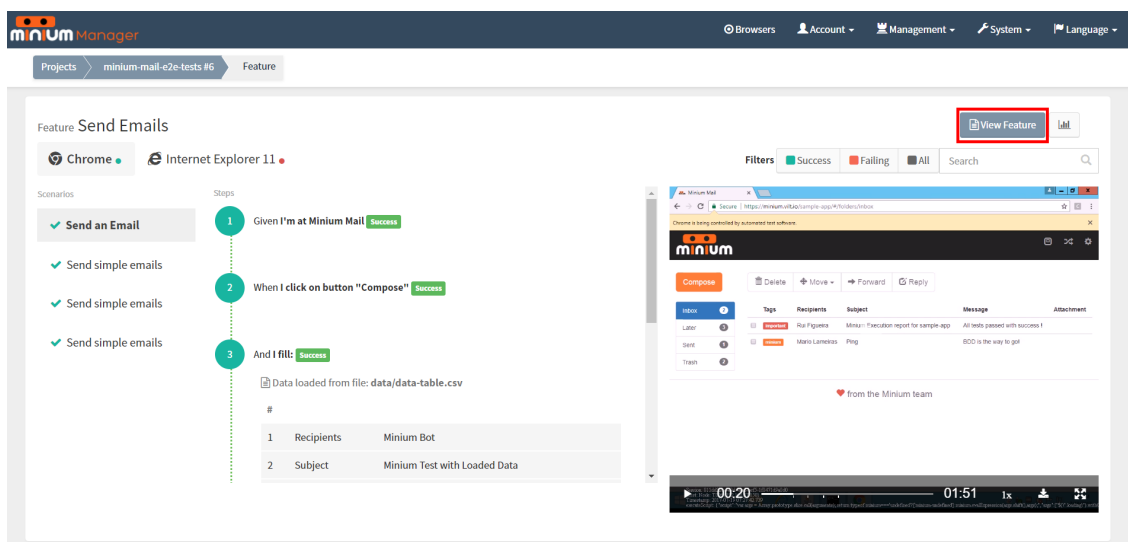

minium Manager

Projects > minium-mail-e2e-tests #6 > Feature

Feature **Send Emails**

Filters: Success, Failing, All

Scenarios

- ✓ Send an Email
- ✓ Send simple emails
- ✓ Send simple emails
- ✓ Send simple emails

Steps

- 1 Given I'm at Minium Mail **Success**
- 2 When I click on button "Compose" **Success**
- 3 And I fill: **Success**

Data loaded from file: data/data-table.csv

#	Recipients	Minium Bot
1	Recipients	Minium Bot
2	Subject	Minium Test with Loaded Data

00:20 01:51 1x

View the result of each step in each browser that the feature ran.

Delete Emails

Background:

- Given I'm at Minium Mail

Scenario: Delete an email

- Given an email with Subject "Minium Can!" exists
- When I delete an email with Subject "Minium Can!"
- And I navigate to section "Trash"
- Then I should see an email with:

Subject	Minium Can!
Recipients	Minium Bot

Scenario: Delete an email from trash

- Given I'm at section "Trash"
- And an email with Subject "Phasellus vitae interdum nulla." exists
- When I delete an email with Subject "Phasellus vitae interdum nulla."
- Then I shouldn't see an email with:

Subject	Minium Can!
---------	-------------

Close

6.2. Reports

Receive the reports of each test execution, in `PDF` and/or `Excel` formats, via email. Alternatively, download them directly in Minium Manager. To choose the formats to receive via email, go to the configurations of the project and expand the advanced configurations:

Emails

Recipients

Email addresses to receive reports of the executions

☐ Send only when there are test failures

Report formats

PDF

XLSX

To download a report, expand the results of a test execution and click in `Download report`:

Executions

Launch test

⚙️

⌂

Results	Name	Duration	%	Browsers	Time	Scenarios
🚩	minium-mail-e2e-tests #7	3 minutes	93% 7%	🌐	🕒 26 minutes ago	15

Execution #7

Filters by browser

Status	Feature	Result	Passing / Failing	Duration
🟢	Delete Emails	🟢	✓ 2 / ✗ 0	a few seconds
🔴	Login	🔴	✓ 1 / ✗ 1	a few seconds
🟢	Move Emails	🟢	✓ 1 / ✗ 0	a few seconds
🟢	Send Emails (Loading External Data CSV)	🟢	✓ 4 / ✗ 0	a few seconds
🟢	Send Emails	🟢	✓ 6 / ✗ 0	a minute

Recorded executions by browser

Download report

PDF

XLSX

6.3. Daily Reports

The daily report is a custom report with your favorite projects that will be sent to your email with the status of the last completed execution in the last 24 hours.

Before being able to configure a daily report, first you need to set the email configured at [Account](#) > [Settings](#).



Note:

If Minium Manager is using LDAP, please contact your administrator to set your email at LDAP.

To create a daily report configuration, open the [Account](#) menu and click on [Daily Reports](#).

Choose the projects to be included in your custom daily report:

Projects

Choose the projects to be included in your custom daily report.

☐	Name	Groups	Labels
☐	authenticated_project		
☐	google-test-git	qa.team	staging
☐	google-test-svn		
☐	minium-mail-e2e-tests	minium.team eng.team qa.team	prod
☐	test		
☐	test-jvm-project		
☐	unauthenticated_project		

Show 10 Projects

Previous 1 Next

Project(s) selected:

Total selected: 0

None

After, schedule the time the email will be sent, with a summary of the past 24h.

Scheduling


The report will be sent at the time you configure, with a summary of the past 24h.

Every: Day at 6 : 0

Finally, click on the button "Create/Update Daily Report Configuration" to create/update the

daily reports:

Daily report of the past 24h (with errors) [Inbox x](#)

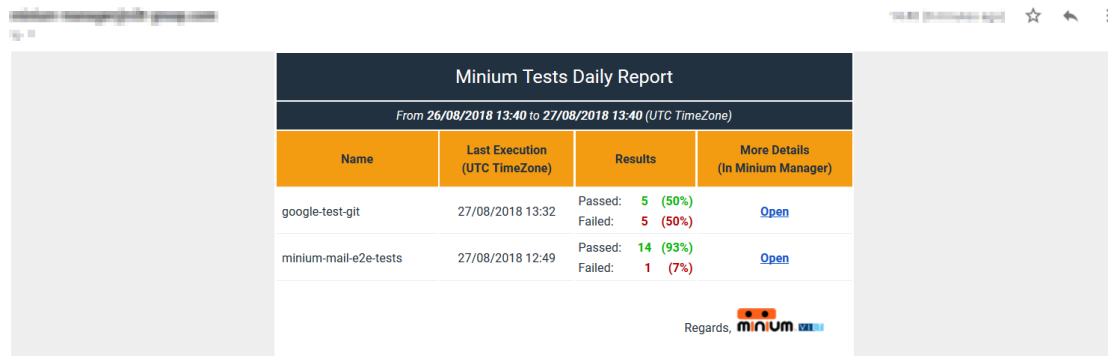

Minium Tests Daily Report			
From 26/08/2018 13:40 to 27/08/2018 13:40 (UTC TimeZone)			
Name	Last Execution (UTC TimeZone)	Results	More Details (In Minium Manager)
google-test-git	27/08/2018 13:32	Passed: 5 (50%) Failed: 5 (50%)	Open
minium-mail-e2e-tests	27/08/2018 12:49	Passed: 14 (93%) Failed: 1 (7%)	Open

Regards, 

To delete the configuration, click on the button "Delete Daily Report Configuration".

The daily report was configured to be sent at **06:00** with the status of the last completed execution in the last 24 hours for the following projects:

- authenticated_project
- google-test-git
- google-test-svn
- minium-mail-e2e-tests
- test
- test-jvm-project
- unauthenticated_project


[Change Daily Report Configuration](#)

[Delete Daily Report Configuration](#)

6.4. Data Extraction Reports

The Data extraction report is a custom report (in excel format) with your favorite projects that will be sent to the specified email addresses with the status of the last completed execution, and the project details.

To create and/or consult the data extraction reports configurations, open the [Management](#) menu and click on [Data Extraction Report](#).

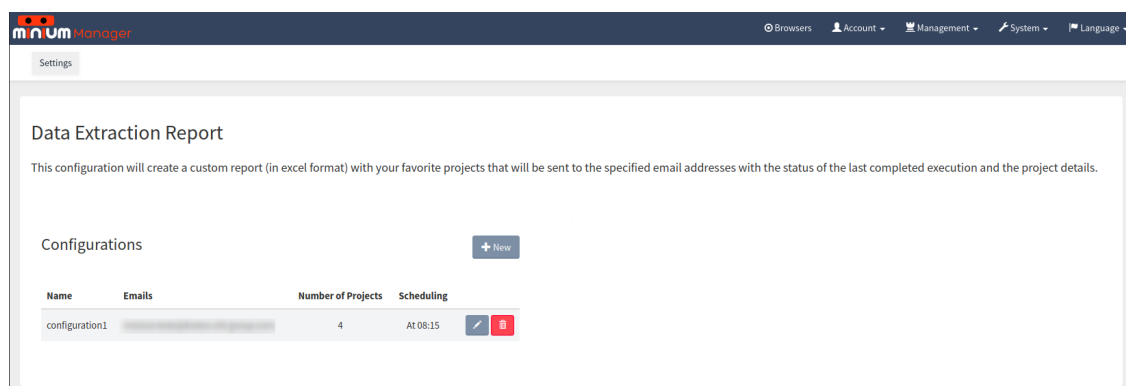

Name	Emails	Number of Projects	Scheduling
configuration1	View	4	At 08:15 Edit Delete


At the data extraction report page, you can see the current configurations created at the list

Configurations.

You can edit (by clicking in the **pencil** button) or delete (by clicking on the **trash** button) the configurations listed at the list **Configurations**.

Also, you can create a new configuration by clicking on the button + **New**.

When you click the button + **New**, a form will appear (similar to the edit form) on the right side of the page:

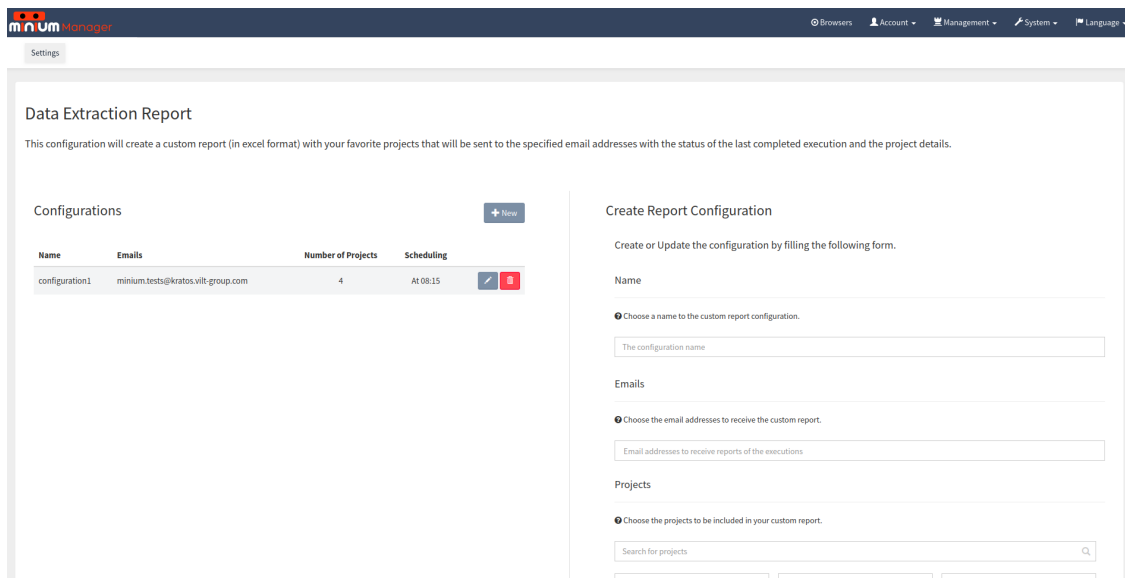

To create a new configuration, fill the form by add a new configuration name (unique value), the emails that will receive the configuration, choose the projects to be included in the report and finally, schedule the time the email will be sent, with the report.

Note:



To choose the projects, you have filters available to help. You can filter the project by name, type, group and label.

To save the configuration, click on the button + **Save**.

The email received will list a summary of the projects selected (separated by type), and will have the report (in excel format) attached.

Note:



The subject of the email received is "Data Extraction Report".

7. Roles


Roles allow granting different privileges to the users and the groups. The privileges associated with each role are described in the table below:

	User	Manager	Administrator
View projects	✓	✓	✓
Launch test executions	✓	✓	✓
Configure projects	✓	✓	✓
Create projects		✓	✓
Manage project labels		✓	✓
Manage users			✓
Manage roles			✓

7.1. Assign roles


To change the role of a user or group, navigate to **Management > Roles** at the navigation bar and:

1. Introduce the name of the user or group in the search bar.
2. Select a role.
3. Click on **Save** button.

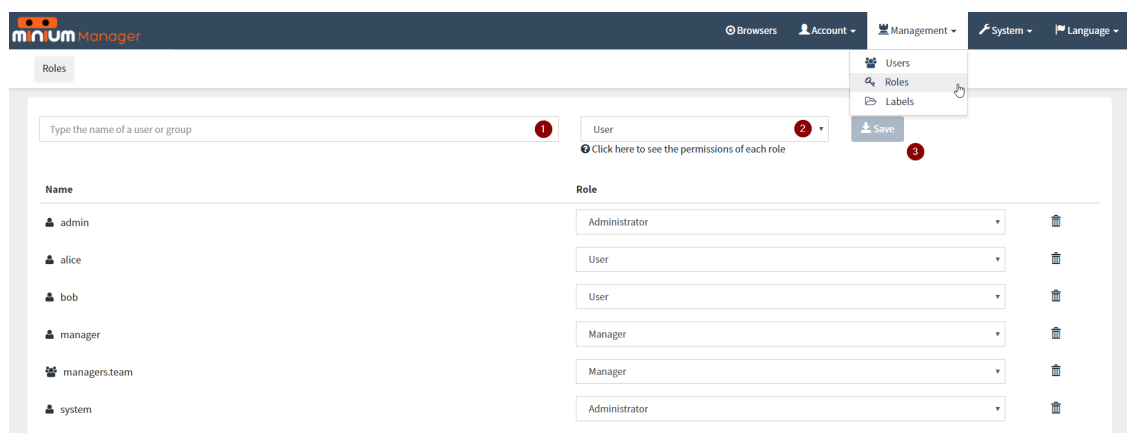


7.2. License information

At the top right of the project list page exists the license information label, that gives the number of executed scenarios in this month, and the total of scenarios per month that to the current license

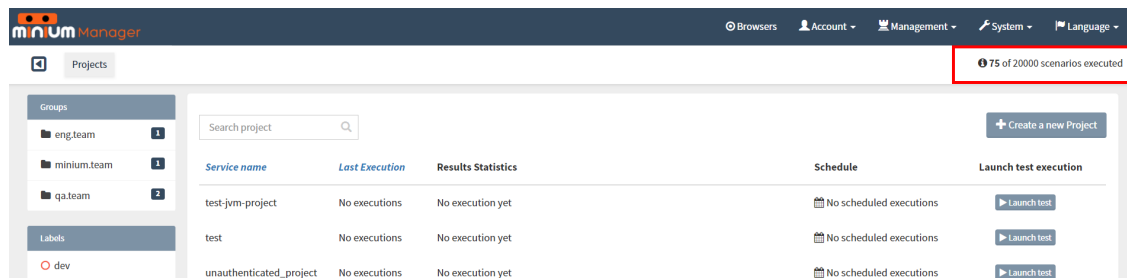

By clicking on the license information label, it will open a modal with more detailed information about one license.

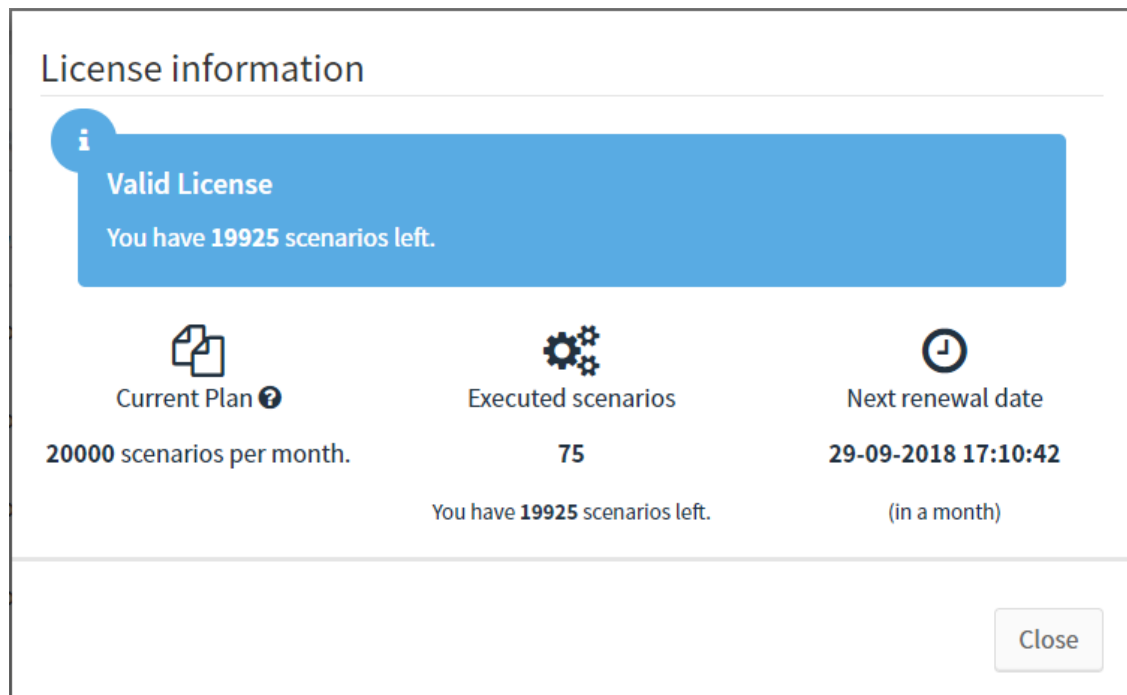

Minium Recorder User Guide

Minium Recorder has been developed to ease and accelerate the creation of Minium tests. With the **Minium Recorder**, is no longer needed to write all the code for the step definitions by hand. Simply tell to the **Minium Recorder** to start recording the interactions with the browser, perform the actions that correspond to the defined step and an automation script is immediately available in **Minium Developer**.

But what really makes Minium Recorder different in relation to other automation script recorders is that, for each element that interacts, Minium Recorder will not generate just one CSS selector. Instead, is possible choose among a list of alternative expressions for each element that take advantage of the great Minium filtering methods that are used like for example `withLabel`, `below`, `rightOf`, etc, to build more readable and resilient expressions.

8. Configure Minium Developer

Minium Recorder is already configured at **Minium Developer Prime**, but you can configure an existing **Minium Recorder**.

To configure **Minium Developer** with the **Minium Recorder** extension, first you need to download the **Minium Recorder** extension.

Navigate to the folder where **Minium Developer** is installed, create a folder named **"extensions"**, copy the **Minium Recorder** extension file to the new folder and rename the file to **"minium-recorder.crx"**.

After, edit the `config/application-{windows,linux,macos}.yaml` file in order to add the following configuration (at the chrome webdriver):

```
minium:
  developer:
    webdrivers:
      - name: chrome
      ...
    chromeOptions:
      extensions:
        - ${app.home:./}/extensions/minium-recorder.crx
      preferences:
        devtools:
          preferences:
            panel-tabOrder: "{\"chrome-
extension://ggfeclafoeoejognlebilidgmgdlogMiniumRecorder\":10,\"elements
\":20,\"console\":30,\"sources\":40,\"network\":50,\"timeline\":60,\"heap_
profiler\":70,\"resources\":80,\"security\":90,\"audits\":100}"
```

9. Launch Minium Recorder


Launch **Minium Recorder** through **Minium Developer**.

Open **Minium Developer** and add the following command to the editor:


```
browser.get("http://www.google.com/ncr")
```

This will load the google search engine website, when the instance of Chrome is launched.

To launch Minium Recorder, use the (Ctrl + Enter) shortcut or select **Run > Launch Browser** (1) and (2) at the top-right menu:

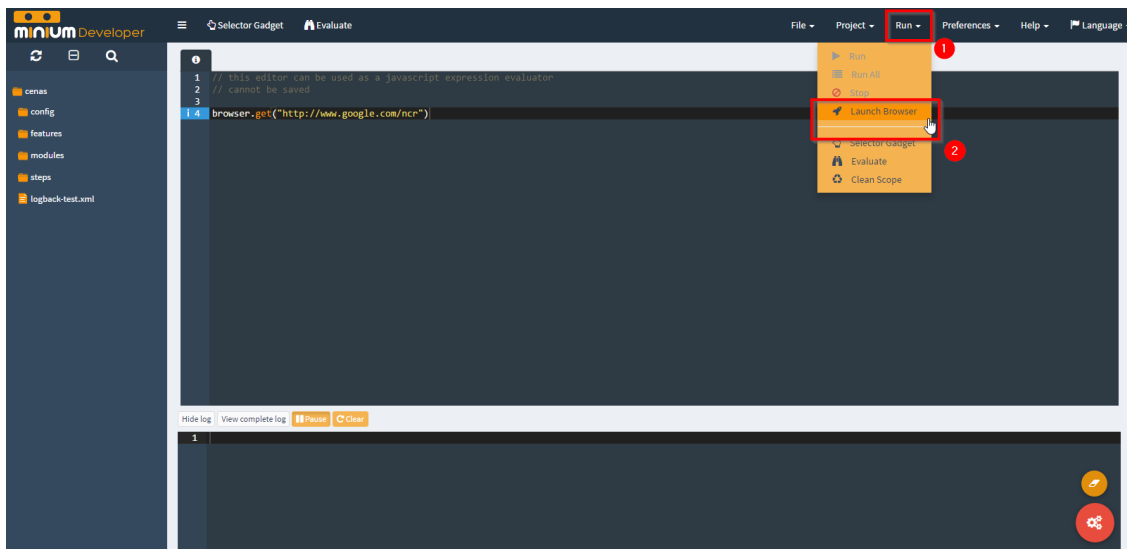


Select the **Chrome** browser (1), check if **Minium Recorder** is available (2) and click **Created a new WebDriver** (3):

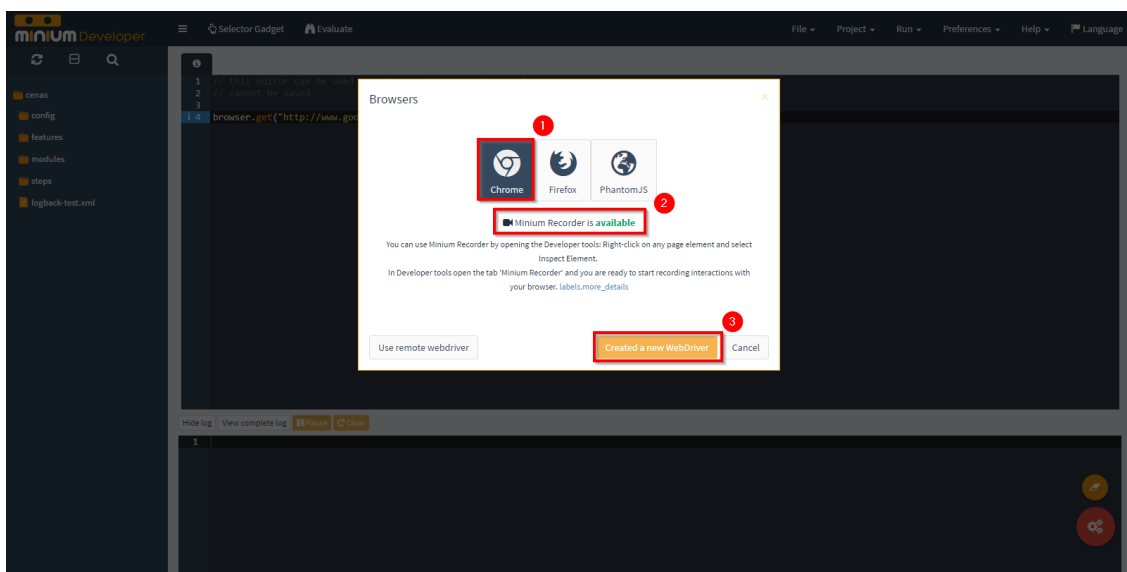


A new instance of Chrome will be launched with the Minium Recorder extension installed. In the instance of Chrome, open the `Developer tools` by using the (F12) shortcut (use another [shortcut](#)) or select `More Tools > Developer tools`.

After the `Developer tools` of the instance Chrome is opened, select the `Minium Recorder` tab (1):

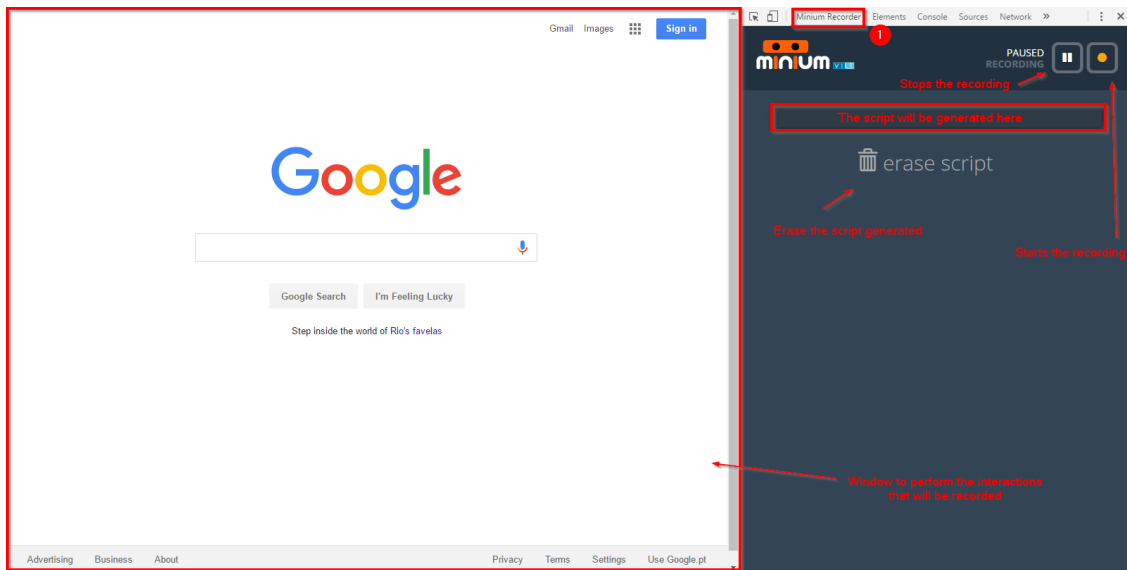

10. Start recording


To start recording, click on the following button:

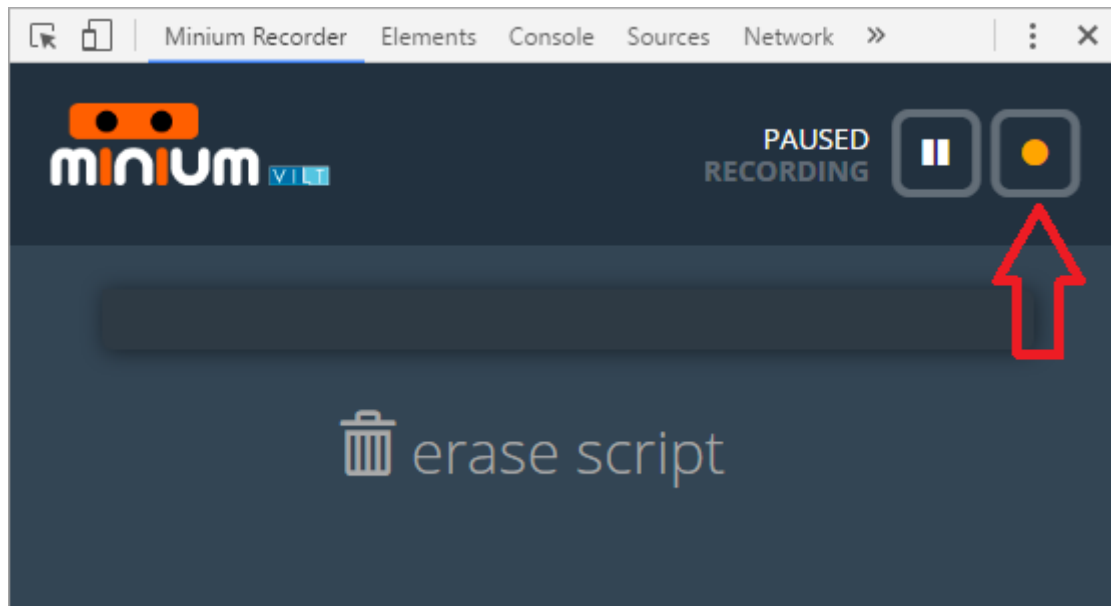


From now on, every interaction performed with the browser will be recorded.

11. Record interactions

For every action performed on the browser, like clicking on an element or filling a text input field, Minium Recorder will automatically generate the corresponding code. If typed an URL in the address bar, Minium Recorder will also generate the code to load that URL.

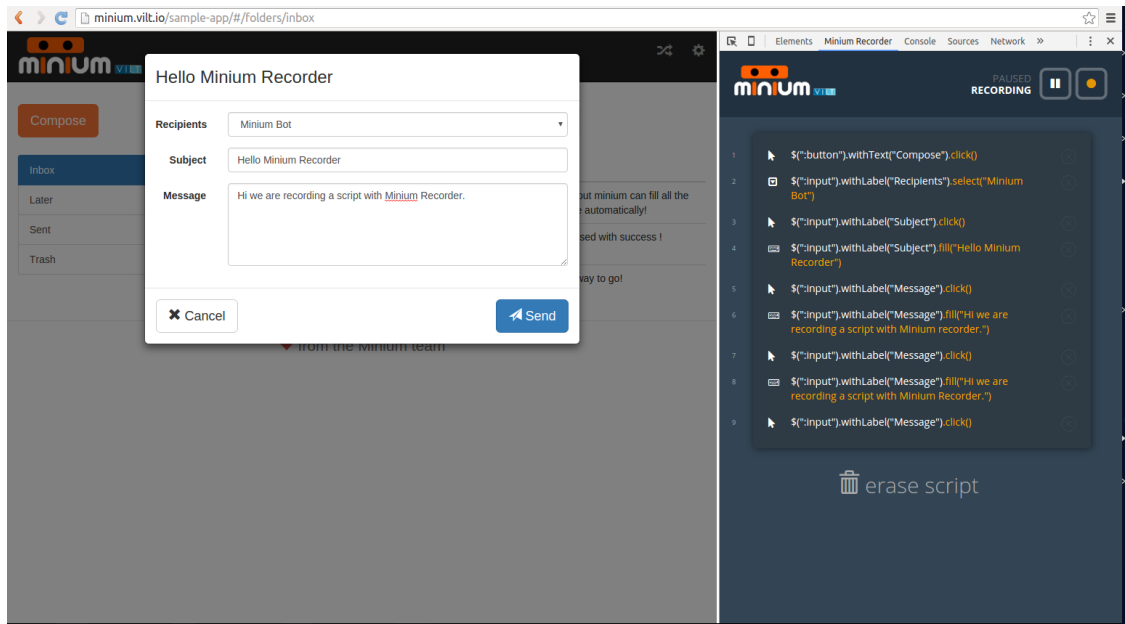


To try other expressions, click on the expression and a list of alternative expressions will be displayed:

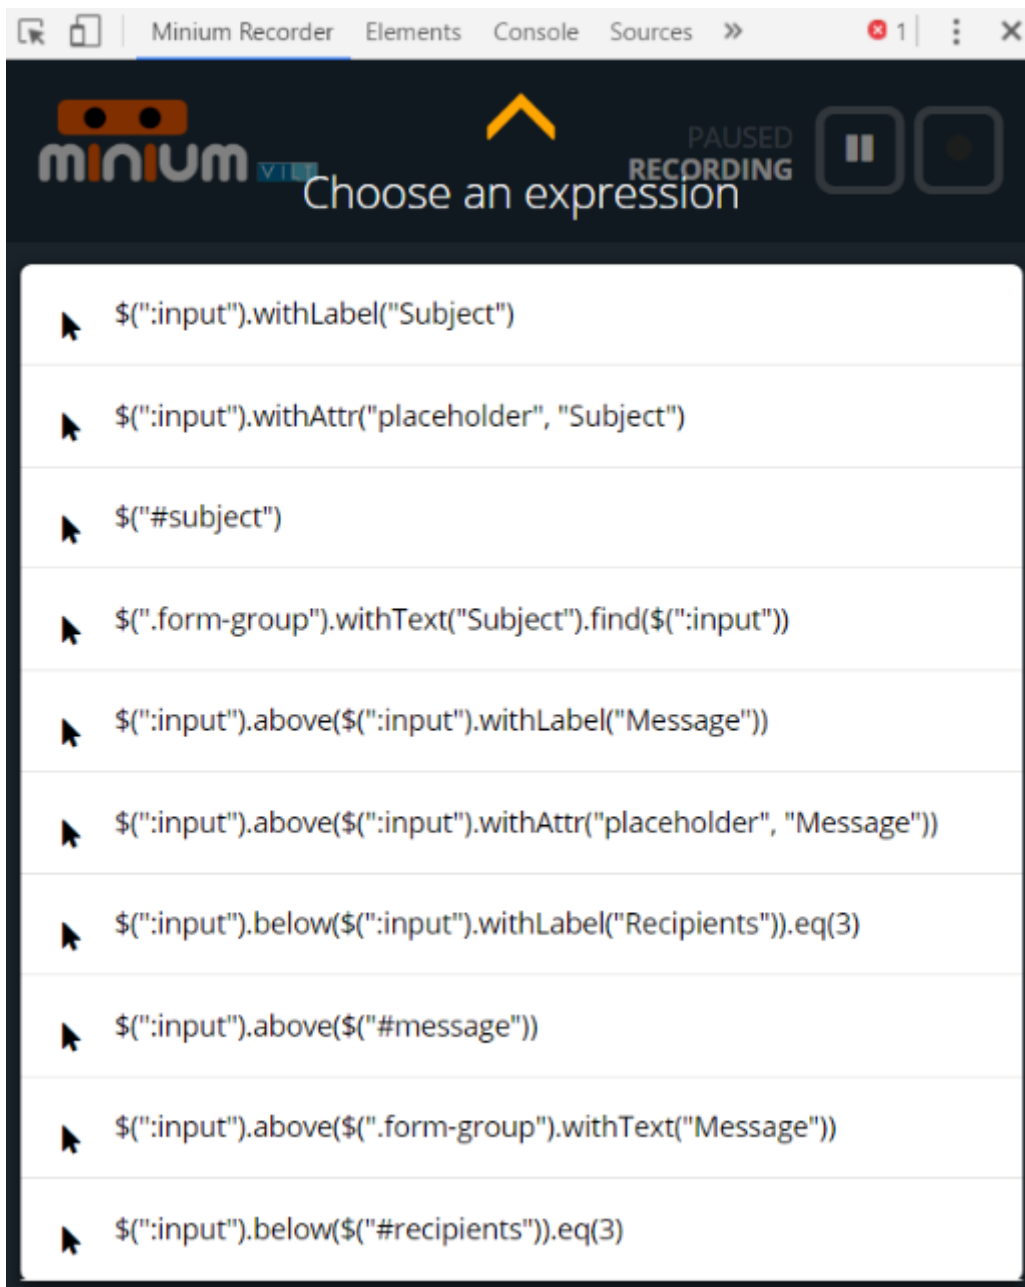

To select an expression, just click on it.

12. Stop recording

Click on the pause button to stop a recording.

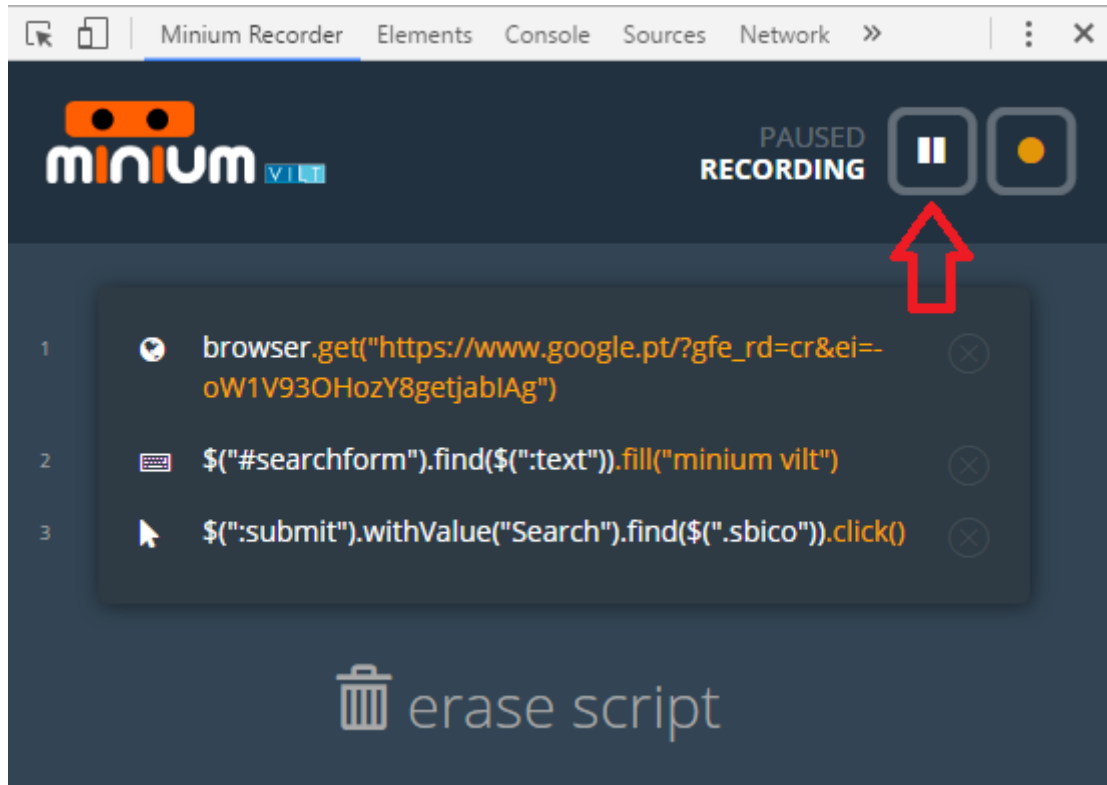

13. Import the recorded script in Minium Developer

To import a script in Minium Developer, right-click on the editor area, where is intended to put the script, and choose the option `Import recorded script`:

