



# VILT Minium Manager

## Reference documentation

Version 2.6



# Contents

<b>Summary</b>	<b>1</b>
<b>Quick start</b>	<b>2</b>
<b>1. Install and Run Minium Manager</b>	<b>3</b>
<b>2. Give it a try</b>	<b>4</b>
<b>Installation Guide</b>	<b>7</b>
<b>3. Supported Environments and Compatibility</b>	<b>8</b>
3.1. OS	8
3.2. Databases	8
3.3. Java	8
3.4. Selenium Grid	8
3.4.1. Selenium Grid - WebDrivers	9
3.5. Application Servers	9
3.6. Supported Browsers	10
<b>4. Minium Manager</b>	<b>11</b>
4.1. Minium Manager Architecture	11
4.1.1. Machine Type 1	12
4.1.2. Machine Type 2	12
4.1.3. Node Configuration - Internet Explorer	14
4.1.4. Jenkins Agent	14
4.2. System Requirements	15
<b>5. Installing Minium Manager</b>	<b>17</b>
5.1. Database Configuration	17
5.1.1. MySQL	17
5.2. Selenium Grid Configuration	18
5.2.1. Move the Hub, and the Node to another machine	18
Node Configuration	19
WebDrivers Configuration	21
Additional browser capabilities	21
5.2.2. BrowserStack	22
5.2.3. Multiple providers	23
5.3. Standalone Installation	23
5.3.1. Start Minium Manager	23
5.4. Docker Installation	24
5.4.1. Start Minium Manager	24
5.5. TestLink	26
5.6. Add Jenkins Node	27
<b>6. After Installing Minium Manager</b>	<b>29</b>
6.1. License	29
6.1.1. Obtaining a Valid License	29
6.1.2. Configuring Minium Manager License	29
6.2. Logs	29
6.2.1. Minium Manager	30

Jenkins	30
6.2.2. Selenium Grid	31
6.3. E-mail	32
6.4. LDAP	32
6.5. Videos	33
6.6. Minium version auto-update	33
6.7. Error Message (Jenkins)	34
6.8. Monitoring And Cookie	34
6.9. Executors	36
6.10. Additional WebDriver configurations	36
6.11. Lacaixa Configurations	37
6.12. Integration with HP ALM	38
6.12.1. Encrypt password	38
6.13. Update Minium Manager	39
<b>7. Troubleshooting Minium Manager</b>	<b>40</b>
<b>8. Uninstalling Minium Manager</b>	<b>43</b>
8.1. Remove Databases	43
8.2. Remove Standalone Installation Files	43
8.3. Remove Docker Installation Files	43
<b>User Guide</b>	<b>44</b>
<b>VILT Minium Manager: User Guide</b>	<b>45</b>
<b>9. Introduction</b>	<b>46</b>
<b>10. Projects</b>	<b>47</b>
10.1. Monitoring	47
10.1.1. Check if the website is ok	48
10.1.2. Do a search on the website with refresh and check how long it took to load.	49
10.1.3. Click on a link and get the performance of the page	49
10.2. Cookie	49
10.3. Setup a project	50
10.3.1. General	50
10.3.2. Browsers	53
10.3.3. Reports and Scheduling	53
10.3.4. Advanced	57
10.3.5. Runtime	58
10.3.6. API	59
10.4. Project permissions	60
10.5. Organise projects by Labels or Groups	62
10.5.1. Manage Labels	62
10.5.2. Assign labels to the projects	63
10.5.3. Manage groups	64
Manage groups using LDAP authentication	65
Manage groups without LDAP authentication	65
10.5.4. Organise Projects	67

Clean project filters . . . . .	68
Project Type . . . . .	69
Auto Refresh . . . . .	70
Filter by Results . . . . .	70
10.6. Configuration profiles . . . . .	70
10.7. Secret configuration properties . . . . .	71
10.8. Add test information to Minium Manager Report (output) . . . . .	72
10.9. Delete a project . . . . .	74
<b>11. Check the available browsers . . . . .</b>	<b>75</b>
<b>12. Project Statistics . . . . .</b>	<b>76</b>
<b>13. Test executions . . . . .</b>	<b>78</b>
13.1. Launch test executions . . . . .	78
13.1.1. Launch a test execution manually . . . . .	78
13.1.2. Schedule test executions . . . . .	80
13.1.3. REST API . . . . .	81
13.2. Follow the progress of a test execution . . . . .	84
<b>14. Monitor test results . . . . .</b>	<b>85</b>
14.1. Feature overview . . . . .	94
14.2. Reports . . . . .	95
14.3. Daily Reports . . . . .	96
14.4. Data Extraction Reports . . . . .	97
<b>15. Roles . . . . .</b>	<b>99</b>
15.1. Assign roles . . . . .	99
15.2. License information . . . . .	100
<b>Minium Recorder User Guide . . . . .</b>	<b>101</b>
<b>16. Configure Minium Developer . . . . .</b>	<b>102</b>
<b>17. Launch Minium Recorder . . . . .</b>	<b>103</b>
<b>18. Start recording . . . . .</b>	<b>105</b>
<b>19. Record interactions . . . . .</b>	<b>106</b>
<b>20. Stop recording . . . . .</b>	<b>108</b>
<b>21. Import the recorded script in Minium Developer . . . . .</b>	<b>109</b>

## Summary

This document provides a quick start guide as well as detailed instructions on how to set up and use a VILT Minium Manager 2.6 system. Usage instructions for Minium Recorder, which is exclusive to Minium Manager customers, are also included.



## Quick start

This chapter describes the quickest way to get a Minium Manager up and running. This is useful to try out Minium Manager and do not want to configure a production ready system.

## 1. Install and Run Minium Manager

To install and run Minium Manager:

1. Contact VILT and request the Minium Manager installation bundle.
2. Extract `minium-manager.zip` to a directory on a local machine.
3. Execute the script `./bin/start-minium-manager-all.(sh|bat)`
4. Minium Manager is now available at port 8080. You can access it by requesting the following URL: .


```
http://localhost:8080/
```

## 2. Give it a try

To try it, access Minium Manager:

```
http://localhost:8080/
```


- Log in at Minium Manager, and click `Create New Project`.

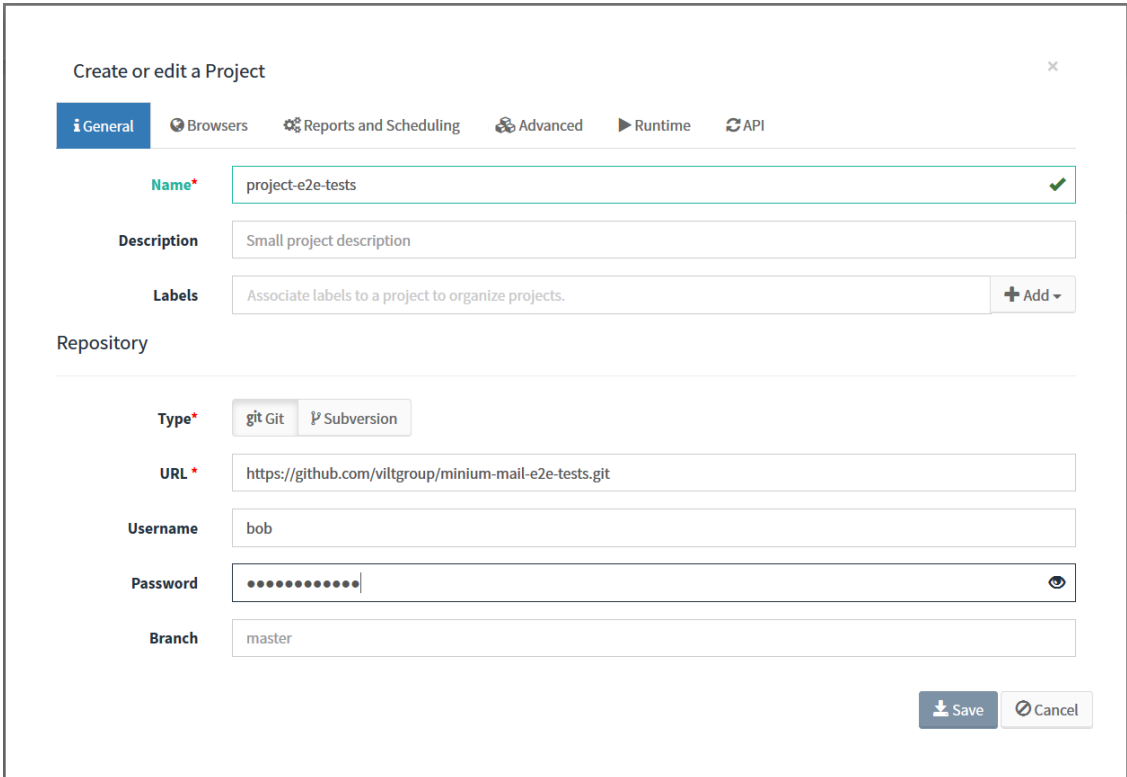

- Fill the form:

<b>Name</b>	Project name
<b>Description</b>	Description of the project
<b>Type SCM</b>	Type of SCM repository
<b>Repository Url</b>	URL of the repository where the project with the features is stored. The following are examples of valid git URLs (or a local file path):  <a href="https://github.com/github/git.git">https://github.com/github/git.git</a>  //dolos/repos/gmail-e2e-tests

- Click `Save` to create the New Project.
- In the projects list, click on `Launch test` to launch test executions of the features and choose the browsers where you want to run the features:

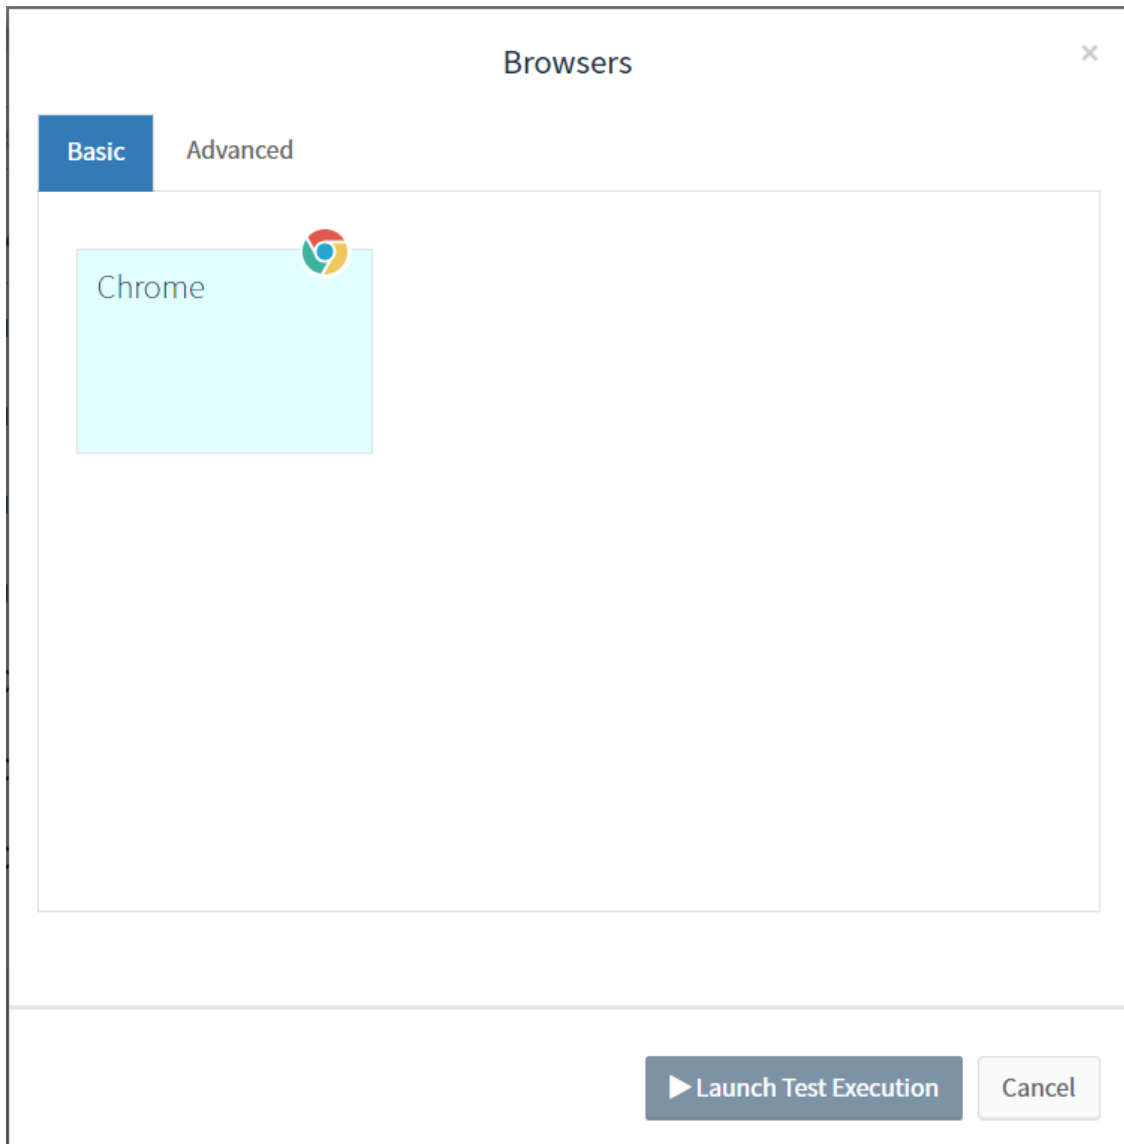

- Choose an installed browser on the machine and click `Launch Test Execution` to Start the test.
- Schedule the test execution (it the project configuration):


**Scheduler**

Never run
  Every Day
  Every Week
  Every Month
  Every Day at midnight
  Custom

**Scheduler Custom Configurations**

Every:  at  :


- Click on the project name (from the projects list) to see the status of the all launched executions:

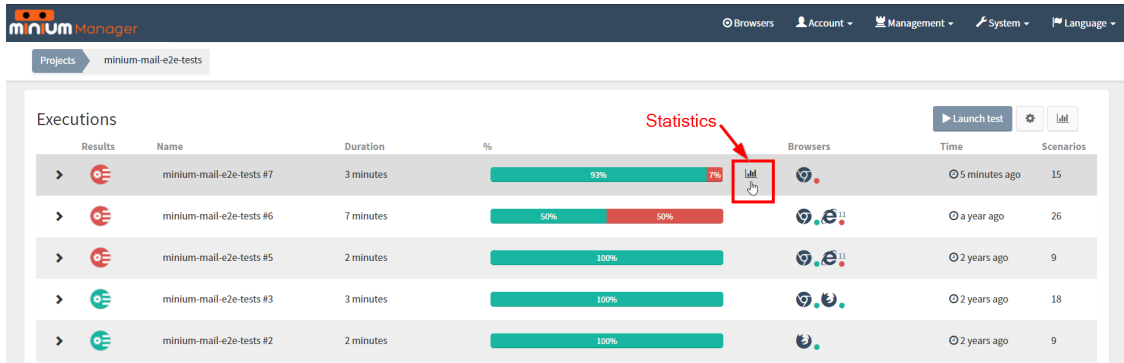

The screenshot shows the 'Executions' page in Minium Manager. A table lists several test runs. The first row is highlighted, and a red arrow points to a 'Statistics' link next to its progress bar.

Results	Name	Duration	%	Browsers	Time	Scenarios
▶	minium-mail-e2e-tests #7	3 minutes	93% <span style="color: red;">7%</span>	🌐	🕒 5 minutes ago	15
▶	minium-mail-e2e-tests #6	7 minutes	50% <span style="color: red;">50%</span>	🌐 🌐	🕒 a year ago	26
▶	minium-mail-e2e-tests #5	2 minutes	100%	🌐 🌐	🕒 2 years ago	9
▶	minium-mail-e2e-tests #3	3 minutes	100%	🌐 🌐	🕒 2 years ago	18
▶	minium-mail-e2e-tests #2	2 minutes	100%	🌐	🕒 2 years ago	9


- Click on the test execution to see the list of features executed and their results

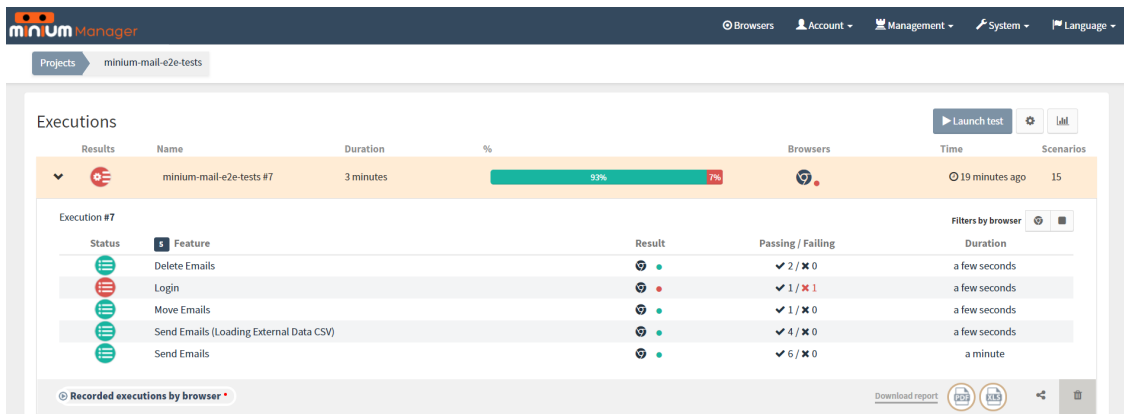

The screenshot shows the details of the selected test execution. It displays a table of features with their execution status and results.

Status	Feature	Result	Passing / Failing	Duration
🌐	Delete Emails	🌐	✓ 2 / ✗ 0	a few seconds
🌐	Login	🌐	✓ 1 / ✗ 1	a few seconds
🌐	Move Emails	🌐	✓ 1 / ✗ 0	a few seconds
🌐	Send Emails (Loading External Data CSV)	🌐	✓ 4 / ✗ 0	a few seconds
🌐	Send Emails	🌐	✓ 6 / ✗ 0	a minute

- At the feature's page, see the scenario of this particular feature. Collapse the scenario to see all the steps and their results.

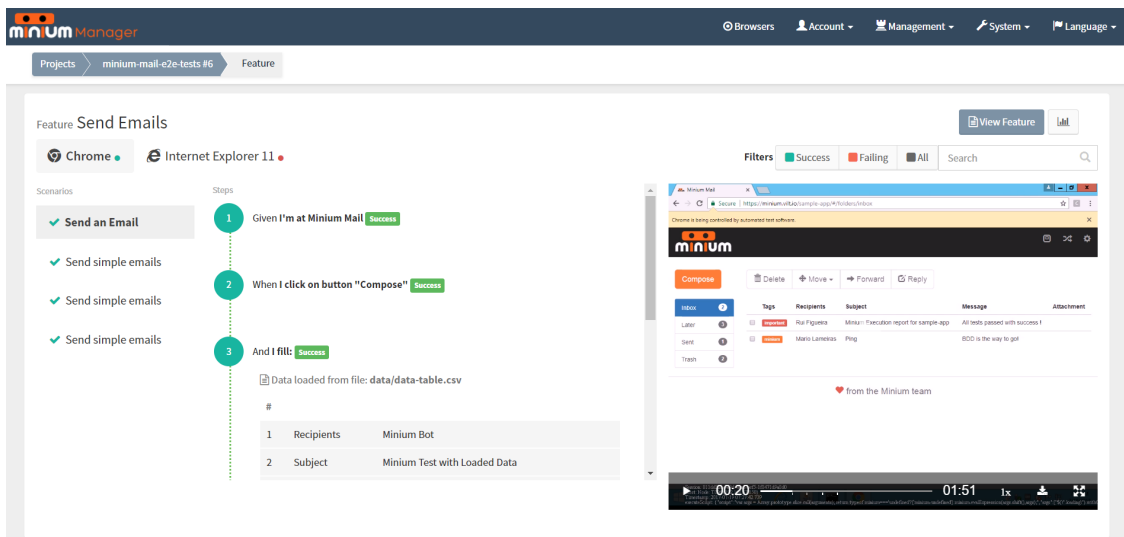

The screenshot shows the 'Feature Send Emails' page. It displays a scenario with three steps, each marked as 'Success'. A preview of the email interface is shown on the right.

**Feature Send Emails**

Scenarios:

- ✓ Send an Email
- ✓ Send simple emails
- ✓ Send simple emails
- ✓ Send simple emails

Steps:

- 1 Given I'm at Minium Mail Success
- 2 When I click on button "Compose" Success
- 3 And I fill: Success

Data loaded from file: data/data-table.csv

#	Recipients	Minium Bot
1	Recipients	Minium Bot
2	Subject	Minium Test with Loaded Data

# Installation Guide

This chapter describes the installation and configuration of Minium Manager.

## 3. Supported Environments and Compatibility

This chapter provides a reference to matrices of the Minium Manager components and configurations tested and validated.

### 3.1. OS

The following table shows Minium Manager OS support:

OS	Versions	Minium Manager
Linux	Ubuntu 16.04 LTS	✓
MS Windows	Windows 7+	✓

### 3.2. Databases

The following table shows Minium Manager database support:

Database	Versions	Minium Manager
H2	—	—
MySQL	The minimum supported MySQL version is 5.6.33 Community Server 64 bits	✓

### 3.3. Java

Minium Manager supports Java 1.8.

### 3.4. Selenium Grid

Minium Manager uses [Selenium Video Node](#) to run tests in parallel on multiple machines, and to manage different browser versions and browser configurations centrally.

The compatibility of Selenium Grid with OS are:

OS	Versions	Selenium Grid
Linux	Ubuntu 16.04 LTS	✓
MS Windows	Windows 7+	✓

About the web browsers (based on the last versions of the webdrivers), the Selenium Grid supports:

Browser	Versions	Selenium Grid
Firefox	The latest release, the previous release, the latest ESR release and the previous ESR release.	✓
MS Internet Explorer	11	✓
Chrome	Check the <a href="#">release notes</a> to see which version of the webdriver is required to the chrome version installed.	✓

You can check (in more details) the supported platforms at <https://selenium.dev/downloads/>

Other providers are also supported:

- [Selenium Grid Extras](#)
- [BrowserStack](#)

### 3.4.1. Selenium Grid - WebDrivers

If you are running the Node in a 32-bit Linux distros machine, you cannot update your Google Chrome web browser to the latest versions (Google drop support for all 32-bit Linux distros in March 2016). The last version of the Google Chrome for the 32-bit Linux distros is 48. So, to continue to perform tests with Google Chrome (version 48) in 32-bit Linux distros, you should use the version 2.21 of the chrome webdriver. For the 64-bit Linux distros, you can update the Google Chrome (64-bit) to the latest version and use the latest chrome webdriver.

About the Firefox, with the release of Firefox 47, the extension based version FirefoxDriver no longer works. If you are using Firefox 46 (or prior versions), you can continue to use the FirefoxDriver. For the Firefox 47, you need to update the Firefox to the latest version and start using use the MarionetteDriver. The other option is to downgrade your version of Firefox (preferably to the Firefox 45 ERS) and continue using the FirefoxDriver. Keep in mind that the FirefoxDriver will be discontinued.

For the Internet Explorer, it is required a MS Windows OS machine.

## 3.5. Application Servers

The following table shows which Application Servers you can use with Minium Manager system:

Application Server	Versions	Minium Manager
Apache Tomcat	8.x	✓

## 3.6. Supported Browsers

Minium Manager web application is supported by the following browsers:


1. **Chrome**
2. **Firefox**
3. **IE 9+**

## 4. Minium Manager

Minium Manager is a powerful console that provides useful reports of the ongoing projects and has a strong component in continuous integration.


### 4.1. Minium Manager Architecture

The following diagram shows the generic architecture of Minium Manager:

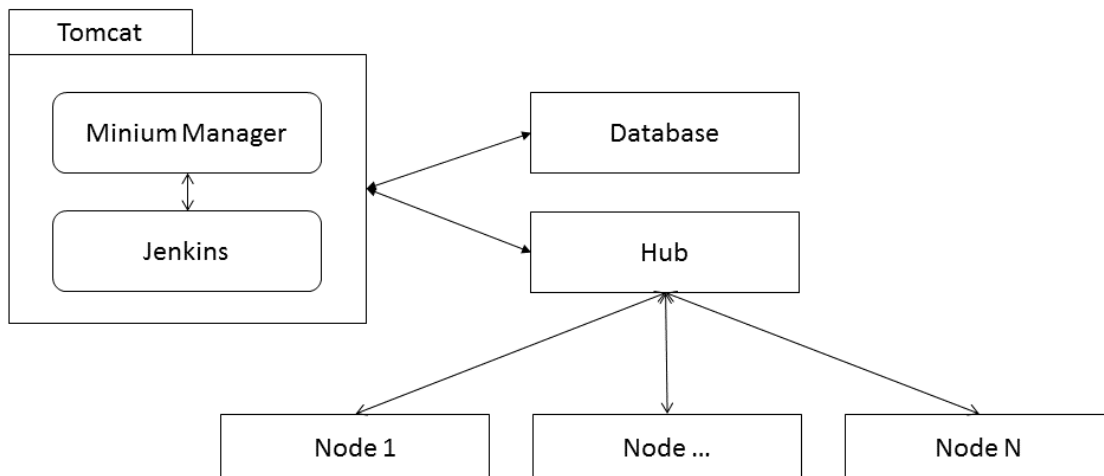

The main components of Minium Manager are Minium Manager, Jenkins for Continuous Integration in testing, Selenium Grid: one **Hub** (to monitor and manage the tests) and several **Nodes** (runs a browser to execute the tests). The number of nodes directly depends on the volume of executions and different browsers requirements for testing.

One of the standard installation for Minium Manager is:

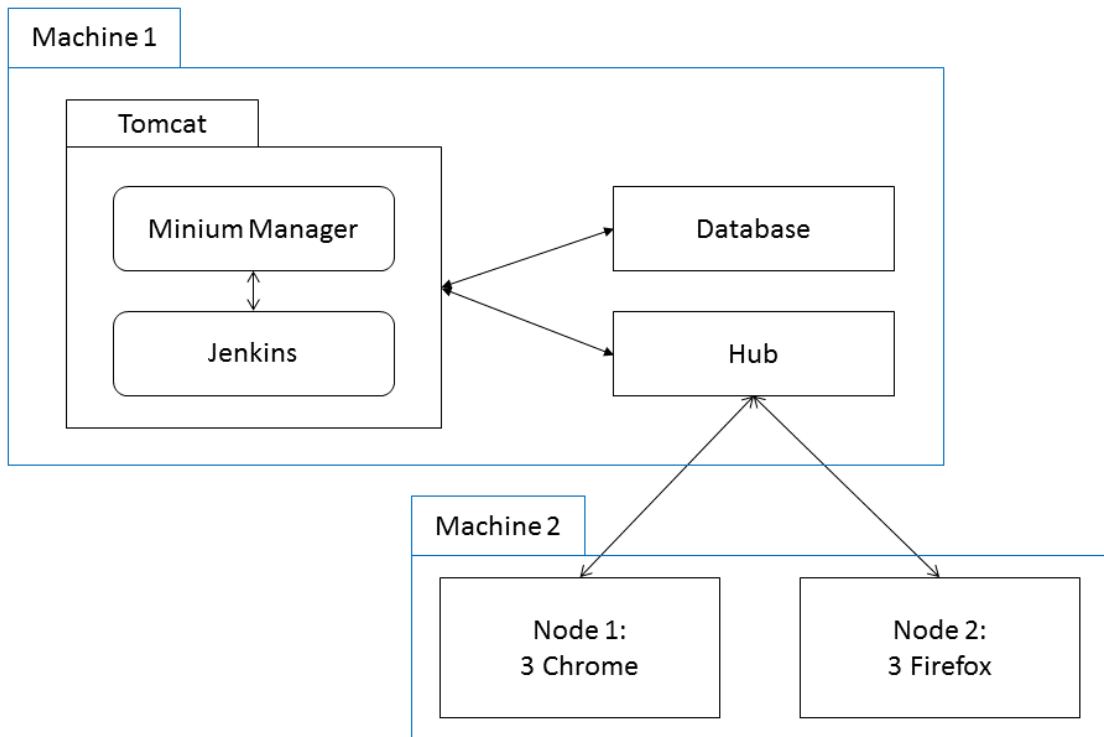

This base configuration has two machines:

- **Machine Type 1** with Minium Manager, Jenkins, MySQL and Selenium Hub installed. This is the machine that will manage the tests.
- **Machine Type 2** with two Nodes (Running Google Chrome and Firefox). This is the machine that will perform the tests. If more browsers are required, more machines of type 2 will be needed, as only 1 browser of each type can run per Operating System (The exception is running with Docker).

### 4.1.1. Machine Type 1

This machine runs Minium Manager with Jenkins providing the Manager interface, scheduling of jobs and reports. It will also run the Selenium Hub that manages the connection to all the available selenium nodes.

For easier setup and management we recommend `Docker` and `Docker Compose` to be installed on the machine. Otherwise, the following software needs to be installed.

- Java 8 with `JAVA_HOME` environment variable set
- Git and/or SVN
- MySQL 5.6

### 4.1.2. Machine Type 2

In this machine type is where the tests are executed in the Browser

The node machines are independent of the hub or the other nodes (concerning to OS or

browser selection). A single machine can have multiple nodes running, but is recommended a node (running only single type of browser) per machine. A node on MS Windows OS might have the capability of offering Internet Explorer as a browser option, whereas this wouldn't be possible on Linux or Mac.


For easier setup and management we recommend `Docker` and `Docker Compose` to be installed on the machine. It is also necessary to have video recording of simultaneous browser executions, and to have multiple instances of the same browser without the need for extra hardware.

Otherwise, if `Docker` is not installed, a node machine requires the installation of the following software:

- Java 8
- The browser(s) and its web drivers that the node will use to execute the tests (provided by the installation package)

In this configuration, it is only necessary to run the tests in Chrome and Firefox browsers.

An alternative standard installation for Minium Manager is:

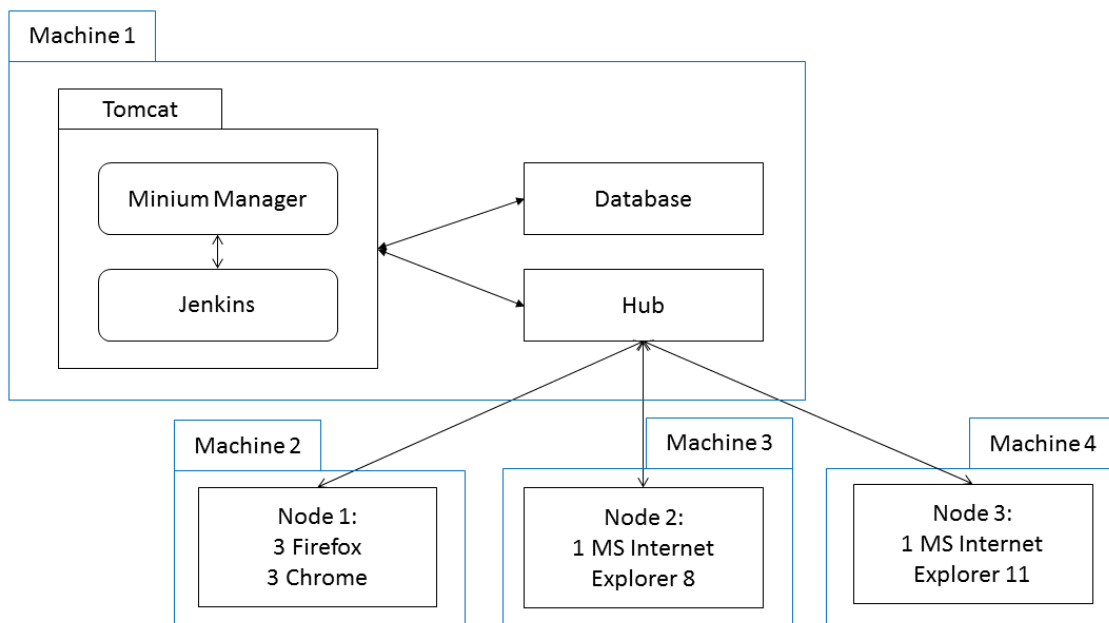

The main difference of this configuration to the first is how the Nodes are arranged. This configuration runs a Node per machine (**Machine 2**, **Machine 3** and **Machine 4**). The **Machine 3** and **Machine 4** was MS Windows OS. This installation will run the tests in parallel.

Alternatively, run the Hub in a different machine.



**NOTE:**

A different machine is required for each Internet Explorer version.

### 4.1.3. Node Configuration - Internet Explorer

To configure a node with MS Internet Explorer the following configuration is required:

- On IE 7 or higher on Windows Vista or Windows 7, set the Protected Mode settings for each zone to be the same value. The value can be on or off, as long as it is the same for every zone. To set the Protected Mode settings, choose "Internet Options..." from the Tools menu, and click on the Security tab. For each zone, there will be a checkbox at the bottom of the tab labeled "Enable Protected Mode".
- Additionally, "Enhanced Protected Mode" must be disabled for IE 10 and higher. This option is found in the Advanced tab of the Internet Options dialog.
- The browser zoom level must be set to 100% so that the native mouse events can be set to the correct coordinates.
- For IE 11 only, it will need to set a registry entry on the target computer so that the driver can maintain a connection to the instance of Internet Explorer it creates. For 32-bit Windows installations, the key to examine in the registry editor is `HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Internet Explorer\Main\FeatureControl\FEATURE_BFCACHE`. For 64-bit Windows installations, the key is `HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\Microsoft\Internet Explorer\Main\FeatureControl\FEATURE_BFCACHE`. Please note that the `FEATURE_BFCACHE` sub-key may or may not be present, and should be created if it is not present.

**Important:**

Inside this key, create a DWORD value named `iexplore.exe` with the value of 0.

Check the rest of the configurations at the following website: <https://github.com/SeleniumHQ/selenium/wiki/InternetExplorerDriver#required-configuration>

### 4.1.4. Jenkins Agent

This machine runs a Jenkins Agent that executes Minium Projects.

To be able to connect to the SCM repositories, build the projects and launch the Minium Projects, it is required that this machine has installed the following software:

- Java 8
- Git and/or SVN
- Maven
- Google Chrome, and it's webdriver
- NodeJs (Required for the Cookie projects)

Also, it is required to download the `agent.jar` to be able to connect to the Jenkins. To download the archive jar, access the link `<jenkins_ulr>/jnlpJars/agent.jar`.

## 4.2. System Requirements

Minium Manager minimum requirements are:

### Hard-Drive:

- Machine Type 1: 100Gb
- Machine Type 2: 100Gb



Setting up daily backups is recommended for the entire Hard Drive.



Disk space will be related to the type of usage and how tests are created in Minium: Screenshots taken per test, frequency of execution, Videos stored and history saved for each project.

### Memory:

- Machine Type 1: 12Gb
- Machine Type 2: 8Gb (Minium for 2 browsers)

### CPU:

- Machine Type 1: 4 CPUs @ 2Ghz
- Machine Type 2: 4 CPUs @ 2Ghz

### Other Requirements:

- JAVA 8
- Internet Connection

If the server machine is a LINUX system with no graphical interface. You will need to install the following packages:

- xvfb
- xfonts-75dpi
- fontconfig
- libjpeg62-turbo
- libxrender1

### Offline Server workaround:



Nodes without internet connection will be very limited in testing websites as CDN and external resources are often used and thus it is not recommended.

- **RPM packages for LINUX systems:**

If the server machine does not have Internet access, the RPM packages can be provided for

RedHat family systems, then follow the steps below:

- Extract the packages into the server machine
- Go to the folder where the packages were extracted
- rpm -Uvh \*.rpm
  - **Maven Repository:**

Local repository maven to execute the project will also be provided, then follow the steps below:

- Extract the folder into the default location of repository maven (`${user.home}/.m2/repository`)

## 5. Installing Minium Manager

This chapter describes how to install Minium Manager in a standalone application or run the docker images with Minium Manager.

To install (as standalone):

- Contact VILT and request the Minium Manager installation bundle.
- Extract `minium-manager.zip` to a directory of your choice.

### 5.1. Database Configuration

By default, Minium Manager uses an **H2** database, but a **MySQL** database is recommended.

Before proceeding, it is necessary to create the database named `minium`.

#### Note:



Be free to give another name to the database. After, it is necessary to set the database name in the endpoint of the database connection at the application server.

#### 5.1.1. MySQL

The Minium Manager supported MySQL 5.6 Community Edition.

To define the new configuration of the **MySQL** edit the file `$(MINIUM_MANAGER_HOME)/config/application-prod.yml`, in order to replace the `<dbhost>`, `<username>` and `<password>`:

```
spring:
  datasource:
    driver-class-name: com.mysql.jdbc.jdbc2.optional.MysqlDataSource
    url: jdbc:mysql://<dbhost>/minium
    username: <username>
    password: <password>
  jpa:
    database-platform: org.hibernate.dialect.MySQLInnoDBDialect
    database: MYSQL
```

It is also recommend increasing the buffer pool size and max allowed packet of MySQL to avoid future problems when the amount of data stored on the database increases (see **Minium Manager is slow** on the section [Troubleshooting Minium Manager](#)). Example:

```
max_allowed_packet=1000000000
innodb_log_file_size=1024M
innodb_buffer_pool_size=1G
```

## 5.2. Selenium Grid Configuration

Minium Manager uses **Selenium Grid** to provide an easy way to run tests in parallel on multiple machines and manage different browser versions and browser configurations centrally.

The default configuration run the **Hub**, and the **Node** in the same machine as Minium Manager, but it can choose to run the **Hub** and the **Node** on another machine or use the [browserstack](#) as provider to run the tests.

### 5.2.1. Move the Hub, and the Node to another machine

If choose to run the **Hub** on another machine, copy the `./selenium` folder to the new machine and configure the new endpoint.

Inside this folder (`./selenium`), will find two folders: `hub` and `node`.

The `hub` folder contains a configuration to run the **Hub** (see below).

The `node` folder contains two folders with configurations to run the **Node** in a MS Windows and in a Linux OS machine:

- The `win` folder contains a configuration to run the **Node** in a MS Windows OS machine. In this configuration (`./selenium/node/win/node_5555.json` file), it is configured 1 instances of firefox, 1 instances of chrome and 1 instance of internet explorer (version 11).
- The `linux` folder contains a configuration to run the **Node** in a Linux OS machine (default configuration). In this configuration (`./selenium/node/linux/node_5555.json` file), it is configured 1 instances of firefox and 1 instances of chrome.

It is necessary to add/update the Minium Manager configuration (replace `<selenium_host>` at the `./config/application-prod.yml` file) in order to set the new provider:

```
minium:
  manager:
    providers:
      - type: selenium-video-node
        selenium-grid-url: <selenium_host>
```

After this launch the **Hub** from another machine with `./bin/start-selenium-hub.(sh|bat)` script (from the `./selenium/hub` copied folder):

#### Note:



The new machine must have the java installed and configured (i.e. the `JAVA_HOME` environment variable).

It is possible to choose a different port (default: 4444), to do this edit the `hub_4444.json` (at the `./selenium/hub` copied folder) before launching the **Hub**, to replace the port property.

At the `./selenium/hub` folder find the `hub_4444.json` file with the following properties:

Property	Type (Default Value)	Description
port	Integer (4444)	The port that <b>Hub</b> will use (explained above).
newSessionWaitTimeout	Integer (-1)	The time (in milliseconds) after which a new test waiting for a node to become available will time out. When that happens, the test will throw an exception before starting a browser.
throwOnCapabilityNotPresent	Boolean (true)	If true, the hub will reject test requests right away if no proxy is currently registered that can host that capability. Set it to false to have the request queued until a node supporting the capability is added to the grid.
nodePolling	Integer	Interval (in milliseconds) between alive checks of node how often the hub. Checks if the node is still alive.
cleanUpCycle	Integer	How often (in milliseconds) a proxy will check for timed out thread.
browserTimeout	Integer	The timeout (in milliseconds) a browser can hang.
timeout	Integer	The timeout (in milliseconds) before the hub automatically ends a test that hasn't had any activity in the last X seconds. The browser will be released for another test to use. This typically takes care of the client crashes.
maxSession	Integer (5)	The max number of tests that can run at the same time on the nodes, independently of the browser used.

## Node Configuration


The default configuration run one **Node** in the same machine as Minium Manager.

In order to run instances of the **Node** on another machine, copy the `./selenium` folder to the new machine and configure the endpoint to **Hub**. It is required that the new machine have java installed.

To define the endpoint of the **Hub**, edit the **Node** configuration (on the new machine) at `./selenium/node/(linux|win)/node_5555.json` file, to replace `<machine_ip>` (the `host/"ip address"` of the new machine), `<hub_host>` (the `host/"ip address"` of the Hub) and `<hub_port>` (the port used by the Hub):

```
{
  ... ,
  "configuration": {
    ... ,
    "host": "<machine_ip>",
    ...
    "hubHost": <hub_host>,
    "hubPort": "<hub_port>",
    ...
  }
}
```

Launch the **Node** from another machine with `./bin/start-selenium-node.(sh|bat)` script (from the `./selenium/node/(linux|win)` copied folder):

 **Note:**  
Before start any **Node** instance, make sure the **Hub** instance is started.

 **Note:**  
Be free to change this configuration, but before apply the changes, stop the **Node**, update the `node_5555.json` file, and launch the **Node** again.

At the capabilities section (in the `node_5555.json` file) we can set the browser(s) for the tests:

Property	Type	Description
browserName	String	The name of the browser being used; this value should be one of {android chrome firefox htmlunit internetexplorer iPhone iPad opera safari}.
version	String	The browser version, or the empty string if unknown.

Property	Type	Description
platform	String	A key specifying which platform the browser should be running on. This value should be one of {WINDOWS XP VISTA MAC LINUX UNIX ANDROID}. When requesting a new session, the client may specify <code>ANY</code> to indicate any available platform may be used.
maxInstances	Integer	Maximum number of instances to allow to connect to grid.

Check the rest of the properties at the following website: <https://raw.githubusercontent.com/SeleniumHQ/selenium/DesiredCapabilities.md>

## WebDrivers Configuration

If you want to update the webdrivers at the **Node**, due the incompatibility with the web browser version (check [Selenium Grid - WebDrivers](#) to see more about the compatibility), you need to download the newer versions of the webdrivers at <http://docs.seleniumhq.org/download/> and copy the webdrivers file to the folder `./selenium/node/(linux|win)/drivers`. Check if the name of the webdriver file match the name defined at the script `./selenium/node/(linux|win)/start-selenium-node.(sh|bat)`.

## Additional browser capabilities

By default, the selection of the browsers on which the tests will run is as simple as possible, by only taking into account their names. In case more specificity is needed, additional browser capabilities can be configured. If any of those capabilities is not `browserName`, `version`, `platform` or `applicationName`, start by making sure that:

- The `minium-grid.extensions.jar` file is on the `selenium` folder.
- The property `hub_additional_classpath` on the `selenium/hub/selenium-grid-extras_config.json` file includes the value `minium-grid-extensions.jar`.
- The property `capabilityMatcher` on the `selenium/hub/hub_4444.json` file is set to `minium.manager.grid.MiniumCapabilityMatcher`.

After setting up the hub, add the capabilities to the JSON configuration files of the nodes (e.g., `node_5555.json`). Example containing the version, platform and environment of each browser:

```
{
  "capabilities": [
    {
      "browserName": "chrome",
      "maxInstances": 1,
      "version": "62",
      "platform": "Windows",
      "environment": "Development"
    },
    {
      "browserName": "firefox",
      "maxInstances": 1,
      "version": "56",
      "platform": "Windows",
      "environment": "Development"
    }
  ]
}
```

Note that the names of the capabilities are in camel case (`browserName`, `applicationName`, etc.).

Lastly, add the capability names to the `config/application-prod.yml` file, so that they will be considered and displayed on the user interface:

```
minium:
  manager:
    webdrivers:
      capabilities-to-consider:
        - version
        - platform
        - environment
```

## 5.2.2. BrowserStack

To run the tests through browserstack as provider is necessary to update the default configuration.

First disable the default configuration in order to set the new provider. So, edit the `./config/application-prod.yml` file to uncomment the `minium.manager.providers.browserstack-username`, and the `minium.manager.providers.browserstack-access-key` (remove the `#`), set the `minium.manager.providers.type` with the `browserstack` value and replace `<browserstack_username>` and `<browserstack_access_key>`:

```
minium:
  manager:
    providers:
      - type: browserstack
        browserstack-username: <browserstack_username>
        browserstack-access-key: <browserstack_access_key>
```

The `minium.manager.providers.type` property value should be one of:



- `*selenium-video-node*`: for a local Selenium Grid configuration (it also requires the configuration of the `minium.manager.providers.selenium-grid-url` property).
- `*selenium-grid-extras*`: for a local Selenium Grid configuration (it also requires the configuration of the `minium.manager.providers.selenium-grid-url` property).
- `*browserstack*`: to use the browserstack as provider (it also requires the configuration of `minium.manager.providers.browserstack-username` and `minium.manager.providers.browserstack-access-key` properties).

### 5.2.3. Multiple providers

Minium Manager also supports the configuration of multiple providers.

To add multiple providers, edit the Minium Manager configuration (replace the placeholders, explained above, and the `<provider_label>` at the `./config/application-prod.yml` file) in order to set the list of providers:

```
minium:
  manager:
    providers:
      - label: <provider_label> (e.g: Selenium Video Node)
        type: selenium-video-node
        selenium-grid-url: <selenium_host>
      - label: <provider_label> (e.g: BrowserStack)
        type: browserstack
        browserstack-username: <browserstack_username>
        browserstack-access-key: <browserstack_access_key>
      - label: ...
      ...
```

The `provider_label` configuration must be a unique value and will define the name of the provider that will be displayed at the Minium Manager interface.

After the configuration of multiple providers, restart Minium Manager, to be able to launch the tests in different providers.

## 5.3. Standalone Installation

The quickest way to start using Minium Manager is to launch it as a standalone application.

### 5.3.1. Start Minium Manager

Minium Manager is launched by running the script `./bin/start-minium-manager-all.(sh|bat)`.

**Note:**



Minium Manager is launched with 1024M of heap size. To increase the heap size, you must edit the `JAVA_OPTS` environment variable at `./tomcat/bin/setenv.(sh|bat)`.

Change the default configuration (e.g. run **Selenium Grid** and/or **Selenium Node** in another host), then launch the **Selenium Grid** and/or **Selenium Node** from the different hosts (see [Selenium Grid Configuration](#)). After this run the script `./bin/start-minium-manager.(sh|bat)` to start Minium Manager.

To start the **Selenium Grid** and **Selenium Node** from another host, check [Selenium Grid Configuration](#).

After Minium Manager is started, and if the default configuration is used, it is ready to use and available at `http://<hostname>:8080/`

## 5.4. Docker Installation

An Alternative way to start using Minium Manager is through a docker container.

To run Minium Manager with docker, it is required have docker installed, docker compose too and a machine with Linux.

To install:

1. Contact VILT and request the Minium Manager installation bundle.
2. Extract `minium-manager.zip` to a directory on the local machine.

### 5.4.1. Start Minium Manager

Minium Manager can be started by executing the following commands:

1. Navigate to the directory created by the extraction of the installation bundle `minium-manager.zip`.
2. Create the `docker-compose.yml` file (e.g):

```
version: '3.7'
services:
  minium-manager:
    container_name: minium-manager
    restart: unless-stopped
    image: bia.vilt-group.com/engineering/minium/minium-manager:{oem-product-version}
    hostname: minium
    volumes:
      - jenkins-data:/opt/minium/data/jenkins
      - videos:/opt/minium/data/videos
      - mysql-conf:/opt/minium/config/mysql/
      - selenium-video-lib:/opt/minium/selenium-libs/
      - m2-repo:/opt/minium/tools/maven-repository/
      - ./config/application-
docker.yml:/opt/minium/config/application-docker.yml
```

```
-
./config/license/key.license:/opt/minium/config/license/key.license
  environment:
    - JAVA_OPTS=-Xms4G -Xmx4G -Dspring.profiles.active=prod,docker
    - MINIMUM_MYSQL_URL=jdbc:mysql://mysql:3306/minium
  jenkins-agent:
    restart: unless-stopped
    image: bia.vilt-group.com/engineering/minium/minium-manager-
bundle-base/minium-jenkins-agent:1.2.13
    volumes:
      - ./tools/lib/minium-core-
extensions.jar:/opt/minium/lib/minium-core-extensions.jar
      - ./tools/crawler/cookie-
exporter.js:/opt/minium/crawler_dependencies/lib/node_modules/headless-
chrome-crawler/exporter/cookie-exporter.js
      - /dev/shm:/dev/shm
      - type: volume
        source: m2-repo
        target: /root/.m2/repository
        read_only: true
        volume:
          nocopy: true
    environment:
      - MINIMUM_COOKIES_CLASSPATH=/opt/minium/lib/minium-core-
extensions.jar:target/test-project.jar
      - JENKINS_URL=http://minium-manager:8080/jenkins/
      - JENKINS_SECRET=<secret>
      - JENKINS_AGENT_NAME=monitoring
  mysql:
    container_name: minium-mysql
    restart: unless-stopped
    image: mysql:5.6
    ports:
      - "3306:3306"
    volumes:
      - mysql-conf:/etc/mysql/conf.d/minium.cnf
      - mysql-data:/var/lib/mysql
    environment:
      - MYSQL_DATABASE=<database>
      - MYSQL_ROOT_PASSWORD=<password>
  firefox:
    image: selenium/node-firefox:3.141
    restart: unless-stopped
    volumes:
      - /dev/shm:/dev/shm
      - type: volume
        source: selenium-video-lib
        target: /opt/minium/lib
        read_only: true
        volume:
          nocopy: true
    depends_on:
      - hub
    environment:
      HUB_HOST: hub
      SE_OPTS: '-servlets
com.aimmac23.node.servlet.VideoRecordingControlServlet -proxy
com.aimmac23.hub.proxy.VideoProxy'
      JAVA_CLASSPATH: '/opt/minium/lib/*:/opt/selenium/*:.'
      JAVA_OPTS: '-Dvideo.source=X11 -Dvideo.framerate=8
-Djavax.accessibility.assistive_technologies='
  chrome:
    image: selenium/node-chrome:3.141
    restart: unless-stopped
    volumes:
      - /dev/shm:/dev/shm
      - type: volume
        source: selenium-video-lib
        target: /opt/minium/lib
```

```
        read_only: true
        volume:
            nocopy: true
    depends_on:
        - hub
    environment:
        HUB_HOST: hub
        SE_OPTS: '-servlets
com.aimmac23.node.servlet.VideoRecordingControlServlet -proxy
com.aimmac23.hub.proxy.VideoProxy'
        JAVA_CLASSPATH: '/opt/minium/lib/*:/opt/selenium/*:.'
        JAVA_OPTS: '-Dvideo.source=X11 -Dvideo.framerate=8
-Djavax.accessibility.assistive_technologies='
    hub:
        image: selenium/hub:3.141
        ports:
            - "4444:4444"
        volumes:
            - videos:/opt/selenium/videos
            - type: volume
              source: selenium-video-lib
              target: /opt/minium/lib
              read_only: true
              volume:
                  nocopy: true
        environment:
            JAVA_CLASSPATH: '/opt/minium/lib/*:/opt/selenium/*:.'
            SE_OPTS: '-servlets
minium.manager.grid.servlets.ListNodesServlet,com.aimmac23.hub.servlet.Hub
VideoDownloadServlet,com.aimmac23.hub.servlet.HubVideoInfoServlet'
            JAVA_OPTS: '-
Dvideo.storage=com.aimmac23.hub.videostorage.LocalFileVideoStore
-Dvideo.path=/opt/selenium/videos
-Djavax.accessibility.assistive_technologies='
    volumes:
        videos:
            selenium-video-lib:
            mysql-data:
            mysql-conf:
            jenkins-data:
            m2-repo:
```

1. Run the Minium Manager image, with the following command:

```
docker-compose up -d &
```



**Note:**

To configure Minium Manager (i.e. Database connection, Selenium, ...), check the [Installing Minium Manager](#) section.

## 5.5. TestLink

Minium Manager can be configured to export test results to TestLink. To configure the integration with TestLink, start by making sure the TestLink Plugin is installed on Jenkins. After that, go to `Manage Jenkins > Configure System` and configure the URL of TestLink, and a developer key with permissions to create builds on all the desired projects:

Jenkins > configuration

**TestLink**

TestLink Installation

Name	<input type="text" value="(Default)"/>
URL	<input type="text" value="http://host:port/testlink/lib/api/xmlrpc.php"/> <a href="#">?</a>
Developer Key	<input type="text" value="925c9e78da8c2adfa8e4f562d5e8cfb4"/>

Then, open the `config/application.yml` and add the `TestLink` value to the `minium.manager.modules` property:

```
minium:
  manager:
    modules:
      - TestLink
```

To log the batch update requests, configure the following logging levels:

```
logging:
  level:
    # logs the user who performed the request
    minium.manager.web.rest.TestLinkResource: INFO
    # logs the number of projects being updated
    minium.manager.service.TestLinkService: INFO
```

## 5.6. Add Jenkins Node

Minium Manager supports new types of project: the monitoring project that are executed with high frequency (every 5, 10, 20 minutes), and can give us a report about the availability of a certain page and performance metrics, with the objective to check that the page are working as expected and Cookie Project that is two custom Minium Projects that generates a report with all browser cookies found during the navigation or crawl of a website.

Before configuring this new project type, first configure jenkins to add a new agent:

To add a new agent:

1. Go to `Manage Jenkins > Manage Nodes > New Node`.
2. Set the Node name field (store the node name), select `Permanent Agent` and click `Ok`.
3. Configure the # of executors (e.g. 5), the Remote root directory (at the Jenkins Agent machine, e.g. `/tmp`) and click `Save`.
4. Open the new node menu (`<jenkins_url>/computer/<node_name>/`) and copy command to start the new Agent.
5. Launch the Jenkins Agent (by executing the command previously retrieved) and check if the Agent is connected.



**Important:**

Check the [Jenkins Agent](#) to see the requirements of a new node.

## 6. After Installing Minium Manager

Minium Manager allows tweaking configurations such as follows:

### 6.1. License

This chapter describes the procedure to gather all the information required to produce a valid license and how to set up the installation with a license. Minium Manager allows configuring Projects without a license but do not allow running tests without a valid license in place.

The license has a limit of executions per month. Each month, the execution number will reset. An alert will be shown in Minium Manager when the number of executions gets close to the limit.

As an example, if exists a project with 10 features and each feature have 5 scenarios, when an execution is launched in one browser it will consider 50 scenarios executed at the end of the execution. If launch the execution in 2 browsers, it will count 100 scenarios (2 x 50 scenarios) executed.

#### 6.1.1. Obtaining a Valid License

Request a license form VILT and attach the company name.

#### 6.1.2. Configuring Minium Manager License

With a valid license it only needs to add its contents to the file `./config/license/key.license` and restart Minium Manager. After this should be able to run tests normally.

To configure the Minium Manager license, edit the `./config/application-prod.yml` file in order to set the `minium.manager.license.client-name` and `minium.manager.license.scenarios-alert-notification` in order to replace the `<client_name>` (the name of the client), and the `<number_of_scenarios>` (the number of scenarios executed before launch a notification) values.

```
minium:
  manager:
    license:
      client-name: <client_name>
      scenarios-alert-notification: <number_of_scenarios>
```

### 6.2. Logs

This chapter describes how to manage the logging of the several components of Minium Manager.

## 6.2.1. Minium Manager

By default, Minium Manager writes logs to `./logs/minium.log`. Change easily the following properties in `application-prod.yml` to tweak the logs:

Property	Description	Default Value
<code>logging.level.root</code>	Default logging level for all classes	INFO
<code>logging.level.fullyqualifiedname</code>	Specify log level for specific packages by replacing <i>fullyqualifiedname</i> with the full class name. For example: <code>org.springframework</code>	<code>INFO</code>

Next an example of a possible logging configuration:

```
logging:
  file: ${minium.manager.home}/logs/minium.log ①
  level:
    org.springframework: WARN ②
    minium.manager: DEBUG ②
```

① Path where minium manager will write the log file

② Add or remove keys to suit the needs

### Note:



The properties `logging.level.root` and `logging.level.fullyqualifiedname` can be set with one of the following values: ERROR, WARN, INFO, DEBUG or TRACE.

To stop the minium manager logging for the `./logs/minium.log` file, please comment the line `file: ${minium.manager.home}/logs/minium.log` the logging configuration (Add the hash sign `"#"` at the beginning of the line) at the `application-prod.yml` file and the restart the tomcat. The minium manager logging will start to be written at the `./logs/catalina.<date>.log`.

## Jenkins

If you intend to separate the jenkins file in a new file, you can create the file `./tomcat/webapps/jenkins/WEB-INF/classes/logging.properties` with the content:

```
handlers = org.apache.juli.AsyncFileHandler

org.apache.juli.AsyncFileHandler.level = FINE
org.apache.juli.AsyncFileHandler.directory = ${minium.manager.home}/logs
org.apache.juli.AsyncFileHandler.prefix = ${classloader.webappName}.
org.apache.juli.AsyncFileHandler.maxDays = 3
```

**Note:**

The path `./tomcat/webapps/jenkins/WEB-INF/classes/` will be generated after the tomcat starts for the first time, and the file `./tomcat/webapps/jenkins.war` be deployed.

After the tomcat is restarted, the jenkins logging will start to be written at the `./logs/jenkins.<date>.log`.

Find more information at [https://tomcat.apache.org/tomcat-8.5-doc/logging.html#Using\\_java.util.logging\\_\(default\)](https://tomcat.apache.org/tomcat-8.5-doc/logging.html#Using_java.util.logging_(default))

## 6.2.2. Selenium Grid

To enable the logging of the selenium grid, you must edit several files before launching the selenium grid:

- **Hub:** open the file `./selenium/hub/start-selenium-hub.(sh|bat)` and add the `-log selenium.log` as java option.
- **Node:** open the file `./selenium/node/(linux|win)/start-selenium-node.(sh|bat)` and add the `-log selenium.log` as java option.

When launching Selenium server with the `-log` option, the server can record valuable debugging information reported by the Selenium Server to a text file (named `selenium.log`) stored at the `./selenium/hub/` for the **Hub** and `./selenium/node/(linux|win)/` for the **Node**.

The `<level>` can be replaced with:

- **OFF:** Turns off logging.
- **SEVERE:** Messages about things that went wrong. For instance, an unknown command.
- **WARNING:** Messages about things that may be wrong but was handled. For instance, a handled exception.
- **INFO:** Messages of an informative nature. For instance, information about received commands.
- **DEBUG:** Messages for debugging. For instance, information about the state of the driver.
- **ALL:** All log messages. A way to collect all information regardless of which log levels that are supported.

Find more information at <https://github.com/SeleniumHQ/selenium/wiki/Logging>.

## 6.3. E-mail

Configure e-mail reports for Minium Manager executions. This way, the execution's status can be sent by e-mail, which is specially handy for large tests.

Before defining the e-mail recipients on the project configuration, configure the e-mail server.

To configure the e-mail gather the following properties:

- **Protocol:** The protocol used by the email server
- **Hostname:** The email server hostname
- **Port:** The email server port number
- **Username:** The login user of the server
- **Password:** The login password of the server
- **From:** The e-mail field `from`

This configuration is done on `./config/application-prod.yml` as follows:

```
spring:
  mail:
    protocol: smtp
    host: mail.example.com
    port: 25
    user: SomeUser
    password: SomePassword
    tls: false
    auth: false
    from: minium@example.com
```

## 6.4. LDAP

To use LDAP authentication, set the following properties in the `config/application-prod.yml` file:

- **URLs:** The URLs of the LDAP servers.
- **Username:** DN of a binding user.
- **Password:** Password of the binding user.
- **Base:** Base suffixes from which all operations should originate.
- **User search base:** The search base for user searches.
- **User search filter:** The filter used to search for users, where `{0}` will get replaced by the user's login name.
- **Group search base:** The search base for group membership searches.
- **Group search filter:** The filter used to search for group membership, where `{0}` will get replaced by the DN of the user.

- **Group name attribute:** The attribute that contains the name of the group.
- **Admin:** The login name of the initial administrator.

Here is an example:

```
spring:
  ldap:
    urls:
      - ldap://myserver1:389
      - ldap://myserver2:389
    username: uid=admin,dc=example,dc=com
    password: secret
    base: dc=example,dc=com
    base-environment:
      user-search-base: ou=users
      user-search-filter: uid={0}
      group-search-base: ou=groups
      group-search-filter: uniqueMember={0}
      group-name-attribute: cn
    admin: an.admin.user
```

## 6.5. Videos

To record the tests and present the videos at executions and features pages, set the following properties in the `config/application-prod.yml` file:

- **location-path:** The path where the videos are stored.
- **max-disk-space:** Maximum disk space available for the video files before the system warn the user at the health check page (in megabytes).

Here is an example:

```
minium:
  manager:
    video:
      location-path: /opt/minium/videos
      # size in MB
      max-disk-space: 10240
```

### Important:



The Selenium Video Node retrieves the video from the node and store it in the folder (passed by a parameter). The parameter must math the path configured at `minium.manager.video.location-path`

## 6.6. Minium version auto-update

For the version of `minium-cucumber-parent` to be automatically updated for the projects have that auto-update enabled:

- Set the `minium.manager.jenkins.miniumCucumberParentVersion` property to the

target version. To use the latest version instead of a specific version, set the value of the property to the minimum version and add a , after it (for example 1.9.5,). If this property is not defined, the tests will run with the version defined on the POM even if auto-update is enabled.

- The Maven installation used by Jenkins (Manage Jenkins > Global Tool Configuration) must have name `maven_jenkins`, and the user who runs Jenkins must have permission to execute the binary.

## 6.7. Error Message (Jenkins)

To print the errors at the console output, you need to add the error pattern (regular expression based in the `java.util.regex` package) that occurs in the console output of the child job (e.g. `/ERROR: Subversion checkout has been canceled/`). You can configure the patterns at the `minium.manager.jenkins.error-patterns` property list. When the pattern matches with a line at the console output of the child job, the console output will be added to the pipeline job until we find an empty line, or the line "Build was aborted". The error will be propagated to the pipeline job and will be printed at the front-end of Minium Manager. Example:

```
error-patterns:
  - type: Module
    patterns:
      - '/org\.mozilla\.javascript\.JavaScriptException: Error: Module
        \".+\\" not found\..*/'
  - type: SCMInvalidCredentials
    patterns:
      -
        '/org\.tmatesoft\.svn\.core\.SVNAuthenticationCancelledException: svn:
        E200015: Authentication cancelled/'
        - '/ERROR: Subversion checkout has been canceled/'
        - '/fatal: Authentication failed for.+/'
```

At front-end, Minium Manager displays a user-friendly message for the common cases:  
`/org\.mozilla\.javascript\.JavaScriptException: Error: Module \".+\\" not found\..*/` (Module missing at the project) and `/org\.tmatesoft\.svn\.core\.SVNAuthenticationCancelledException: svn: E200015: Authentication cancelled/, /ERROR: Subversion checkout has been canceled/` (Wrong credentials for the scm repository).

When we detect errors of the type **SCMInvalidCredentials**, an email will be sent to warn the users (configured at the report section of the project's configuration, if any).

## 6.8. Monitoring And Cookie

To configure the Minium Manager to execute monitoring and cookie projects, set the following properties in the `config/application-prod.yml` file:

- **agents-monitoring-label:** The given name of Jenkins Node that will execute the monitoring projects.
- **max-projects-monitoring-per-agent:** Maximum number of monitoring projects that executes per node.
- **agents-cookie-label:** The given name of Jenkins Node that will execute the cookie projects.

- **max-projects-cookie-per-agent:** Maximum number of cookie projects that executes per node.

Here is an example:

```
minium:
  manager:
    jenkins:
      agents-monitoring-label:
        - monitoring-agent
      max-projects-monitoring-per-agent: 10
      agents-cookie-label:
        - cookie-agent
      max-projects-cookie-per-agent: 10
```

## Cookies

The Jenkins Node that will be executing the cookie projects needs the following environment vars:

- **MINIUM\_COOKIES\_CLASSPATH:** This environment variable will store the classpath required to execute the cookie projects. This var needs to point to the jar `minium-core-extensions.jar` of the bundle (located at `./tools/lib/minium-core-extensions.jar`). At the end of the var, its required to append the jar with the static value `target/test-project.jar`. To separate this two jars, use the classpath separator correctly: on all Unix-like operating systems use a colon (":"); on Windows use a semicolon (";"). E.g. `/opt/minium/lib/minium-core-extensions.jar:target/test-project.jar`.
- **NODE\_PATH:** The node path need to have installed the package `headless-chrome-crawler` and `puppeteer@1.20.0`.

To configure the **NODE\_PATH** globally, you can define a path to your **NODE\_PATH** environment variable (e.g. `/opt/minium/crawler_dependencies/lib/node_modules/`) and use the following commands to install the dependencies:

```
npm i -g headless-chrome-crawler && npm i -g puppeteer@1.20.0
```

After, copy the file `cookie-exporter.js` at the bundle (located at `./tools/crawler/cookie-exporter.js`) to the folder `exporter` of the node module `headless-chrome-crawler` (e.g. `/opt/minium/crawler_dependencies/lib/node_modules/headless-chrome-crawler/exporter/cookie-exporter.js`)


### Note:



If the `Monitoring` and `Cookie` projects needs proxy to run the tests, you can use the property `-Dminium.monitoring.performance.httpProxy`. Example: `-Dminium.monitoring.performance.httpProxy=localhost:8080`.

## 6.9. Executors

An executor allows a test execution to be executed and each executor can run ONE test execution at the time. In order to run parallel test executions, you need to choose an executor for each project.

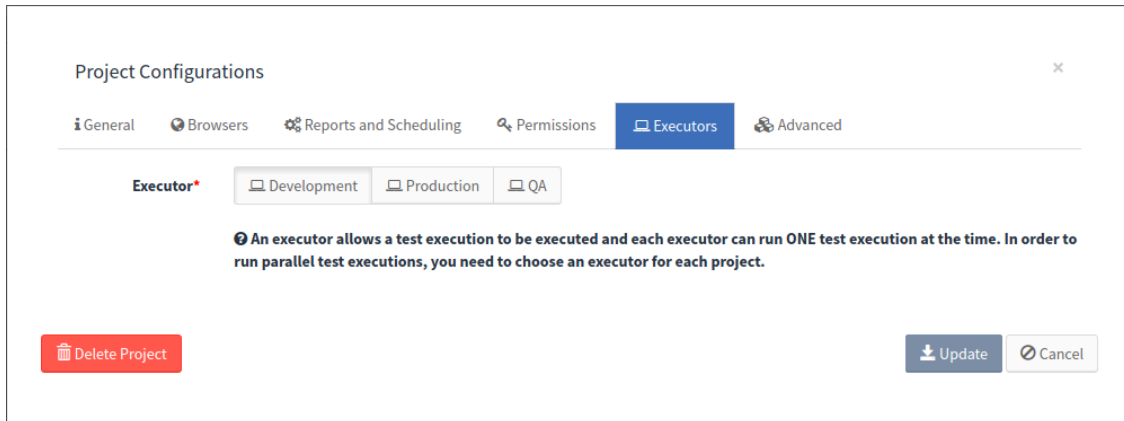

- **home-dir**: Jenkins home directory
- **executors**: List of executors. Each executor has a name and label (this label will be shown in the UI).

Here is an example:

```
minium:
  manager:
    jenkins:
      home-dir: /home/minium-manager/data/jenkins
  executors:
    - name: dev
      label: Development
    - name: prod
      label: Production
    - name: qa
      label: QA
```

## 6.10. Additional WebDriver configurations

Additional WebDriver configurations can be set by adding profiles to the `config/application-webdrivers.yml` corresponding to the browser names and/or versions. Examples:

```
# adds the marionette capability when running tests on Firefox 47
spring:
  profiles: firefox47

minium:
  webdriver:
    desiredCapabilities:
      marionette: false
---
# starts Chrome, regardless of the version, with the no-sandbox argument
spring:
  profiles: chrome

minium:
  webdriver:
    chromeOptions:
      args:
        - no-sandbox
```

## 6.11. Lacaixa Configurations

Since lacaixa have custom features in Minium Manager, they are separated in the property `minium.manager.lacaixa`.

At this property, we have the following configurations:

- `allow-scm-error`: This configuration allows to continue the execution despite the error at the scm credentials.
- `data-extraction-report-types`: Configure the types of projects available at the Data Extraction Report.

### **allow-scm-error**

We have several configurations at this configuration:

- `enabled`: Enables or disables the configuration. The default is `false`.
- `send-mail-notification`: Notify the users by e-mail the backup checkout was used to run the execution. The default is `true`.
- `paths-to-checkout`: Paths at the Jenkins master and Nodes where the backup checkouts will be stored.

Example configuration:

```
minium:
  manager:
    lacaixa:
      enabled: true
      send-mail-notification: false
      paths-to-checkout:
        master: /opt/minium/data/jenkins-backup/
        monitoring: /opt/minium/data/jenkins-backup/
        cookie: /opt/minium/data/jenkins-backup/
```

### **data-extraction-report-types**

By default, the values configured are: `DEFAULT` and `MONITORING`.

The values allowed at this property are: `DEFAULT`, `MONITORING`, `COOKIE_MINIUM` and `COOKIE_CRAWLER`.

## 6.12. Integration with HP ALM

Minium Manager allow integration with HP Application Lifecycle Management (HP ALM). After Minium Manager execute the tests, the results are imported into HP ALM. Afterwards, see the results published in ALM.

Before configuring a project that imports the tests results to HP ALM, first configure the HP ALM Server at jenkins.

To configure the HP ALM Server at jenkins, edit the `./tools/jenkins/com.hp.application.automation.tools.settings.AlmServerSettingsBuilder.xml` file to replace `${ALM_NAME}` and `${ALM_URL}` properties with the name of the ALM Server and the endpoint to the ALM Server, respectively.

If already launched Minium Manager (i.e. the folder `./data/jenkins/` already exists), edit the `./data/jenkins/com.hp.application.automation.tools.settings.AlmServerSettingsBuilder.xml` file as well.

It is also required edit the `./config/application-prod.yml` as follows:

```
minium:
  manager:
    alm:
      url: <alm_url> - also defined at the
com.hp.application.automation.tools.settings.AlmServerSettingsBuilder.xml
file
      server-name: <alm_server_name> - also defined at the
com.hp.application.automation.tools.settings.AlmServerSettingsBuilder.xml
file
      username: <alm_username> - the username of the user configured at HP
ALM
      password: <alm_password> - the password of the username of the user
configured at HP ALM encrypted (see the Encrypt password section below how
to encrypt the password)
      baseURL: <baseURL_Minium_Manager> - the base URL of Minium Manager
to create the link at HP ALM
```

Launch Minium Manager and create/configure a project imports the tests results to HP ALM. The ALM properties can be found at the project properties by clicking at `Advanced configuration` button and selecting the `ALM` at Modules.

### 6.12.1. Encrypt password

Access the jenkins console through:

```
http://localhost:8080/jenkins/script
```

Update the following script to replace the `<password_here>` with the password desired to

encrypt.

```
println(hudson.util.Secret.fromString('<password_here>').getEncryptedValue  
( ))
```

Press `Run` and retrieve the password at the result.

## 6.13. Update Minium Manager

1. Download the `WAR` file provided by VILT
2. Stop the Minium Manager by running `minium-manager\tomcat\bin\shutdown. (bat|sh)` script
3. Delete `ROOT.war` (if exists), and the folder `ROOT` in `minium-manager\tomcat\webapps`
4. Copy and paste the new `.war` in `minium-manager\tomcat\webapps`
5. Restart tomcat by running `minium-manager\tomcat\bin\start. (bat|sh)` script

## 7. Troubleshooting Minium Manager

Most common problems with Minium Manager are reviewed in this chapter.

### Cannot start Minium Manager:

- Check if already have another service listening on the same port of the Minium Manager (default port: 8080). To configure a new port (to a standalone installation), change the `port` attribute value of the connector with the `protocol="HTTP/1.1"`, at the `./tomcat/conf/server.xml` file. For the docker installation, check this [website](#) in order to update the `docker-compose.yml` file.
- If configured Minium Manager with **MySQL** database, check if Minium Manager database is running and is reachable from the Minium Manager host.
- Check if the **CATALINA\_HOME** environment variable is defined with the path to a different tomcat.

### Cannot execute tests with Selenium Node:

- The error `org.openqa.selenium.remote.UnreachableBrowserException: Could not start a new session. Possible causes are an invalid address of the remote server or browser start-up failure.`
  - This error can occur when the Node configuration (`capabilities` section at the `node_5555.json` file) is wrong, or the webdriver version is no compatible with the browser version. Check the [\[Support Matrix\]](#) chapter to see if the webdriver version is compatible with the browser version. Also, check the [Node Configuration](#) chapter to see if the configuration is correct.
- The errors `org.openqa.selenium.WebDriverException: Session * was terminated due to SO_TIMEOUT` and `org.openqa.selenium.WebDriverException: Error forwarding the new session Error forwarding the request Read timed out Command duration or timeout: * seconds`
  - Raise the `browserTimeout` value at the `./selenium/hub/hub_4444.json` and restart the Selenium Grid (Hub and Nodes).
- The error `org.openqa.selenium.WebDriverException: JavaScript error (WARNING: The server did not provide any stacktrace information)`
  - Check if the browser has the JavaScript disable. If disabled, so enable it: <http://www.enable-javascript.com/>
- The error `org.mozilla.javascript.WrappedException: Wrapped org.openqa.selenium.WebDriverException: Failed to navigate to https://<username>:<password>@<host>/. This usually means that a call to the COM method IWebBrowser2::Navigate2() failed.`
  - This error can occur when we are using the basic authentication at internet explorer. To fix this you need to register a key:
    - **The 64-bit variant of IE with 64-bit variant of IEDriverServer.exe:**  
HKEY\_LOCAL\_MACHINE/SOFTWARE/Wow6432Node/Microsoft/Internet Explorer/MAIN/FeatureControl/FEATURE\_HTTP\_USERNAME\_PASSWORD\_DISABLE
    - **The 32-bit variant of IE with 32-bit variant of IEDriverServer.exe:**  
HKEY\_LOCAL\_MACHINE/SOFTWARE/Microsoft/Internet Explorer/MAIN/FeatureControl/FEATURE\_HTTP\_USERNAME\_PASSWORD\_DISABLE

### RD\_DISABLE

- After create a DWORD `iexplore.exe` with value `0` in this registry key you just created. More info at <https://stackoverflow.com/a/23519791>

### Cannot connect to the internet due to proxies issues:

- **Maven:** edit the file `settings.xml` of the maven used by Jenkins (at `./tools/maven/conf`) in order to put the proxies detail inside (uncomment the proxy options and fill in the proxy server detail) and save the file.
- **VN at Jenkins (java based):** check the [documentation](#) to pass the settings to the tomcat (e.g. `-Dhttps.proxyHost=host ... -Dhttp.nonProxyHosts=localhost|...`)
- **Git:** check the [documentation](#) to configure the proxy.

### Minium Manager is slow

If some pages are taking too long to load, it might be because the buffer pool size of MySQL is too small for the amount of data stored on the database. To increase it, change the value of the `innodb_buffer_size` configuration option of MySQL. A value of `1G` should be enough for most cases.

### PDF reports do not look as expected

If the appearance of PDF reports do not look as expected, it usually can be fixed by adding some options to the property's `minium.manager.pdf-generator.additional-settings` and `minium.manager.pdf-generator.additional-settings-object`. If the elements on PDF reports look too big or too small, set the `load.zoomFactor` parameter accordingly. Or, if there are icons missing on some reports, add the `load.jsdelay` parameter with a value of around 500 (milliseconds). Example:

```
minium:
  manager:
    pdf-generator:
      additional-settings-object:
        load.zoomFactor: 0.75
        load.jsdelay: 2000
```

You can check the properties for additional-settings [here](#) and for additional-settings-object [here](#).

### Black videos (and black screenshots at progress) for Selenium Nodes (Windows)

When using Remote Desktop to connect to a remote computer, closing Remote Desktop locks out the computer, displaying the logon screen. If you use RDP to connect to the machine, every time you exit the machine the GUI is disabled, and the video will be recorded as black. Also, the progress screenshots will be black.

To avoid problems with GUI, use the [tscon](#) utility to disconnect from Remote Desktop. `tscon` returns the control to the original local session on the remote computer, bypassing the logon screen. All programs on the remote computer continue running normally, including GUI tests.

To solve this issue:

1. create a batch file with this code:

```
for /f "skip=1 tokens=3" %s in ('query user %USERNAME%') do (  
  %windir%\System32\tscn.exe %s /dest:console  
  timeout 5  
)
```

2. Create a desktop shortcut to this file. To do this, right-click the batch file and select *Send to | Desktop (create shortcut)*.
3. In the shortcut properties, click *Advanced* and select *Run as administrator*.

Now, when you need to disconnect from Remote Desktop, double-click this shortcut on the remote computer (in the Remote Desktop window).



It is recommended to configure the [Autologon](#). With the Autologon, when the Selenium Node machine boots, it will sign in with a user and will have the GUI available.

An alternative is to use the VNC server to access the Selenium Nodes machine instead of RDP.

## 8. Uninstalling Minium Manager

Before actually removing Minium Manager please read all the chapters in this section.

### 8.1. Remove Databases

If using the embedded **H2** database the database directory is removed by deleting the directory created by the extraction of the installation bundle `minium-manager.zip`.

If **MySQL** it is be used it is necessary to manually drop the database.

### 8.2. Remove Standalone Installation Files



#### Note

Before proceeding shutdown Minium Manager.

Finally, after everything else is removed, remove Minium Manager installation files by deleting the directory created by the extraction of the installation bundle `minium-manager.zip`.

### 8.3. Remove Docker Installation Files

Through the docker commands, remove the installed docker with the following command:

```
docker rmi minium-manager:production
```

Finally, after everything else is removed, remove the Minium Manager configuration files by deleting the directory created by the extraction of the installation bundle `minium-manager.zip`.



# User Guide

# VILT Minium Manager: User Guide

## 9. Introduction

This document describes the user interface of the VILT - Minium Manager, version 2.6.

**Minium Manager** is a web testing automation platform designed to assure your platforms and applications perform as intended across several combination of browsers and OS's on a continuous integration fashion. If something is not working as expected, Minium Manager can send you notifications and can also record videos so you can easily identify problems, and also provides access to detailed reports on test executions and its results. With Minium Manager it is easy to write and manage tests: writing new tests gets almost as easy as writing English and test management is very straightforward.

With the purpose of giving you a way of assuring the quality of your platforms and applications, it provides you with different types of projects that can focus on different components of an application, such as usability, availability and performance. By allowing you to design more focused tests you can guarantee the robustness of you platforms and applications with Minium Manager

## 10. Projects

Configure projects in Minium Manager, in order to run and analyze end-to-end tests. All projects need to have a repository (`Git` or `SVN`) associated, where the code is stored, except the Cookie Crawler.

There are three type of projects: Web application testing, Monitoring and Cookie.

The Web application testing project is a Minium project that navigates a website in the same way a human would.

The Monitoring project is a Minium project that are executed with high frequency (every 5, 10, 20 minutes), and can give us a report about the availability of a certain page and performance metrics, with the objective to check that the page are working as expected.

The development workflow for a Monitoring project in Minium Developer will be similar to the web application testing project, providing an easy and quick way to write test. The configuration in Minium Manager is similar to other projects. The monitoring project does not have the browser configuration.

The Cookie project generates a report of cookies found during the navigation or crawl of a website. The Cookie is divided in two projects: Cookie Report project and Cookie Crawler project. The Cookie Report project is a Minium project (based on the monitoring project) that extracts the all browser cookies at the end of a scenario. The Cookie Crawler project is a crawler that given one or more URLs, it crawls the websites and, for each URL, extracts the all browser cookies.

### 10.1. Monitoring

To start the development of a monitoring project, you need to check the checkbox `Is a Monitoring Project?` to generate the monitoring project:

### New project **cucumber**

**Project type** Cucumber Project Automator Project

**Parent Directory**

**Project Name**

**Is a Monitoring Project?** This configuration will generate a different Cucumber Project, focused to retrieve information about the availability of a certain page and performance metrics.

Advanced Create Cancel

Here are some examples of the development workflow in Minium Developer of the monitoring project:

### 10.1.1. Check if the website is ok

Use case: You want to test if the URL is ok and get the performance in the reports

Scenario:

```
Scenario: Check Blog La caixa  
  When Check if website responds: "https://blog.caixabank.es/"
```

Step:

```
When(/^Check if website responds: "[^"]*"$/, function(url) {  
  browser.get(url);  
});
```

For a monitoring project, the expression `browser.get(url);` retrieves the data related to page load performance, the URL status, the number of requests, the page size and javascript errors. This information will be presented at the Minium Manager report.

### 10.1.2. Do a search on the website with refresh and check how long it took to load.

Use case: You want to perform a search on the website (where's there's a refresh after the search) and check if the results appear and get the performance of the page.

Scenario:

```
Scenario: Search
  Given I'm at
  "https://www.caixabank.es/particular/home/particulares_es.html"
  When Search for "CaixaBank" and check the results
```

Steps:

```
When(/^I'm at "([^"]*)"$/, function(url) {
  browser.get(url);
});

When(/^Search for "([^"]*)" and check the results$/, function(search) {
  $("#cookies-accept-full a").click();
  $("#search-field").fill(search);
  $("#prebuscadorCabecera input[type='submit']").click();
  expect($(".search-result-block").to.exist());
  scenario.write(browser.getPerformance());
});
```

The expression `scenario.write(browser.getPerformance());` retrieves and store the data related to the last page load performance, the URL status, the number of requests, the page size and javascript errors. This information will be presented at the Minium Manager report.

### 10.1.3. Click on a link and get the performance of the page

```
When(/^I click on link with text "([^"]*)"$/, function(text) {
  $("a").withText(text).click();
  expect($(".page-title").to.exist());
  scenario.write(browser.getPerformance());
});
```


## 10.2. Cookie

Since the Cookie Report project is a Minium project (based on the monitoring project), to create a Cookie Report project, simply generate a Monitoring project in Minium Developer. It is not necessary to add extra instructions to the minium code, since all browser cookies will be automatically extracted at the end of each scenario.

For the Cookie Crawler project, development is not necessary, you only need to provide one or more URLs to crawl.

## 10.3. Setup a project

To set up a project, click on the button `New Project`:

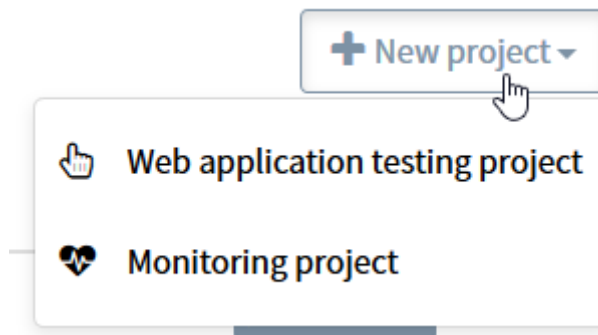

There are 4 project types we can select:

- Web application testing project
- Monitoring project
- Cookie Report project
- Cookie Crawler project

Then, fill the form:

### 10.3.1. General

Create or edit a Project ✕

**General** | Browsers | Reports and Scheduling | Advanced | Runtime | API

**Name\***  ✓

**Description**

**Labels**  + Add ▾

**Repository**

**Type\***  Git  Subversion

**URL\***

**Username**

**Password**  👁

**Branch**

On the `General` tab, fill the following fields:

<b>Name</b>	Display name of the project (e.g gmail-e2e-tests)
<b>Description</b>	Optionally provide a project description
<b>Labels</b>	Associated labels to a project in order to organize and filter projects.
<b>Type</b>	Type of SCM repository
<b>Url</b>	URL of the repository where the project with the features is stored. The following are examples of valid git URL's (or a local file path):  <a href="https://github.com/github/git.git">https://github.com/github/git.git</a>  //path-to-repo/repos/gmail-e2e-tests
<b>Username/Password</b>	Credentials for authentication on the repository.
<b>Branch</b>	The name of the branch you want to execute (GIT only). The default value is <code>master</code>

## Cookie Crawler

For the Cookie Crawler project the General tab is different:

Create or edit a Project ×

---

General

⚙ Reports and Scheduling
⚙ Advanced
▶ Runtime
↻ API

**Name\***

**Description**

**Labels**  + Add ▾

Cookie Crawler Settings

---

**Urls crawler\***

**Domains to Filter\***

**Max Depth\***  ▾ ▹

**Accept Cookies**  Active

Cookies Validations

---


**Configurations** Set the cookie name and/or value and/or URL of the cookies you want to validate.

+

↓ Save
⊗ Cancel

<b>Urls crawler</b>	The URLs you want to crawl (e.g. <a href="https://www.caixabank.es/index_es.html">https://www.caixabank.es/index_es.html</a> )
<b>Domains to Filter</b>	The domains you want to filter at the crawl (e.g. <a href="http://www.caixabank.es">www.caixabank.es</a> )
<b>Max Depth</b>	Maximum depth for the crawler to follow links automatically
<b>Accept Cookies</b>	Accept the cookie warning during the crawl (is related to the field <code>Script to accept cookies</code> at the Runtime tab of the Cookie Crawler project).
<b>Cookies Validations</b>	the cookie name and/or value and/or URL of the cookies you want to validate. After you configure one validation, click at the button <code>+</code> to add the validation.

## 10.3.2. Browsers

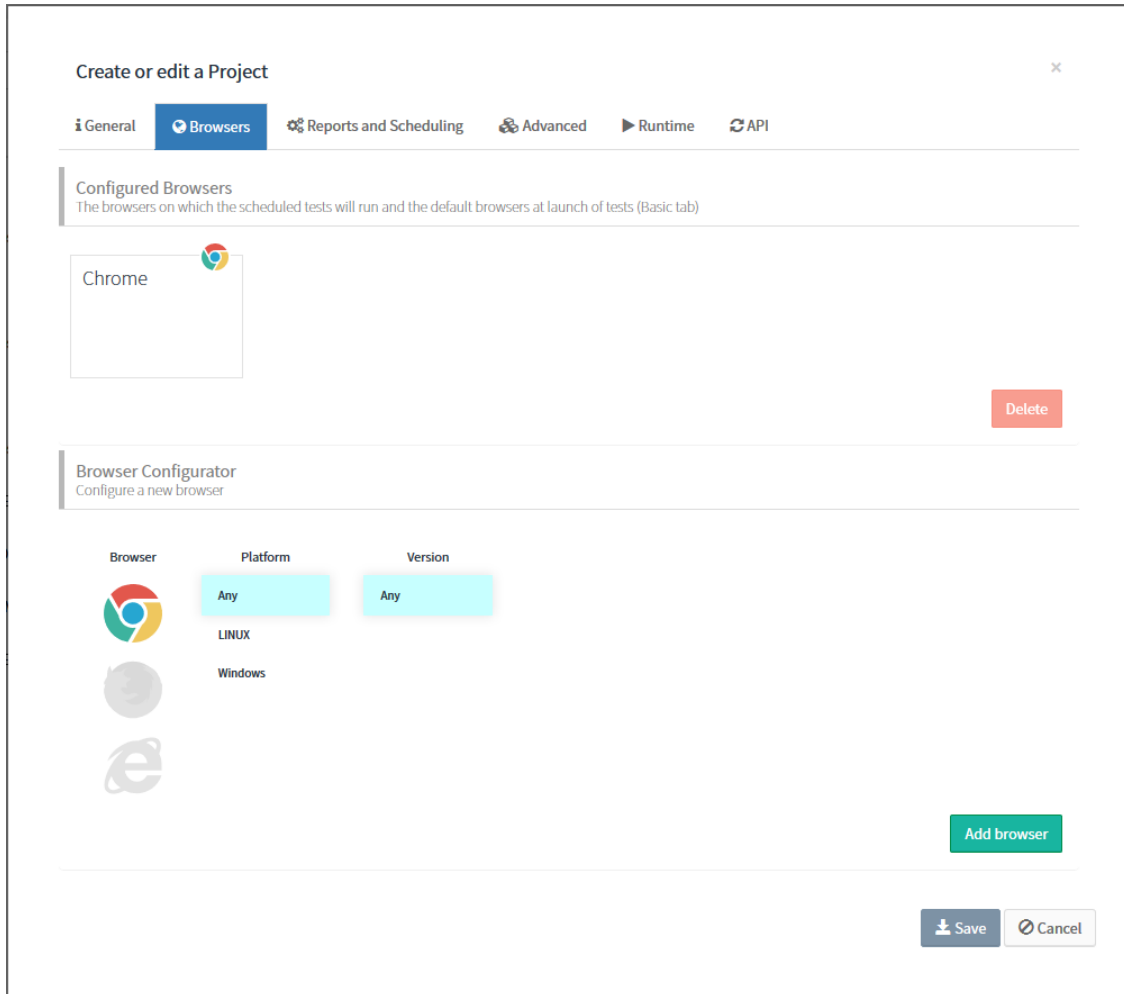

On the `Browsers` tab, choose the browsers on which the scheduled tests will run, and the default browsers at launch of tests.

To configure the browsers, click `Add more browsers` to expand the available browsers and select a browser (and the properties) and/or the mobile devices (emulated via chrome). After, click `Add browser` or `Add device` (for mobile devices).

If you want to remove a configured browser, move the mouse over the browser configuration (below the configured browsers) and click on the trash icon.



**Note:**

The `Browsers` tab is not available for the monitoring and cookie projects.

## 10.3.3. Reports and Scheduling

Create or edit a Project ✕

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

---

General
Browsers
Reports and Scheduling
Advanced
▶ Runtime
↻ API

---

Emails

**Recipients**

Send only when there are test failures

**Report formats**

PDF
 XLSX

PDF with screenshots

---

Scheduling

**Scheduler**  Never run

Every Day

Every Week

Every Month

Every Day at midnight

Custom

Cron Expression

Save
Cancel

On the `Reports` and `Scheduling` tab, fill the following fields:

<b>Recipients</b>	Set email addresses to receive a report of execution for the project. If you only want to receive the report of the executions that contains failed tests, check the option "Send only when there are test failures". Also, if the credentials of the SCM repository fails, the email addresses will receive a notification warn the users that the SCM credentials are invalid ou incorrect.
<b>Report formats</b>	Set the format(s) that the report of execution will be sent to the email. If you want to receive the pdf report with screenshots, check the option "PDF with screenshots".
<b>Scheduler</b>	Set the schedule you want to execute the project and send the report of the execution. If you choose the option <code>Custom</code> , you can set a custom schedule.

<b>Scheduler Custom Configurations</b>	Set the schedule you want to execute the project and send the report of the execution with different levels of granularity.
<b>Cron Expression</b>	Set the schedule you want to execute the project and send the report of the execution via a cron expression.

## Monitoring

For the monitoring project the `Reports` and `Scheduling` tab contains more configurations:

Create or edit a Project
×

Monitor page load performance. Make informed optimization armed with the size and load time of your applications.

---

General
Reports and Scheduling
Advanced
▶ Runtime
API

---

### Emails

**Reports**  Active

**Recipients**

Send only when there are test failures

**Report formats**

PDF
 XLSX

PDF with screenshots

Send email when a webpage is not responding or is recovered

---

### SMS

**Alert**  Active

**Recipients**

---

### Scheduling

**Scheduler**  Active

Every 5 minutes

Every 10 minutes

Every 15 minutes

Every 20 minutes

Every 30 minutes

Custom

Cron Expression

**Cron Expression**

Save Cancel


On the `Reports` and `Scheduling` tab for the monitoring projects, you can also need to fill the

following fields:

<b>Send email when a webpage is not responding or is recovered</b>	Send the email notification to the emails configured at the Recipients (Emails) configured to warn the user when the website is not responding, or the website recovers (from a failure).
<b>Recipients (SMS)</b>	Set mobile phone numbers to receive an SMS when the project.

### Cookie Crawler

For the monitoring project the `Reports` and `Scheduling` tab contains more configurations:

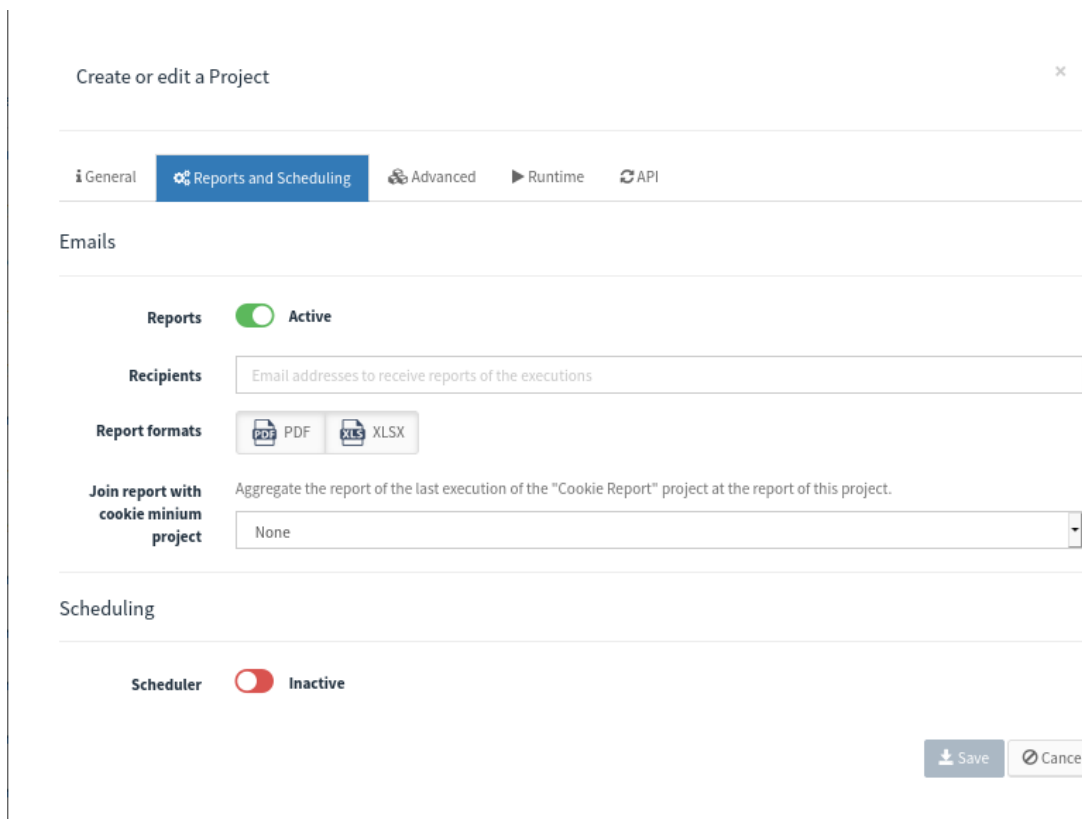

On the `Reports` and `Scheduling` tab for the Cookie Crawler projects, you can also need to fill the following fields:

<b>Join report with cookie minium project</b>	Set the Cookie Report project to the Cookie Crawler project to join the cookie report in a single project. The report generated will contain the result of the last execution of the Cookie Crawler project, and the result of the last execution of the Cookie Report project.
---	---

### 10.3.4. Advanced

Project Configurations ×

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

---

General
Browsers
Reports and Scheduling
Advanced
Runtime
API

---

**Permissions**

Name	Read	Write	Launch tests
Minium Team	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

+ Append

**Store execution videos**  **Inactive**

**Max number of test executions passed stored**

**Max number of test executions failed stored**

**Module**


Delete Project
Update
Cancel

On the **Advanced** tab, fill the following fields:

<b>Permissions</b>	Add and personalize the level of access that assigns to each user or group.
<b>Store executions videos</b>	Configuration to allow the storage of videos of the executions. When inactive, no videos will be stored, otherwise the videos will be stored. By default, the storage of videos is inactive.
<b>Max number of test executions passed stored</b>	Set the max number of executions passed to be stored at Minium Manager. The default value is 30.
<b>Max number of test executions failed stored</b>	Set the max number of executions failed to be stored at Minium Manager. The default value is 30.
<b>URL Loading time threshold</b>	Maximum time to load a page (in seconds) to warning the user at the executions page. <b>Available only to Monitoring projects</b>

<b>Module</b>	The path to the folder where the features are in the repository (e.g. minium-developer-e2e-tests).
---------------	--

### 10.3.5. Runtime

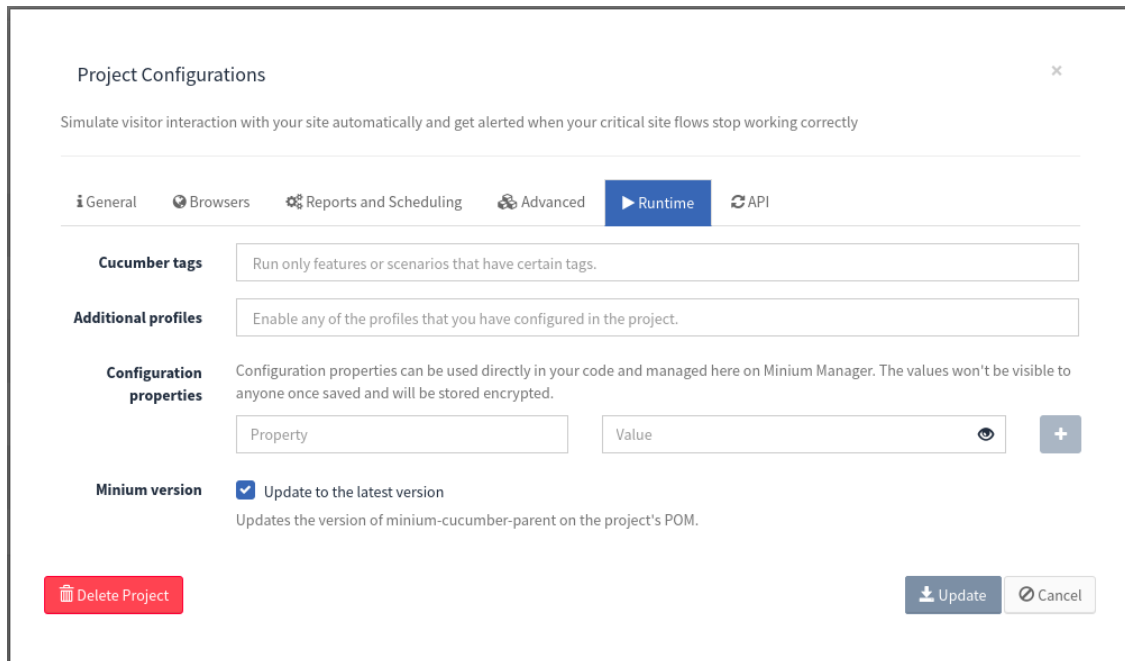

At the `Runtime` tab, fill the following fields:

<b>Cucumber tags</b>	Use this option to tell Minium Manager that only run features or scenarios that have certain tags.
<b>Additional Profiles</b>	Enable any of the profiles that are configured in the <code>./config/application.yml</code> project file. See <a href="#">Configuration profiles</a> for more details.
<b>Configuration properties</b>	This configuration properties can be used directly in your code and managed here on Minium Manager. The values won't be visible to anyone once saved and will be stored encrypted.

#### Cookie Crawler

For the Cookie Crawler project the Runtime tab is different:

Create or edit a Project ✕

---

General
Reports and Scheduling
Advanced
▶ Runtime
API

---

**Inject Cookie** Set the cookies you want to inject at the cookie crawler.

+


**Script to accept cookies** Add your script to accept the cookies.

```
await page.waitForSelector("#cookies-accept-full > a", { visible: true, timeout: 10000 });
await page.click("#cookies-accept-full > a");
await page.waitFor(2000);
```

Save
Cancel

<b>Inject Cookie</b>	The cookies you want to inject at the crawl (e.g. cookie to accept the cookie warning)
<b>Script to accept cookies</b>	The script to accept the cookie warning (in <a href="#">puppeteer</a> ). This field is related to the field <code>Accept Cookies</code> at the General tab of the Cookie Crawler project. The default script accepts the cookie warning for <a href="https://www.caixabank.es">https://www.caixabank.es</a> .

### 10.3.6. API

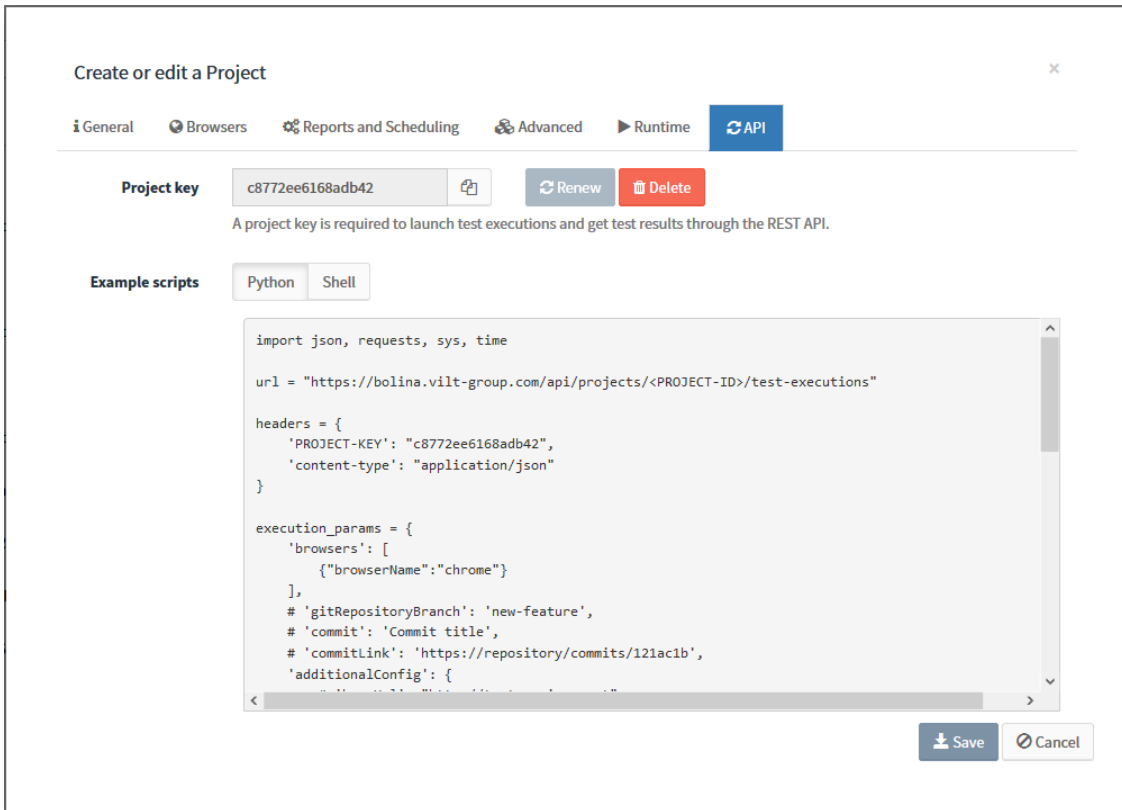

On the `API` tab, fill the following fields:

<p><b>Project key</b></p>	<p>Generate a project key (required to launch test executions and get test results through the REST API).</p>
<p><b>Example scripts</b></p>	<p>Once the project has an API key, the scripts will be fulfilled with the project-specific data and ready to use. The first part of the script shows how to launch a test execution.</p>

## 10.4. Project permissions

Manage the access levels of the users/groups in the projects. It is also possible to add and personalize the level of access that assigns to each user or group, per-project.



**Note:**

Write permissions is required to update the permissions of a project.

In order to change the project permission the first step is go to the project configuration and click on tab `Permissions`.

Project Configurations ×

General Browsers Reports and Scheduling Executors Advanced Runtime API

---

**Permissions**

Name	Read	Write	Launch tests	
admin	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
minium.team	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
qa.team	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
eng.team	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

+ Append

**Max number of test executions stored**

**Module**

Delete Project

Update
Cancel

Add user or groups to the permission table. Below the permission table, start typing the name of the user or group desired. Then click on the button `Append`.



**Note:**

It is possible to select more than one user or group.

bob ×

alice ×

+ Append

After the users or groups was appended to the permissions table, define the permission for each entry appended and click `Update` to save the project configurations.

Project Configurations ×

General
Browsers
Reports and Scheduling
Executors
Advanced
Runtime
API

---

**Permissions**

Name	Read	Write	Launch tests	
admin	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
minium.team	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
qa.team	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
eng.team	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
bob	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
alice	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Type the name of a user or group + Append


**Max number of test executions stored**

**Module**

Delete Project
Update
Cancel

## 10.5. Organise projects by Labels or Groups

**Labels** were meant to be used only to filter projects in the Projects page providing a useful way to organize the projects.

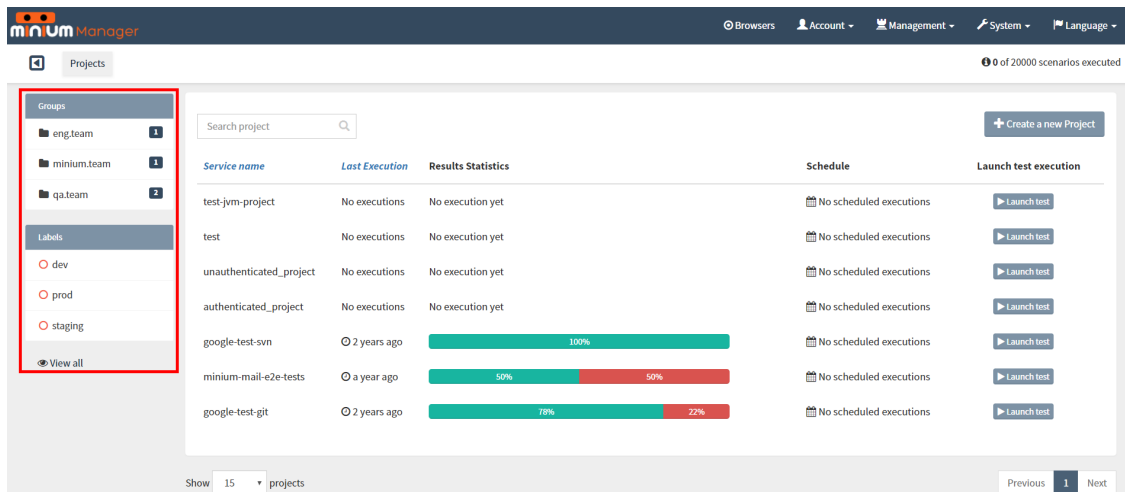


The screenshot shows the 'Projects' page in the Minium Manager interface. On the left, there is a sidebar with 'Groups' (eng.team, minium.team, qa.team) and 'Labels' (dev, prod, staging, View all). The main area displays a table of projects with columns for Service name, Last Execution, Results Statistics, Schedule, and Launch test execution. A search bar and 'Create a new Project' button are also visible.


Service name	Last Execution	Results Statistics	Schedule	Launch test execution
test-jvm-project	No executions	No execution yet	No scheduled executions	<span style="background-color: #007bff; color: white; padding: 2px 5px;">Launch test</span>
test	No executions	No execution yet	No scheduled executions	<span style="background-color: #007bff; color: white; padding: 2px 5px;">Launch test</span>
unauthenticated_project	No executions	No execution yet	No scheduled executions	<span style="background-color: #007bff; color: white; padding: 2px 5px;">Launch test</span>
authenticated_project	No executions	No execution yet	No scheduled executions	<span style="background-color: #007bff; color: white; padding: 2px 5px;">Launch test</span>
google-test-svn	2 years ago	<div style="width: 100%;"><div style="width: 100%; background-color: #28a745;"></div></div> 100%	No scheduled executions	<span style="background-color: #007bff; color: white; padding: 2px 5px;">Launch test</span>
minium-mail-e2e-tests	1 year ago	<div style="width: 100%;"><div style="width: 50%; background-color: #28a745;"></div><div style="width: 50%; background-color: #dc3545;"></div></div> 50%	No scheduled executions	<span style="background-color: #007bff; color: white; padding: 2px 5px;">Launch test</span>
google-test-git	2 years ago	<div style="width: 100%;"><div style="width: 78%; background-color: #28a745;"></div><div style="width: 22%; background-color: #dc3545;"></div></div> 78%	No scheduled executions	<span style="background-color: #007bff; color: white; padding: 2px 5px;">Launch test</span>

### 10.5.1. Manage Labels

To manage the labels, open the `Management` menu and click on `Labels`:

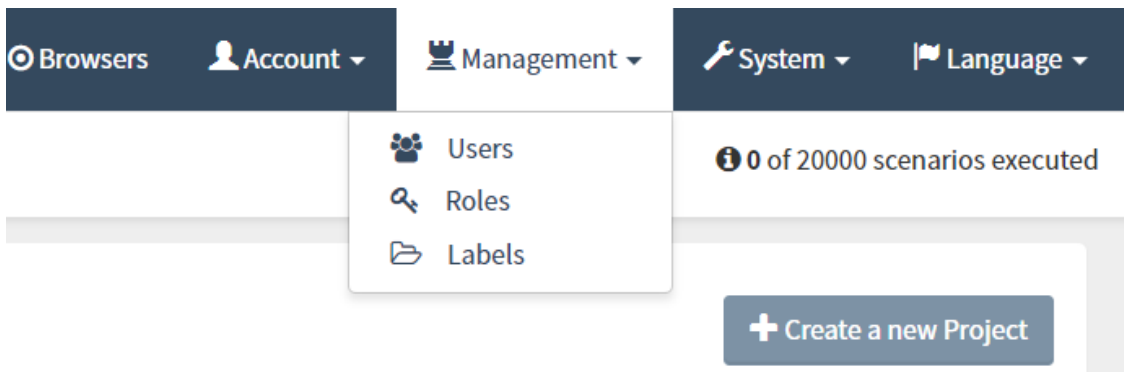

The Labels page is shown with all current labels. Edit, delete and create new ones if desired.

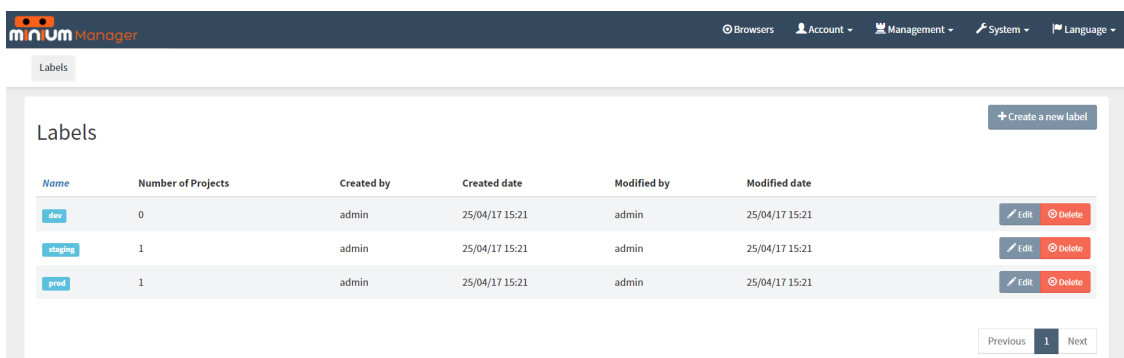


To create a new label, click on `Create a new label`. To delete or edit an existing label, click on `Edit` or `Delete` respectively.




## 10.5.2. Assign labels to the projects

To assign some labels to a project, go to the project configurations:

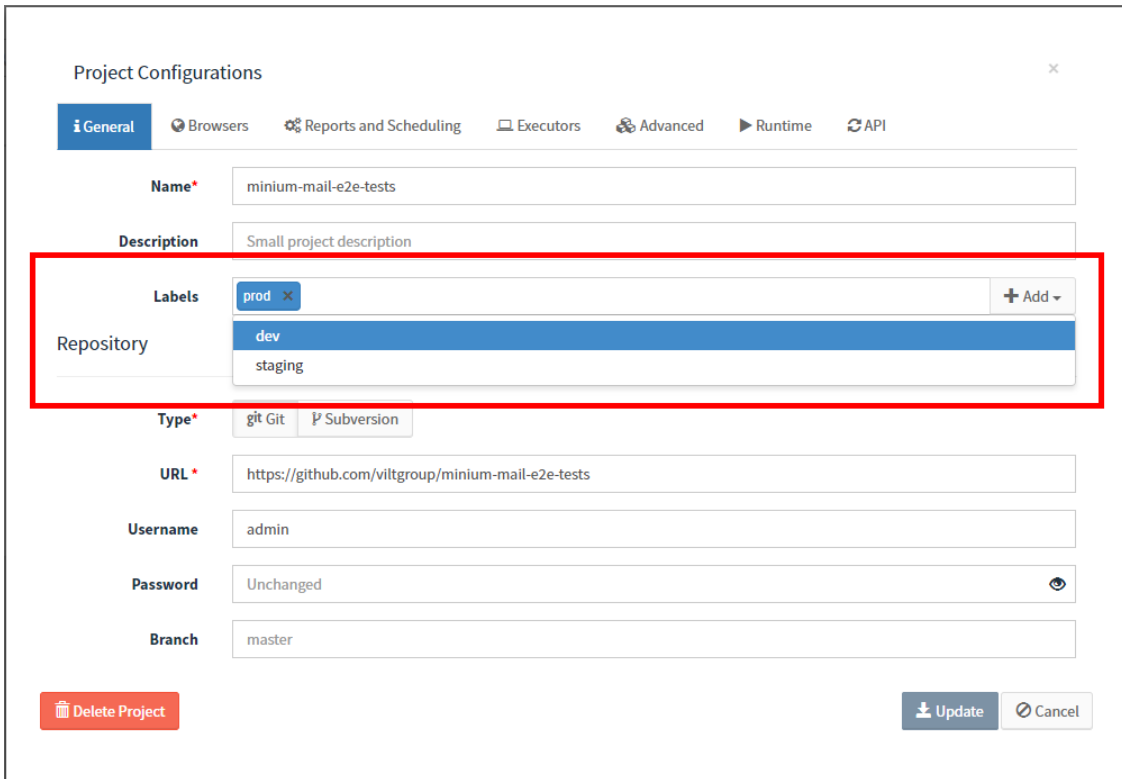

The screenshot shows the 'Project Configurations' dialog box with the 'General' tab selected. The 'Labels' section contains a list with 'prod' and an 'Add' button. The 'Repository' section contains a dropdown menu with 'dev' and 'staging' options. A red box highlights these two sections.

The Add button can be used to create new labels if needed.

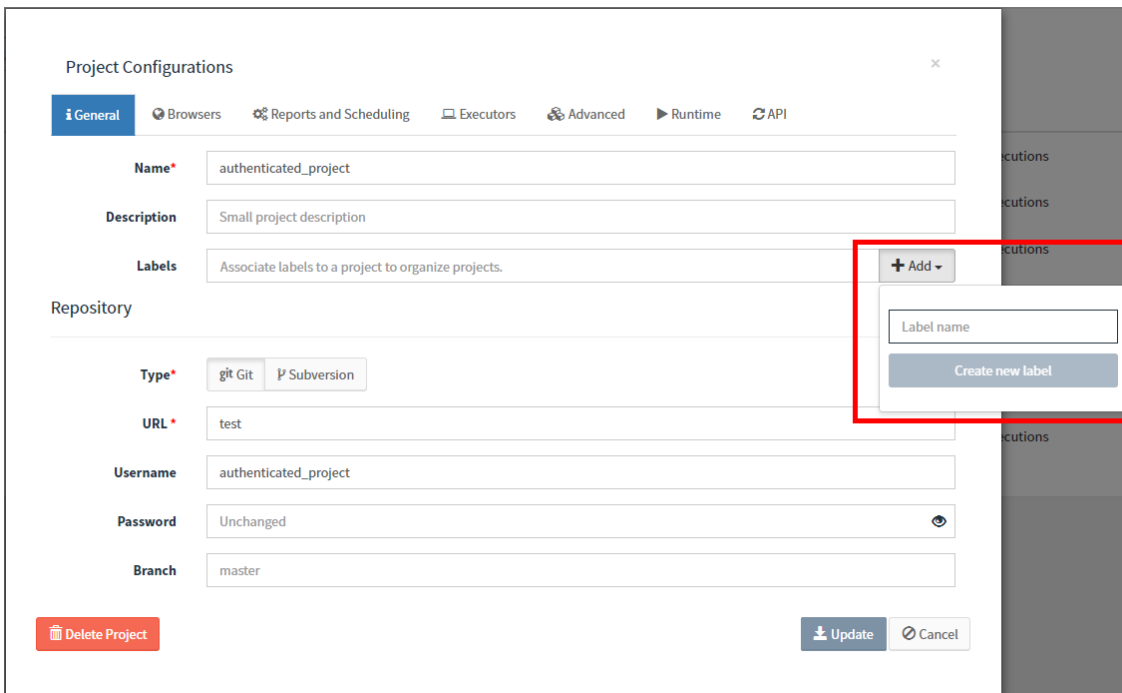

The screenshot shows the 'Project Configurations' dialog box with the 'Labels' section. The 'Add' button is highlighted with a red box, and a 'Create new label' dialog box is open over it, showing a 'Label name' input field and a 'Create new label' button.


### 10.5.3. Manage groups

**Groups** are intended to organize projects at a higher level and to perform changes in several projects at a time.

## Manage groups using LDAP authentication

If Minium Manager is using LDAP to manage the users, the groups are configured through the LDAP.

In the project configuration, search for groups. Below the permission table, start typing the name of the user or group. This will perform a search into the LDAP directory.

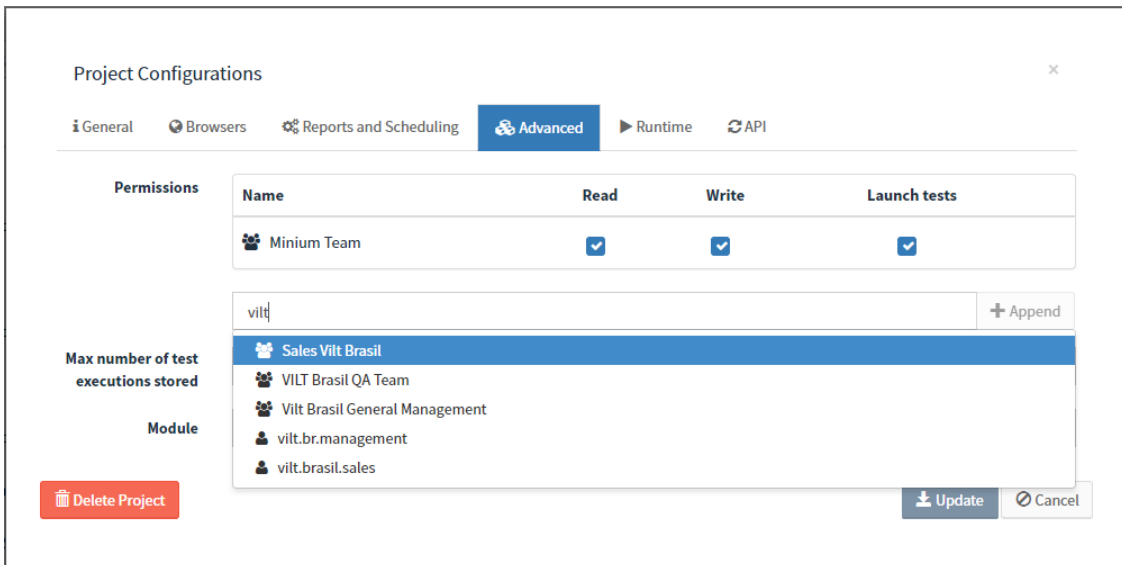

The screenshot shows the 'Project Configurations' dialog box with the 'Advanced' tab selected. It features a permissions table and a search dropdown for LDAP groups.

Permissions	Name	Read	Write	Launch tests
	Minium Team	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Search input: vilt

- Sales Vilt Brasil
- VILT Brasil QA Team
- Vilt Brasil General Management
- vilt.br.management
- vilt.brasil.sales

Buttons: Delete Project, Update, Cancel


## Manage groups without LDAP authentication

If Minium Manager is **not** using LDAP authentication, create new groups through the user management UI.





### Note:

Only the users with `Admin` privileges are allowed to create groups.

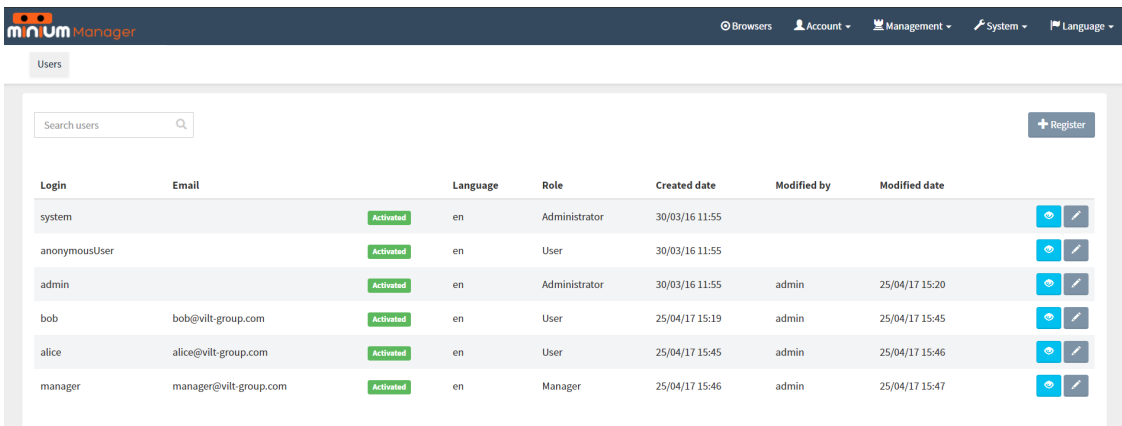


The screenshot shows the 'Users' management page in Minium Manager. It includes a search bar, a '+ Register' button, and a table of users.

Login	Email	Language	Role	Created date	Modified by	Modified date	
system		en	Administrator	30/03/16 11:55			<input type="checkbox"/> <input type="checkbox"/>
anonymousUser		en	User	30/03/16 11:55			<input type="checkbox"/> <input type="checkbox"/>
admin		en	Administrator	30/03/16 11:55	admin	25/04/17 15:20	<input type="checkbox"/> <input type="checkbox"/>
bob	bob@vilt-group.com	en	User	25/04/17 15:19	admin	25/04/17 15:45	<input type="checkbox"/> <input type="checkbox"/>
alice	alice@vilt-group.com	en	User	25/04/17 15:45	admin	25/04/17 15:46	<input type="checkbox"/> <input type="checkbox"/>
manager	manager@vilt-group.com	en	Manager	25/04/17 15:46	admin	25/04/17 15:47	<input type="checkbox"/> <input type="checkbox"/>

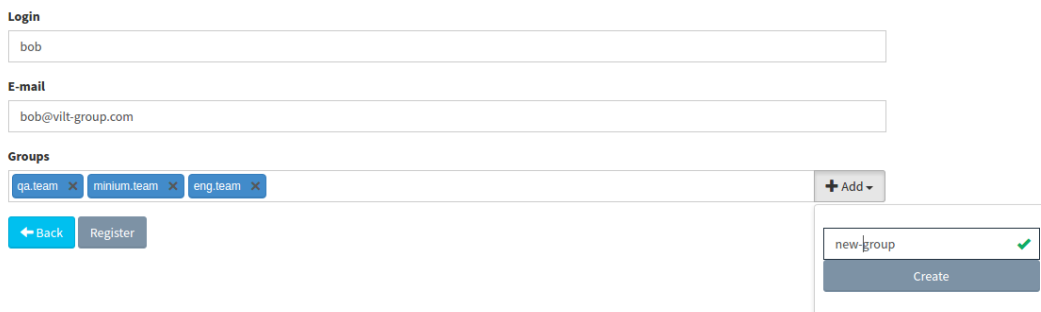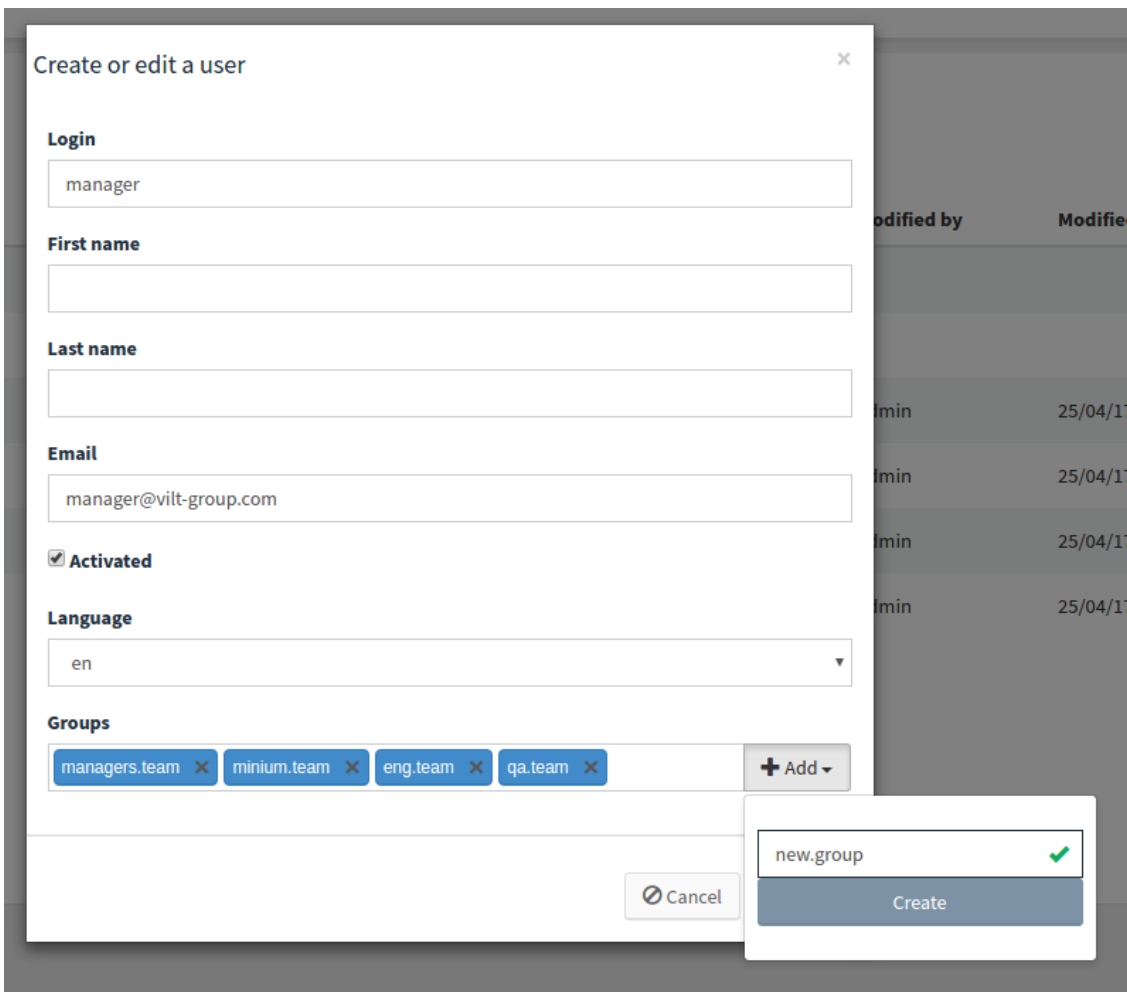


If desired, add permissions to the group recently created in the project configuration. Below the permission table, start typing the name of the group created.

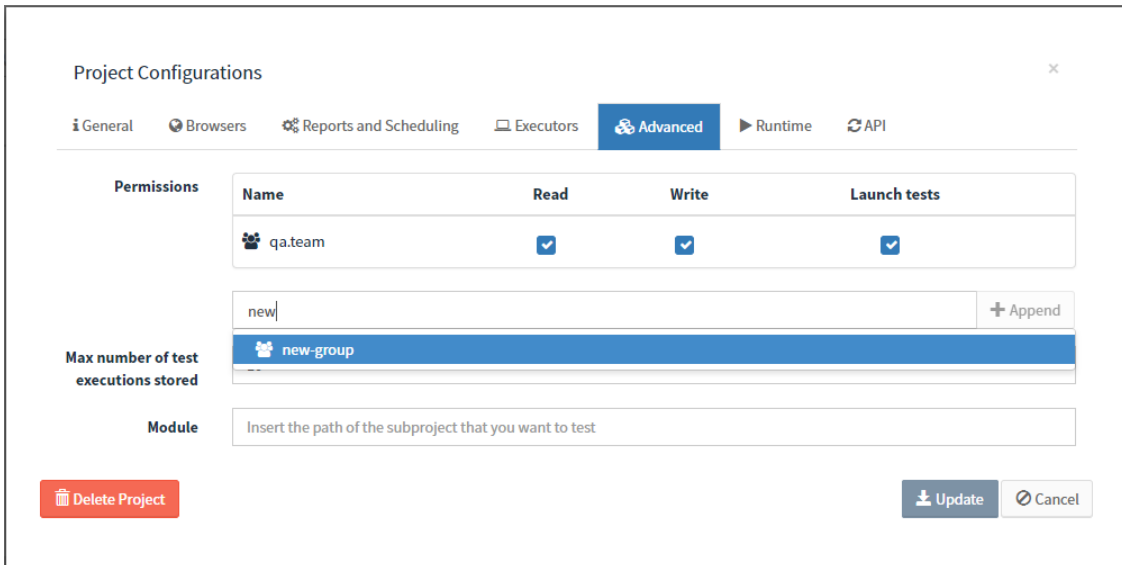

## 10.5.4. Organise Projects


Using **groups** and **labels** to organise the projects selecting a group and labels from the sidebar.

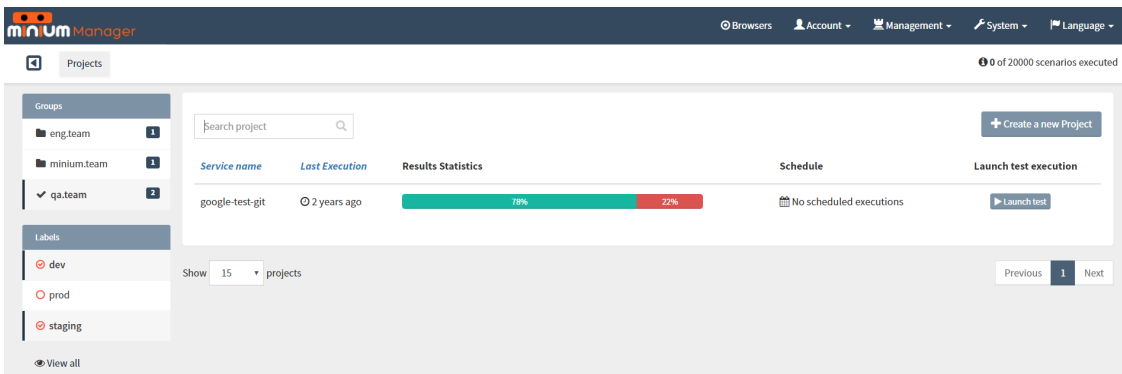


Select one **group** at a time, but select multiple **labels** and combine both.

In the case of the figure above, notice that the **group qa.team** is selected and two **labels** are also selected (**dev** and **staging**). With filters applied, exists one project shown in the project list.


This means that the one project belong to the **group qa.team** (see it in the figure below).

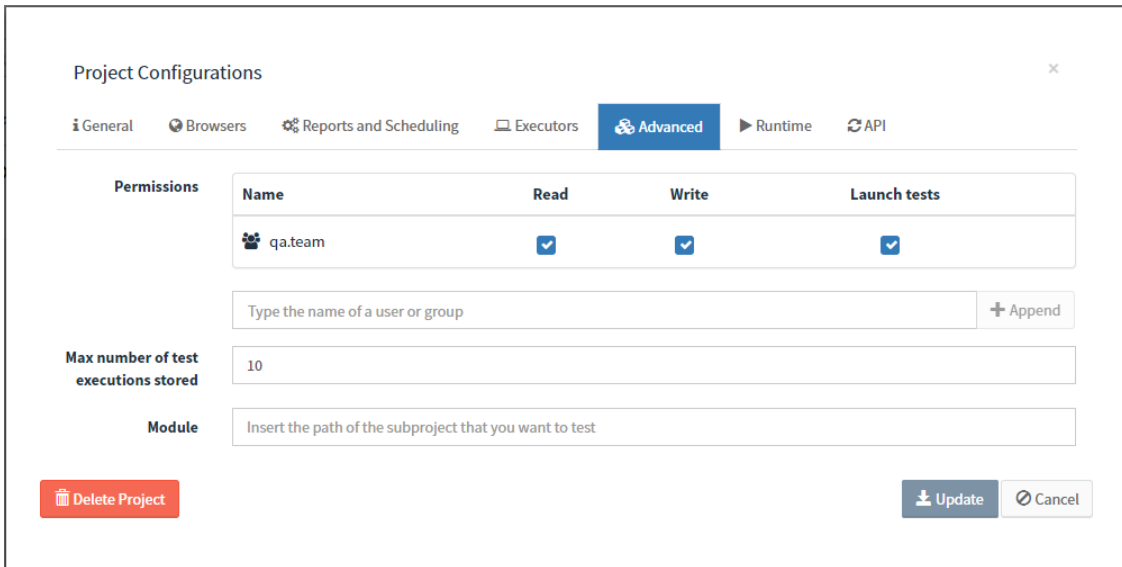

The project either has the **label dev** or **staging** associated with it in the project configuration (as shown in the figure below).

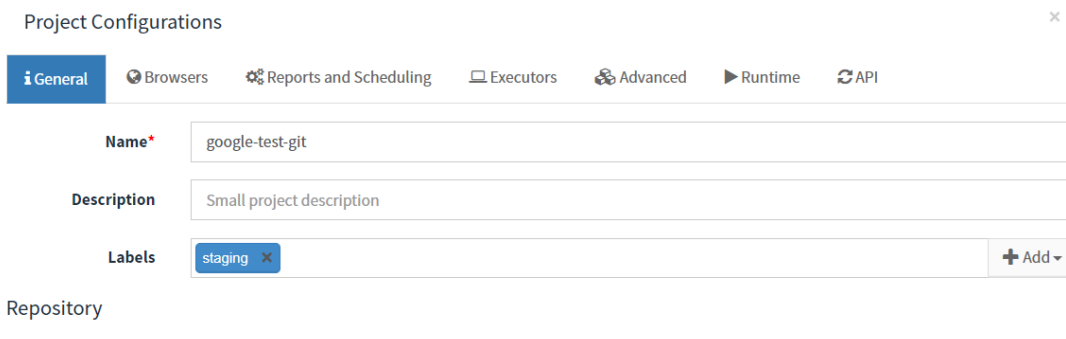

Select a **group** or **one or more label**, like shown in the figure below. In this specific case, are selected only the **label prod**, without selecting any group. It means that all the projects in the list have the **label prod** associated.

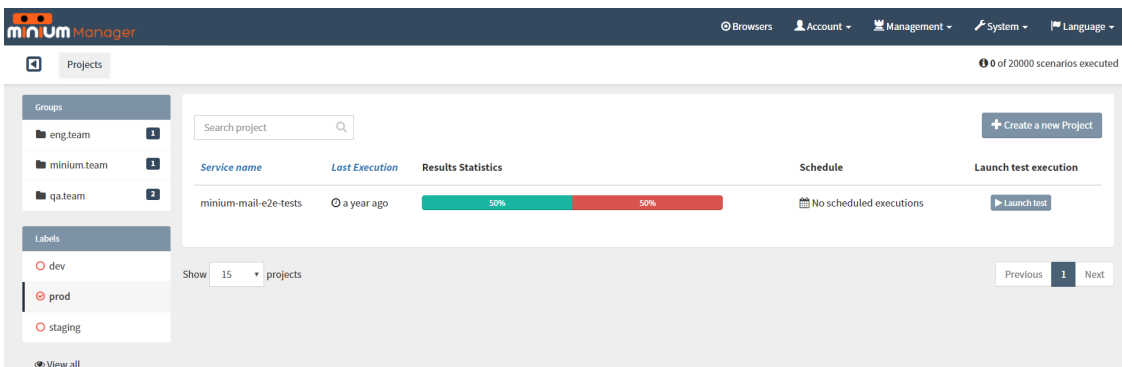

## Clean project filters

By clicking on the link **CLEAR ALL**, it will remove all the selected filter.

**Groups**

- eng.team 1
- minium.team 1
- qa.team 2

**Labels**

- dev
- prod
- staging

[View all](#)

## Project Type

We can filter the projects by its type. Select the project type(s) to filter the project list:

**Projects** 0 of 1000 scenarios executed

AUTO REFRESH: 1 Minute

Search project: [ ] Filter by result: Success Failing All

**FILTERS** (2 SELECTED) CLEAR ALL

- Project Type
  - Web application testing
  - Monitoring**
  - Cookie**

Service name	Last Execution	Results Statistics	Schedule	Launch test execution
test cookie report project	10 months ago	60% Success / 40% Failing	No scheduled executions	Launch test
test cookie crawler project	10 months ago	50% Success / 50% Failing	No scheduled executions	Launch test
blog.lacaixa	2 years ago	60% Success / 40% Failing	No scheduled executions	Launch test

Groups: eng.team (1), minium.team (1), qa.team (2)

Labels: dev, prod, staging


Show 15 projects

Previous 1 Next

## Auto Refresh

By default, the project page will be refreshed every minute. Also, you can configure the project page to refresh every 5 and 10 minutes.

To disable the auto refresh, just click on the link "AUTO REFRESH":

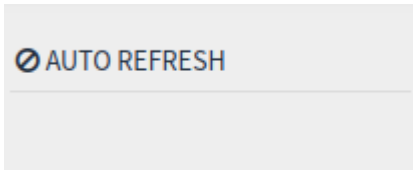


### Note:



The link "AUTO REFRESH" with the ban icon, means that is disabled; The link "AUTO REFRESH" with the check icon, means that is enabled.

## Filter by Results

Select the result status to filter the projects in the projects list:

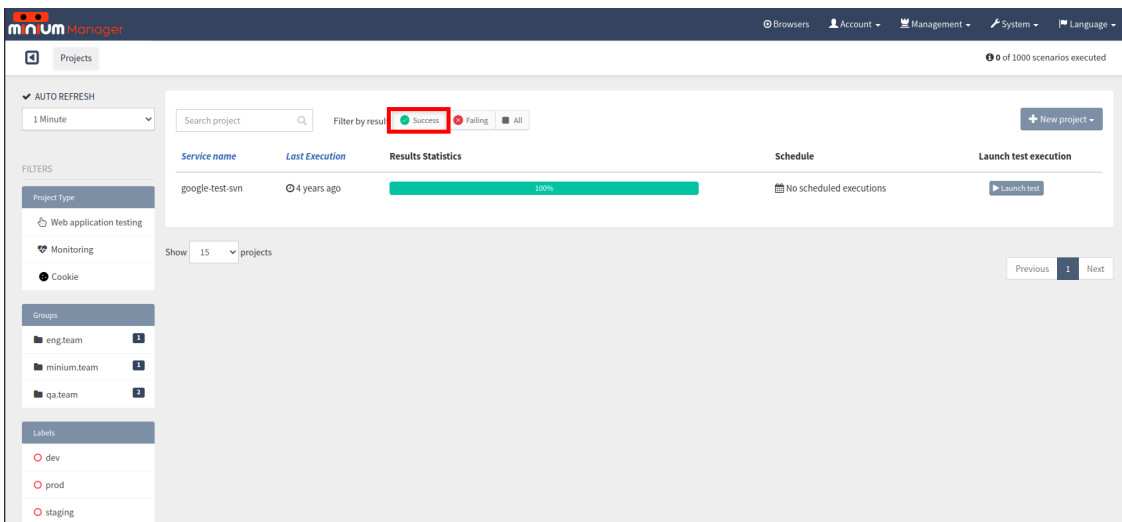

## 10.6. Configuration profiles


Configuration profiles can be defined on the `config/application.yml` of a project and used to load configuration properties that vary based on the environment being tested. Such a configuration could be for example the URL of the application or the language:

```
# default values
minium:
  config:
    baseUrl: http://localhost
    language: English
---
spring.profiles: qa
minium:
  config:
    baseUrl: http://staging
---
spring.profiles: es
minium:
  config:
    language: Spanish
```

These configuration properties can then be used on the step definitions like this:

```
When(/^I go to the homepage"$/, function() {
  browser.get(config.baseUrl);
  $(".dropdown").withText("Language").click();
  $(".dropdown a").withText(config.language).click();
});
```

Then to run test executions with the configuration properties of a profile, go to **Project Configurations** and add it to **Additional profiles**:

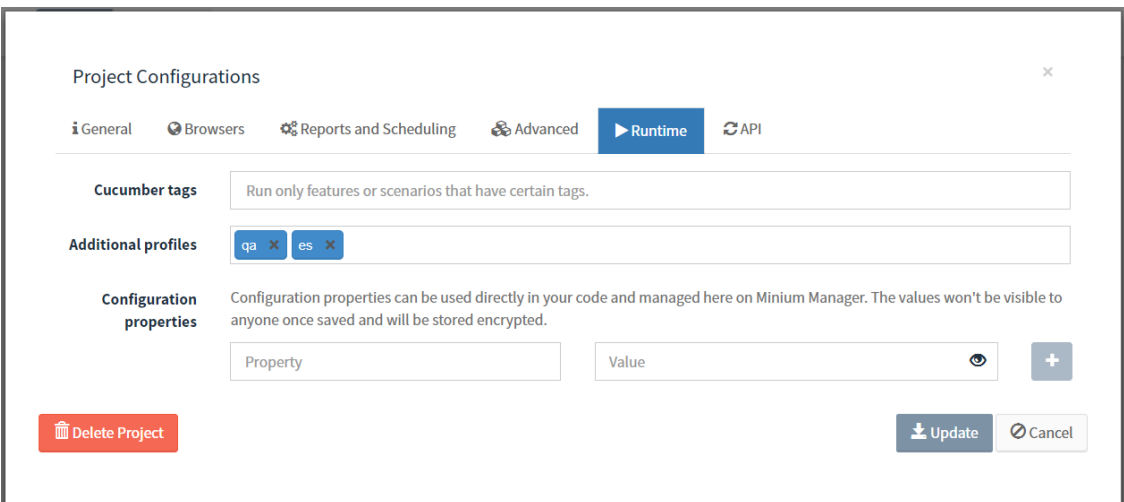

## 10.7. Secret configuration properties


Sensitive configuration properties that cannot be included on the repository of the tests can be safely stored on Minium Manager. They can be used just like the configuration properties defined on the `config/application.yml` file of the project. As an example, consider that some tests need to be executed against a production environment which requires a password that cannot be exposed on the code. In that case, only the password to be used on the test environment would be defined on the `config/application.yml` file:

```
minium:  
  config:  
    baseUrl: http://staging  
    username: test  
    password: minium  
  
---  
spring.profiles: prod  
  
minium:  
  config:  
    baseUrl: https://production  
    username: admin
```

Which would be accessible through the `config.password` during the tests:

```
When(/^I login"$/, function() {  
  browser.get(config.baseUrl);  
  $("text").fill(config.username);  
  $("password").fill(config.password);  
  $("submit").click();  
});
```

The password to be used on the production environment would then be defined on the Project Configurations:

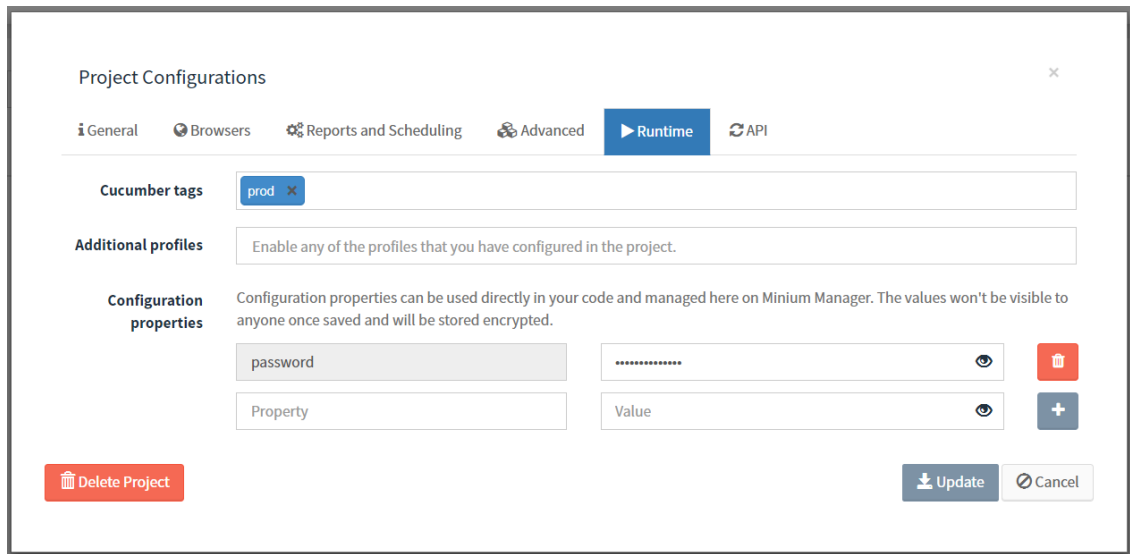

## 10.8. Add test information to Minium Manager Report (output)

We can add information of the test execution to the Minium Manager report by adding a simple minium instruction to the code of the Minium Project.

By add the minium expression `scenario.write(...)`; we are able to pass data to the Minium Manager report. E.g.:


```
Given(/^I open the site "([^"]*)"$/, function(url) {
  browser.get(url);
  scenario.write(browser.getCurrentUrl());
  scenario.embed(browser.screenshot().asBytes(), "image/png");
});
```

The previous script will generate the following output in the Minium Manager console:

Steps

- 1 Given I open the site "https://www.caixabank.es/apl/localizador/caixamaps/index\_es.html" Success


Output(s):  
https://www2.caixabank.es/apl/localizad...

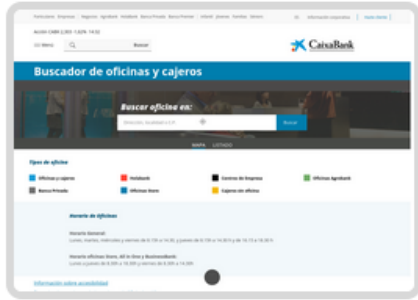

On the PDF report:


Given I open the site  
"https://www.caixabank.es/apl/localizador/caixamaps/index\_es.html"

Output(s):  
https://www2.caixabank.es/apl/localizador/caixamaps/index\_es.html

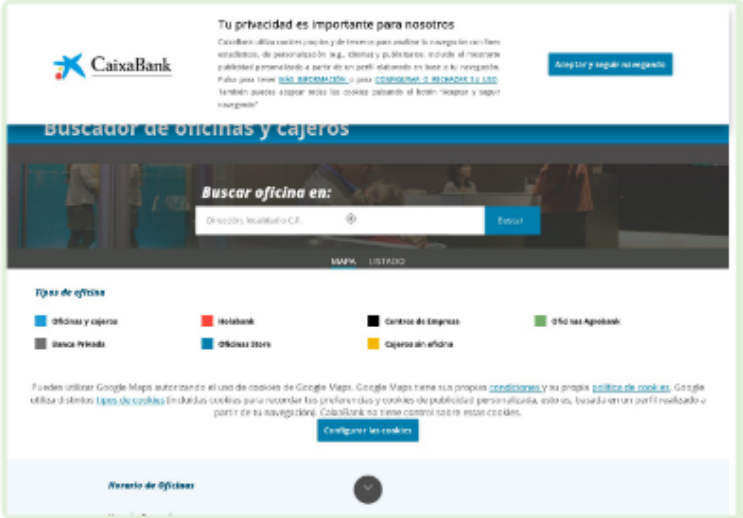


## 10.9. Delete a project

To delete a project, go to the project **configurations** and click on the button `Delete Project`, at the bottom-left corner:

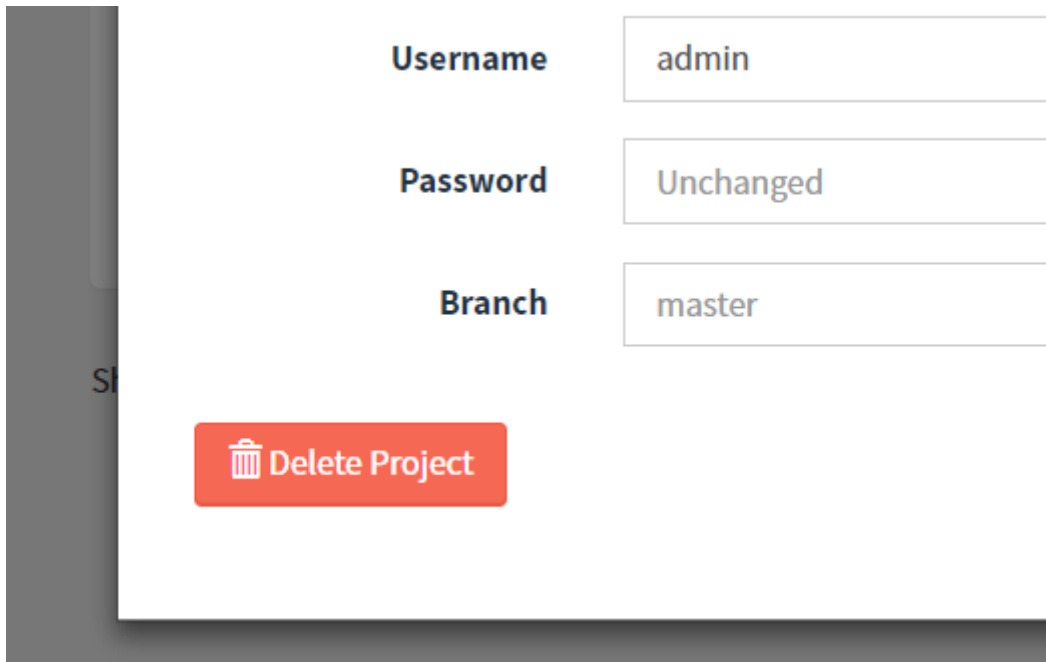


The screenshot shows a configuration form with three input fields and a button. The fields are labeled 'Username', 'Password', and 'Branch'. The 'Username' field contains the text 'admin', the 'Password' field contains 'Unchanged', and the 'Branch' field contains 'master'. Below these fields is a red button with a trash icon and the text 'Delete Project'.

Username	admin
Password	Unchanged
Branch	master



## 11. Check the available browsers

To check the available browsers, click on `Browsers`, at the navigation bar.

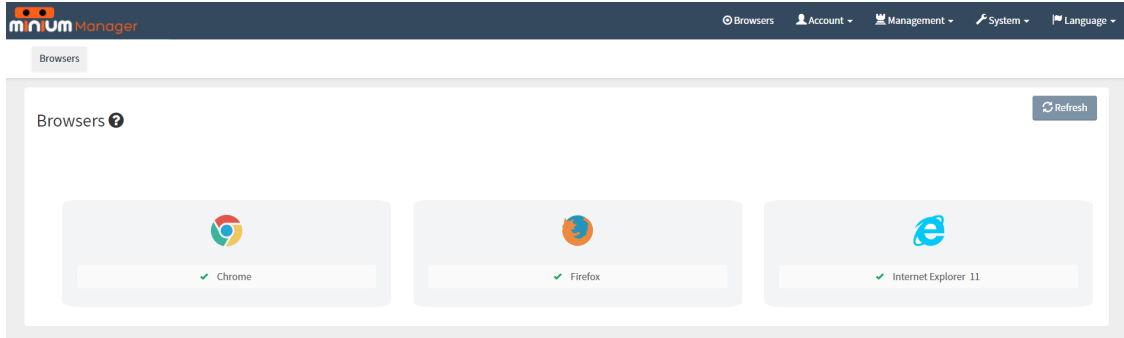


In the figure above, we only have one provider available, but we can have two or more providers configured (e.g. "BrowserStack" and/or "Selenium Grid Extras"). The provider configured has the browsers Chrome, Firefox and Internet Explorer available.


This means that with this environment is able to run the tests in Chrome, Firefox and Internet Explorer at the provider configured.

## 12. Project Statistics

Evolution chart to the test executions of a project.

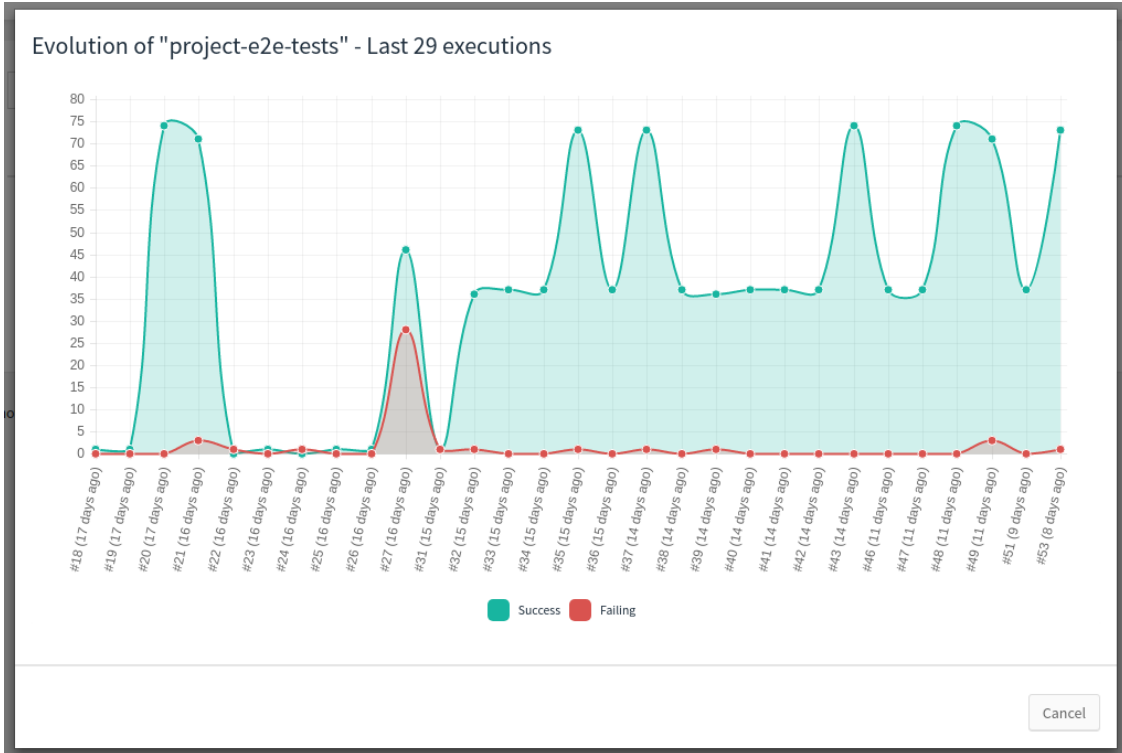

Statistics for a single execution.

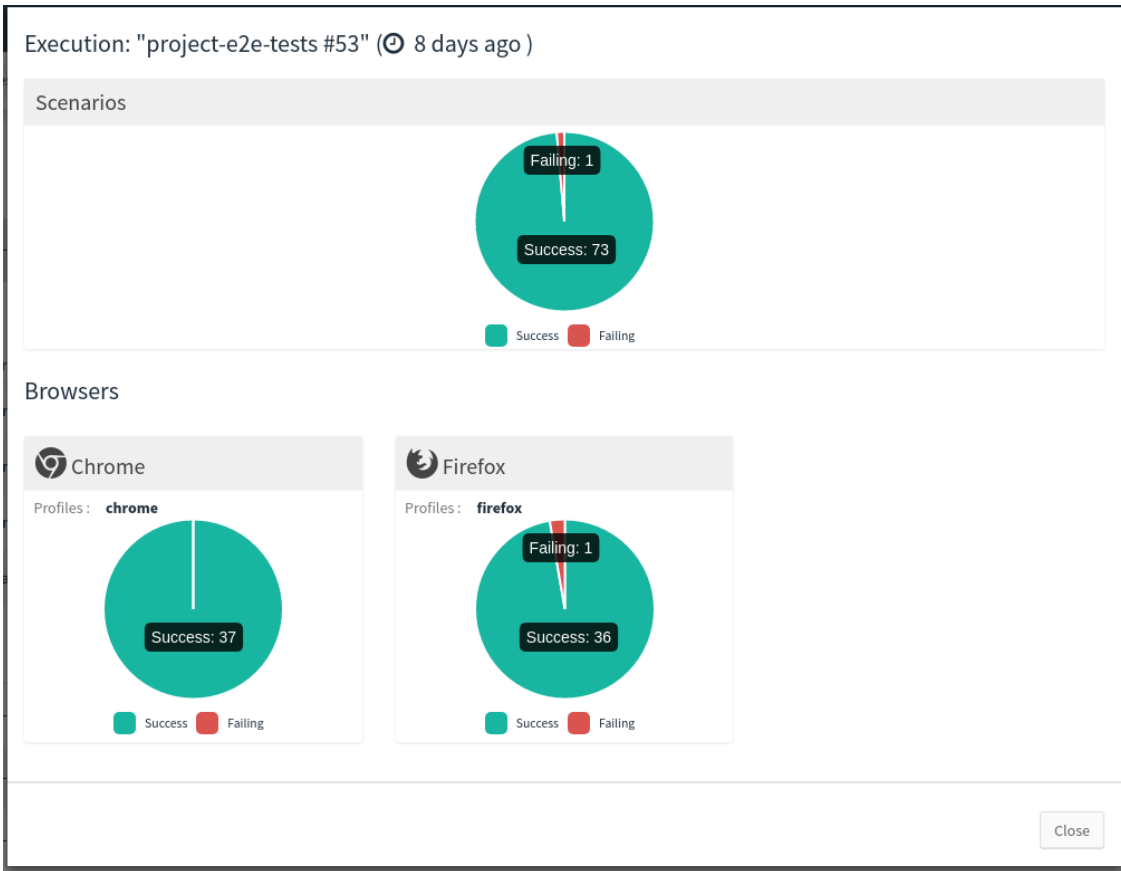


## 13. Test executions

### 13.1. Launch test executions

A test execution will execute the tests present in a project on one or more different browsers. There are alternative ways for launching test executions.

#### 13.1.1. Launch a test execution manually


On the homepage or the page of a project, click on button `Launch test`, which opens a modal for selecting the browsers.

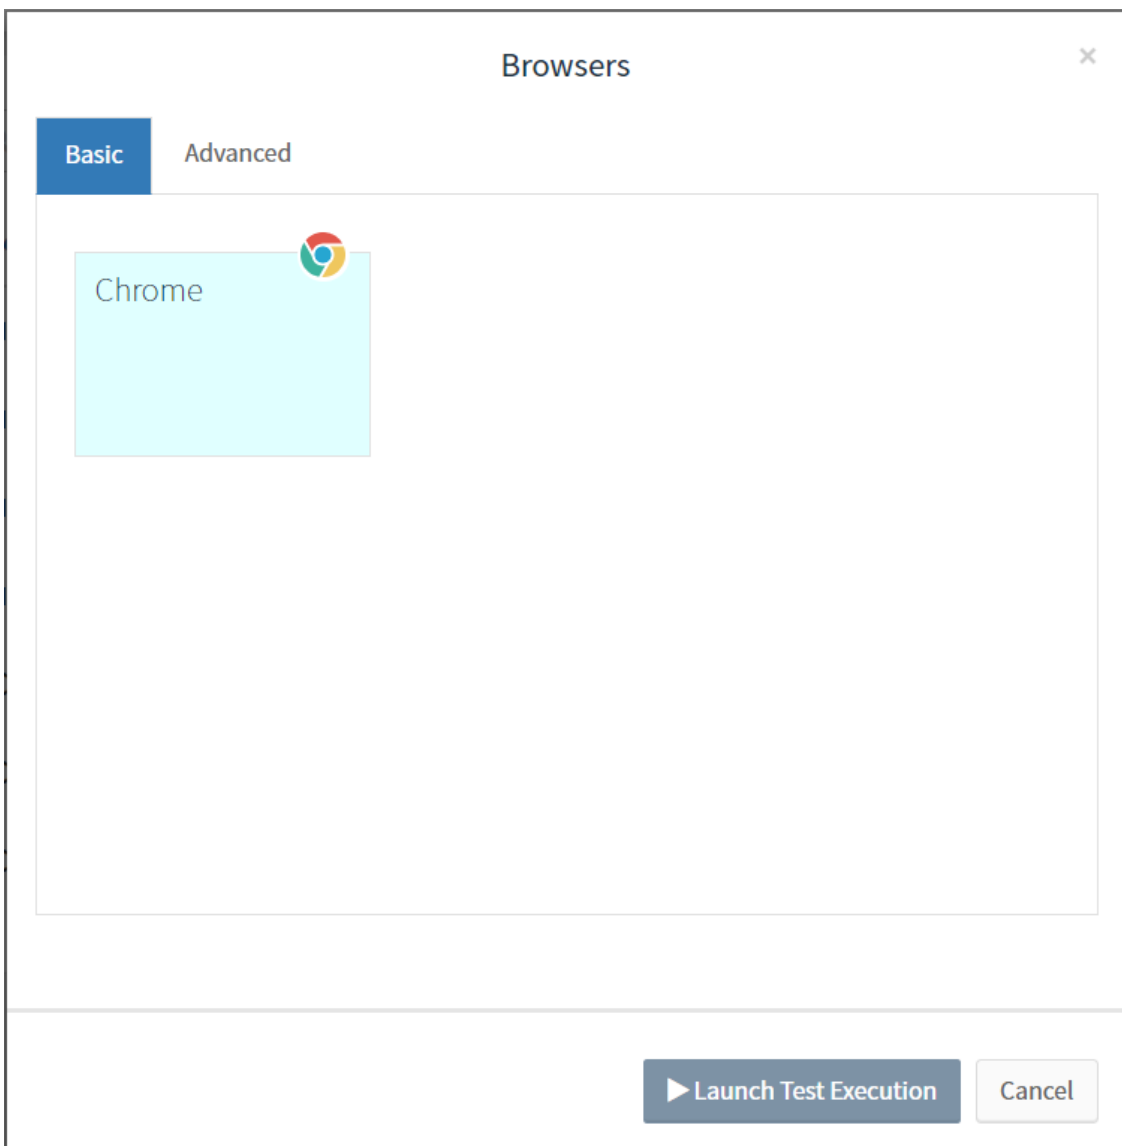

Select the desired browsers by clicking on them. If needed, click on `Add more browsers` to expand the available browsers and select a browser (and the properties) and/or the mobile devices (emulated via chrome).

After, click `Add browser` or `Add device` (for mobile devices).

Then, click on `Add browser`.

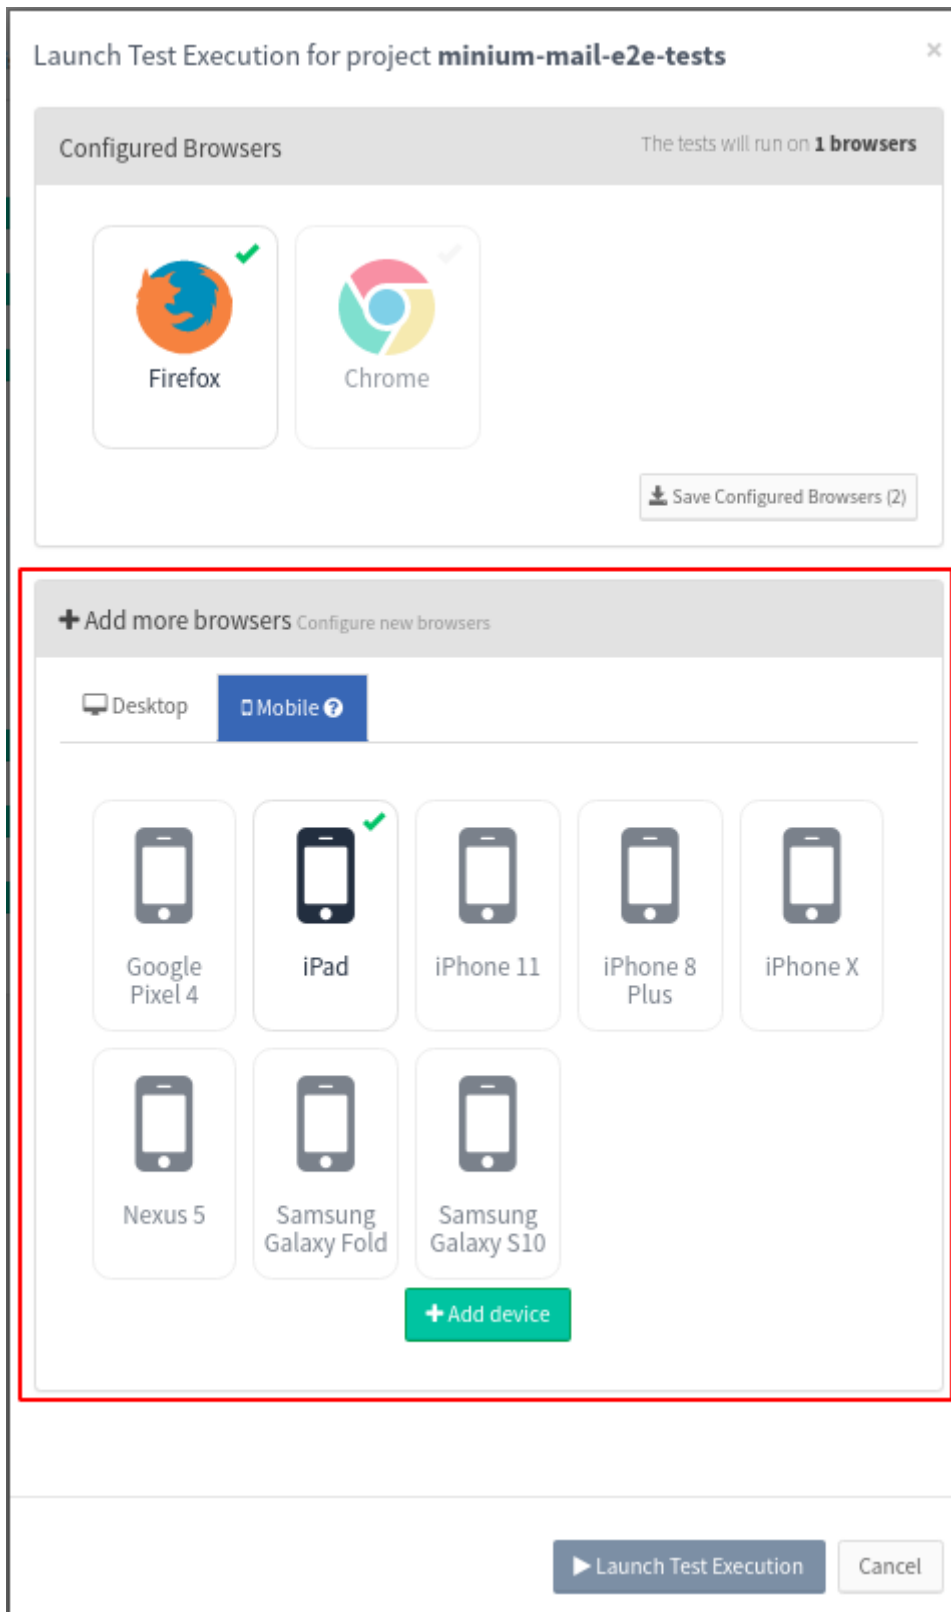

The new browser is now available to be selected on the `Configured Browsers`.

To save the current browser(s) configured to the project configurations, click `Save Configured Browsers` to persist the browser configured. Next time you open the launch modal it will show the `Configured Browsers` saved. Also, the executions created by the scheduler, will use the configuration saved.

After selecting all the browsers, click on `Launch Test Execution`.




**Note:**


At the click on button `Launch test`, the Monitoring and Cookie projects don't open a modal for selecting the browsers. It launches a test immediately.

### 13.1.2. Schedule test executions

Go the configurations of a project and open the `Browsers` tab to see the currently configured browsers.

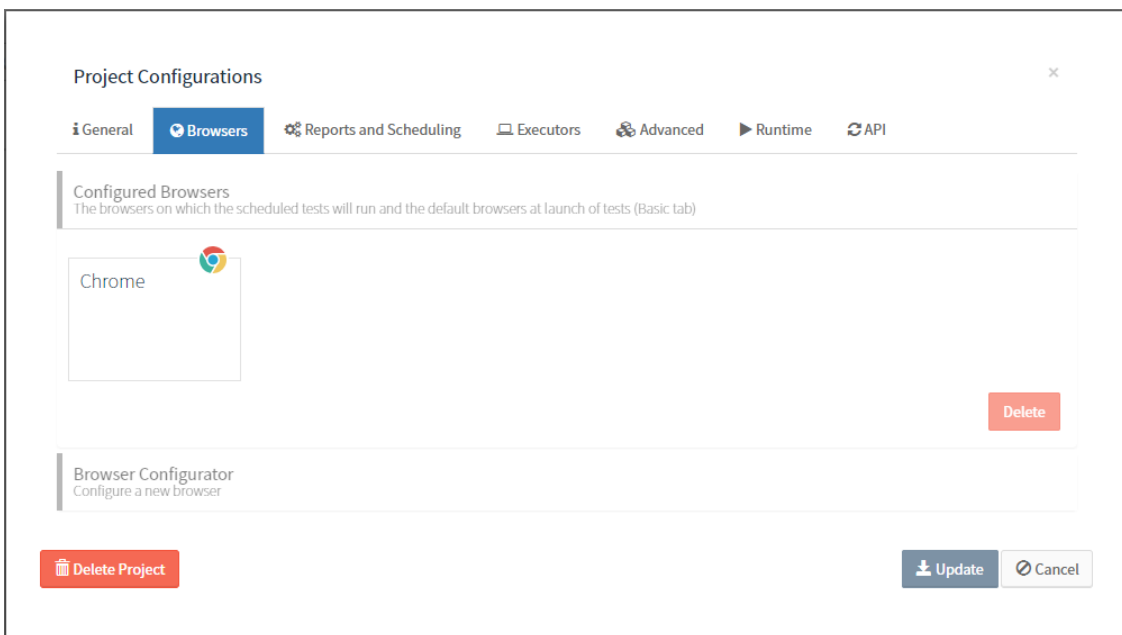

Click on `Add more browsers` and add more browsers if needed.

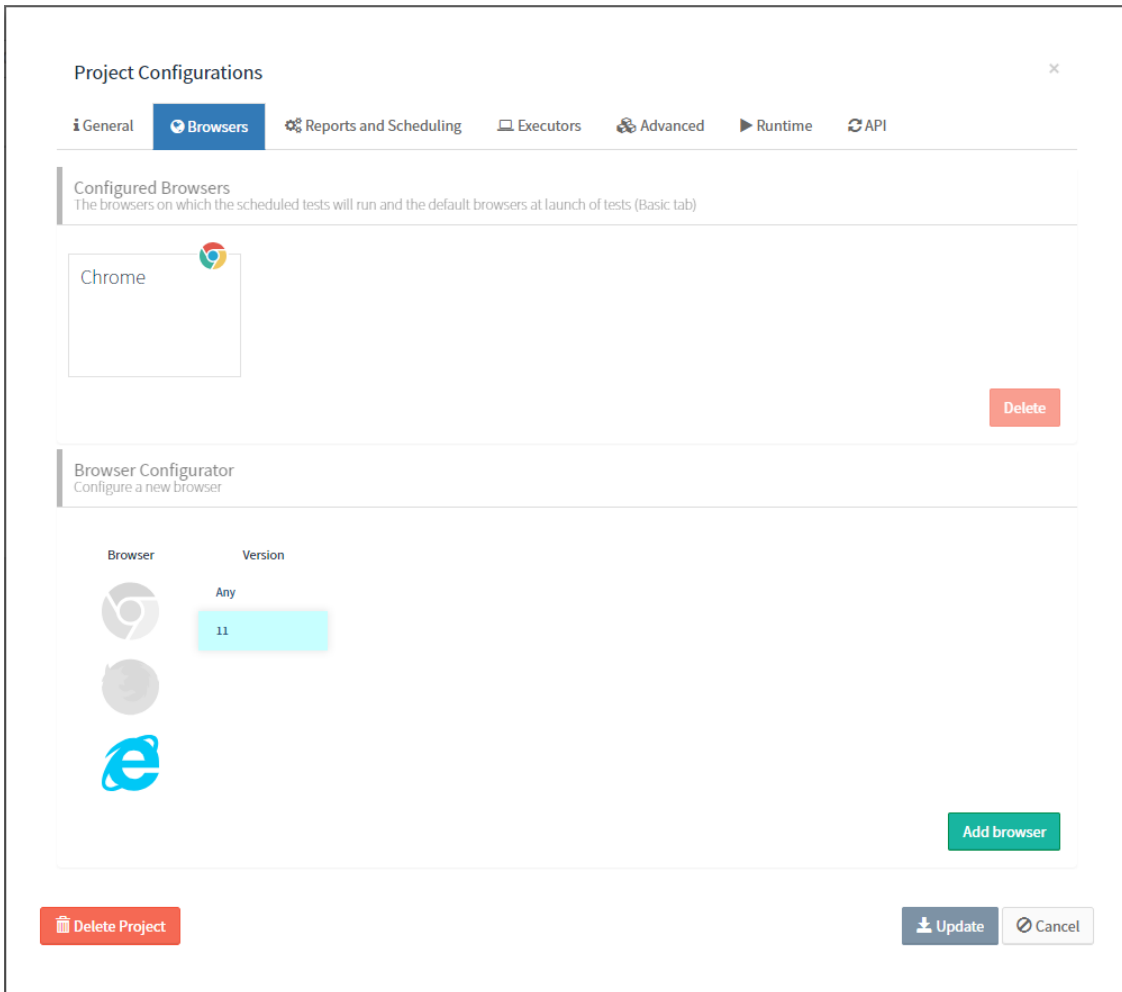




**Project Configurations**

General | **Browsers** | Reports and Scheduling | Executors | Advanced | Runtime | API

**Configured Browsers**  
The browsers on which the scheduled tests will run and the default browsers at launch of tests (Basic tab)

Chrome [Delete]

**Browser Configurator**  
Configure a new browser

Browser	Version
	Any
	11
	

[Add browser] [Delete Project] [Update] [Cancel]

To schedule test executions on the configured browsers, switch to the `Reports and Scheduling` tab.

**Scheduler**


Never run
  Every Day
  Every Week
  Every Month
  Every Day at midnight
  Custom

**Scheduler Custom Configurations**


Every:  at  :

### 13.1.3. REST API

Minium Manager provides a REST API through which it is possible to launch test executions and get test results. In order to use it, an API key is required. API key are specific of a project. To generate a key, go to the `API` tab on the configurations of a project and click on the `Generate` button.

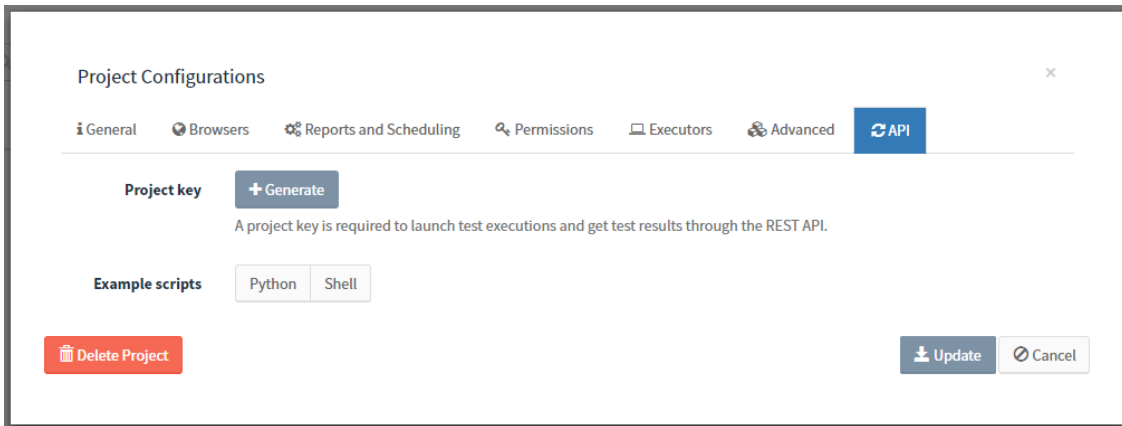

Also, on the `API` tab are some example scripts. Once the project has an API key, the scripts will be fulfilled with the project-specific data and ready to use. The first part of the script shows how to launch a test execution.

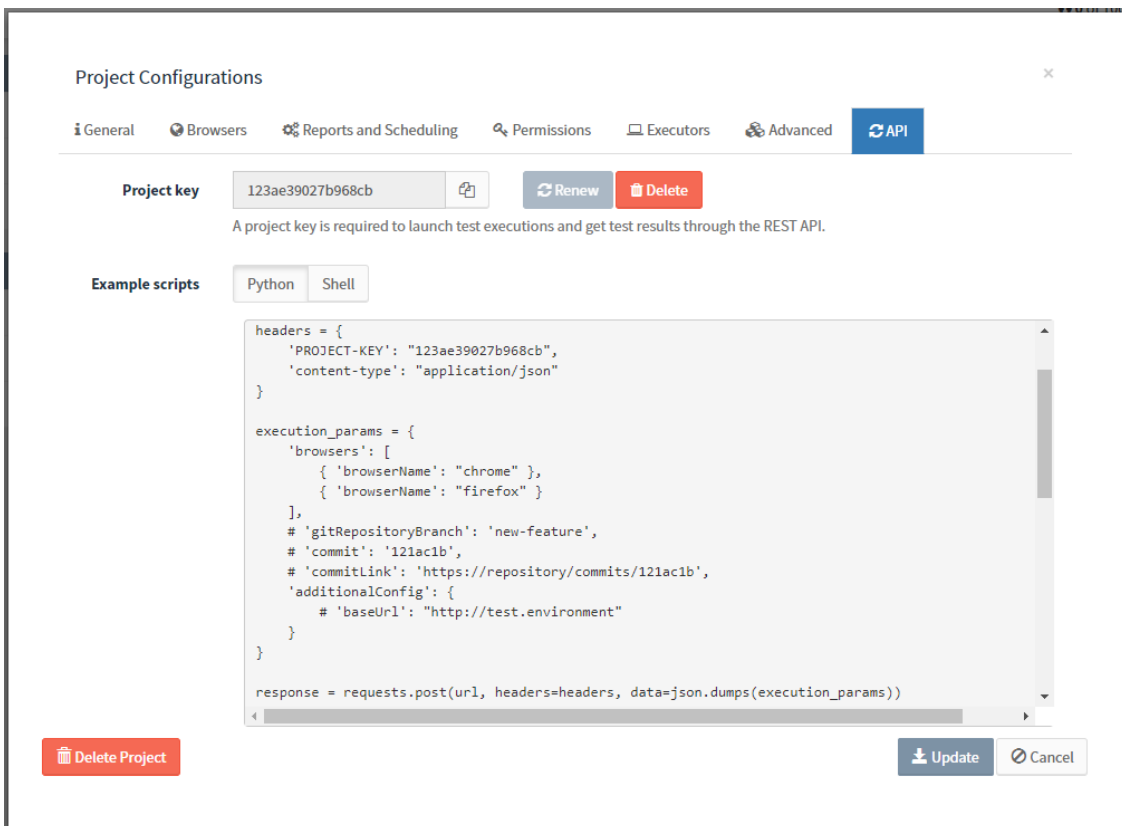

A test execution can be launched by issuing a `POST` request to `api/projects/<PROJECT-ID>/test-executions` containing the `PROJECT-KEY` header set to the project key, and the `content-type` header set to `application/json`. The execution parameters are sent in JSON on the request body:

- **browsers**: list containing the capabilities of the browsers. Only the `browserName` is mandatory.
- **additionalConfig** (optional): configuration properties to be merged with the ones on the `application.yml` file of the project. Properties already defined on the

`application.yml` file are overridden.

- **gitRepositoryBranch** (optional): branch of the repository of the tests.
- **commit** (optional): the corresponding commit of the system under test, to be then included on the report of the execution.
- **commitLink** (optional): link to directly access the commit from Minium Manager.

To follow the progress of the execution until it finishes, poll the URL returned on the `Location` header of the response to the `POST` request.

```
url = response.headers['location']
response = requests.get(url, headers=headers)
while response.status_code == 404:
    time.sleep(5)
    response = requests.get(url, headers=headers)
if not response.ok: sys.exit(response.text)

execution = response.json()
while execution['state'] != "FINISHED":
    time.sleep(15)
    execution = requests.get(url, headers=headers).json()
```

While the tests are running, the response will be a JSON object containing the `state` field set to `RUNNING`, the name of the current browser and the corresponding progress in percentage, number of passed/failed and last finished feature/scenario. Example:


```
{
  "state": "RUNNING",
  "browser": "chrome",
  "progressInPercentage": 18,
  "failingScenariosCount": 1,
  "passingScenariosCount": 5,
  "feature": "Login",
  "scenario": "Successful login"
}
```

Once the execution finishes, the response will have `state FINISHED`, the global results and the number of passed/failed scenarios for each browser. Example:

```
{
  "state": "FINISHED",
  "globalResults": {
    "totalScenarios": 20,
    "percentageOfPassingScenarios": 95,
    "passingScenarios": 19,
    "failingScenarios": 1
  },
  "browserResults": [
    {
      "browser": {
        "browserName": "chrome"
      },
      "passedScenarios": 10,
      "failedScenarios": 0
    },
    {
      "browser": {
        "browserName": "firefox"
      },
      "passedScenarios": 9,
      "failedScenarios": 1
    }
  ]
}
```


## 13.2. Follow the progress of a test execution

After launching a test execution, follow the progress in the project page. See the browser where the test is executing, the percentage, number of executed tests, the elapsed time and the test that is currently executing.

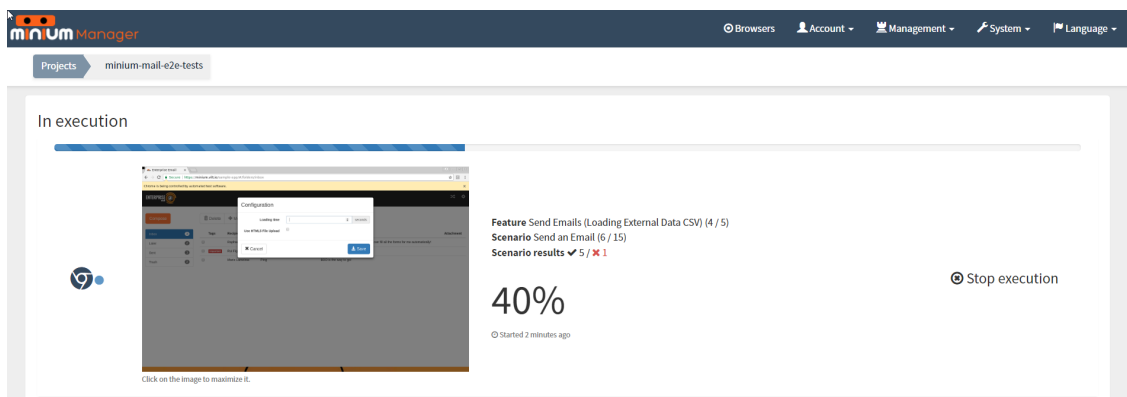

## 14. Monitor test results

In a project page, all the launched executions are showed:

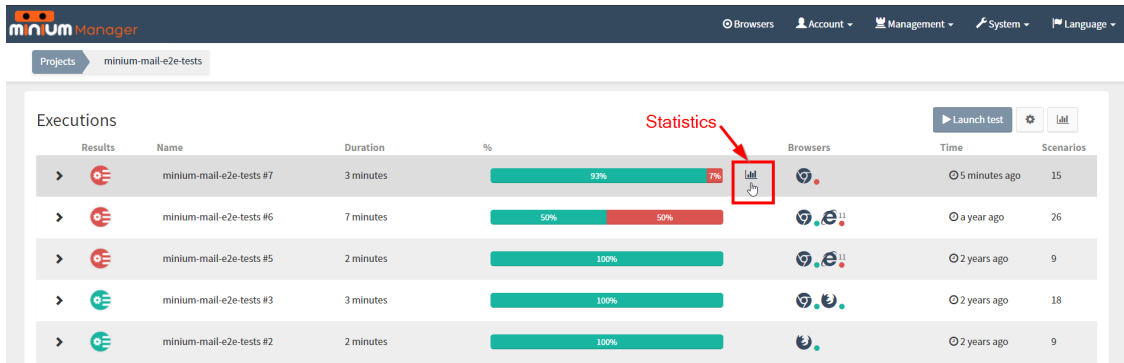


Results	Name	Duration	%	Browsers	Time	Scenarios
>	minium-mail-e2e-tests #7	3 minutes	93% <span style="color: red;">7%</span>	🌐	🕒 5 minutes ago	15
>	minium-mail-e2e-tests #6	7 minutes	50% <span style="color: red;">50%</span>	🌐 🌐	🕒 a year ago	26
>	minium-mail-e2e-tests #5	2 minutes	100%	🌐 🌐	🕒 2 years ago	9
>	minium-mail-e2e-tests #3	3 minutes	100%	🌐 🌐	🕒 2 years ago	18
>	minium-mail-e2e-tests #2	2 minutes	100%	🌐	🕒 2 years ago	9

For each execution it can be seen:

- result of the execution
- name
- duration of execution
- percentage of passed and failing scenarios
- statistics of the execution (shown when the mouse is over the execution)
- browser where the execution ran
- launch time
- number of scenarios of the execution

When expands a test execution a list of executed features, and their results can be seen:

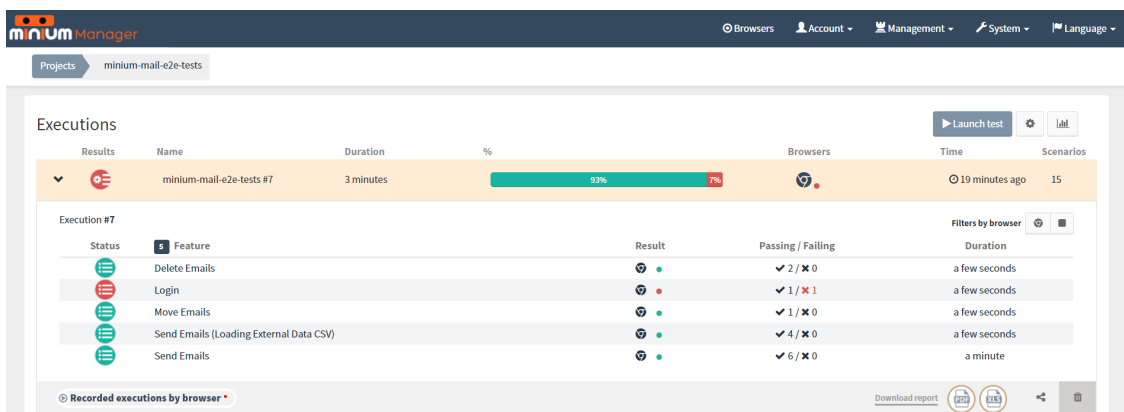


Status	Feature	Result	Passing / Failing	Duration
🟢	Delete Emails	🟢	✓ 2 / ✗ 0	a few seconds
🟢	Login	🟢	✓ 1 / ✗ 1	a few seconds
🟢	Move Emails	🟢	✓ 1 / ✗ 0	a few seconds
🟢	Send Emails (Loading External Data CSV)	🟢	✓ 4 / ✗ 0	a few seconds
🟢	Send Emails	🟢	✓ 6 / ✗ 0	a minute

For the execution expanded it can be seen:

- features tested
- the results detailed for each feature (with filters)
- videos of the execution

- download the report of the executions (MS excel and PDF)
- remove execution

Click at "Recorded executions by browser" to see the videos of the recorded executions:

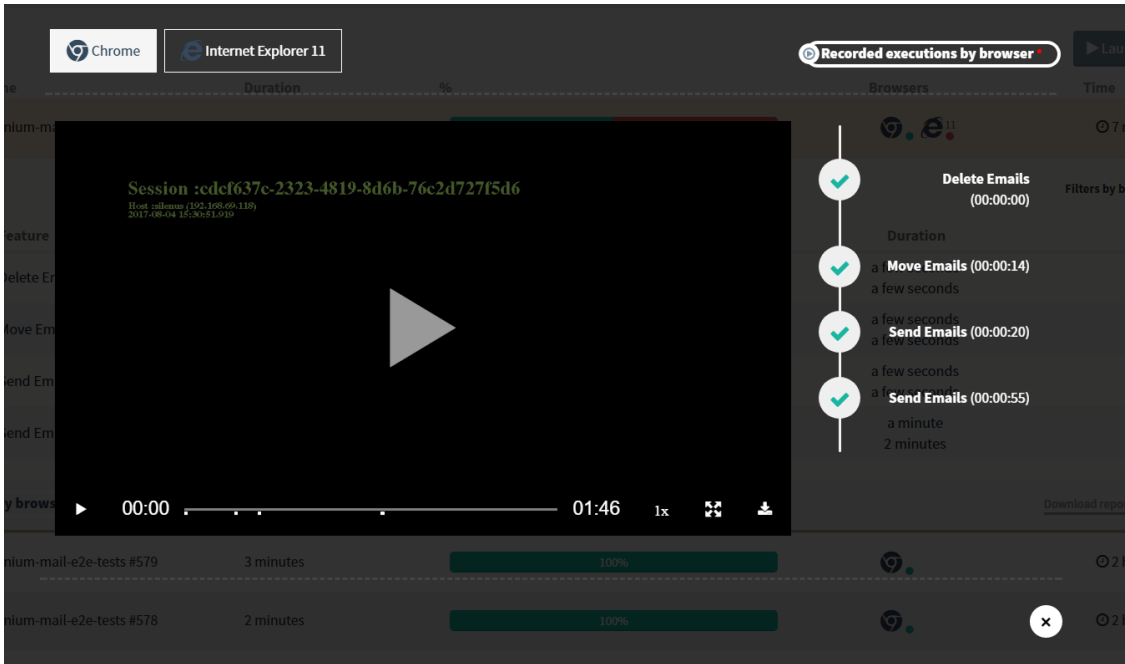


For the videos (at execution) it can be seen:

- videos for the browsers tested
- features to navigate through the video
- cue points when the feature starts on the video

### Monitoring project

The result of an execution of a Monitoring project is presented at the execution page:

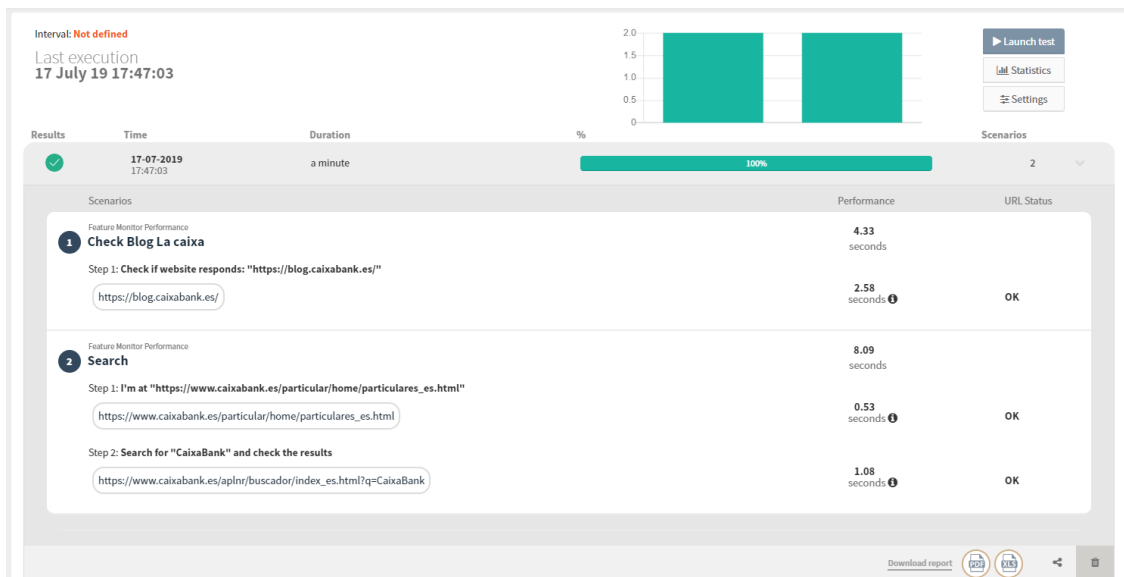


At execution page, we can see the time of each URL took to load. Also, we can see the URL status, and the time it took to execute the scenario.

### Display options

The information at the execution page can be filtered to show/hide some details.

To open the `Display options` click at `Settings`:

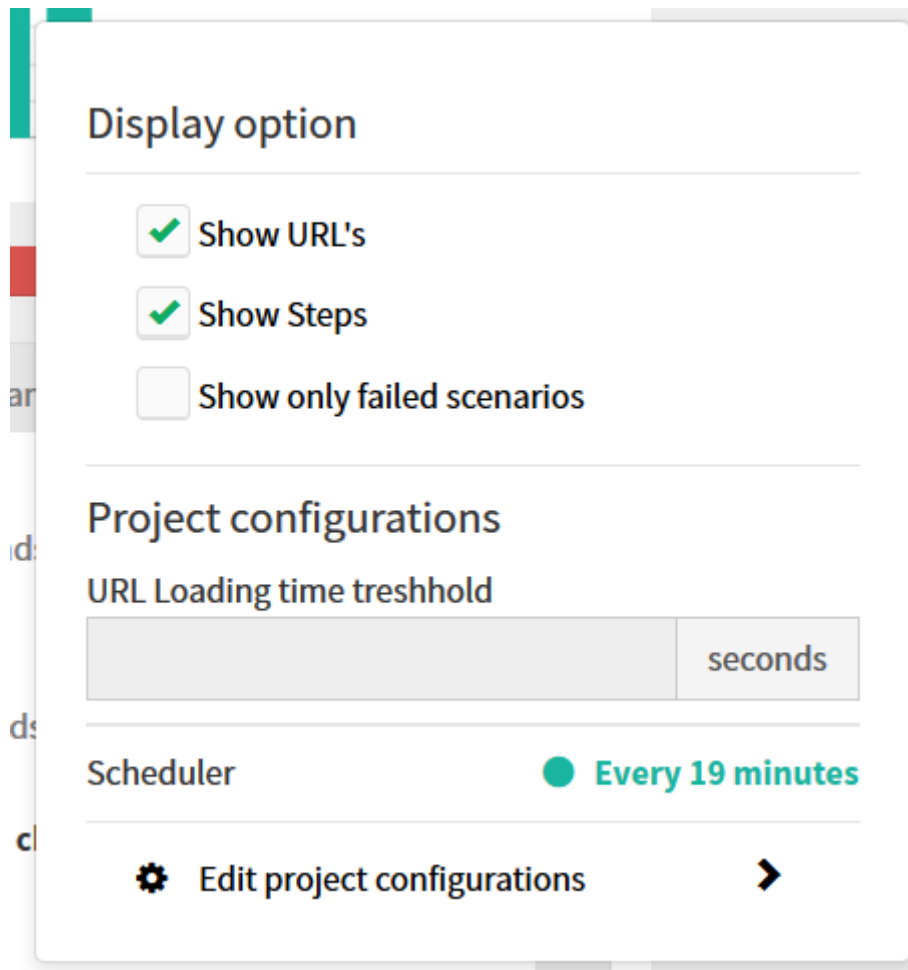

The display options allow us to:


- Show/Hide the URL's
- Show/Hide the steps
- Show only the failed scenarios
- Consult the URL loading time threshold (This property is configured at the project configurations at the advanced tab and warns the user (at the execution page) when the loading time of a URL is higher than the loading time threshold)
- Consult the scheduler (The scheduled is configured at the project configurations at the reports and scheduling tab)

### Cookie project

The Cookie project is divided in two projects: Cookie Report project and Cookie Crawler project.

### Cookie Report project

The result of an execution of a Cookie Report project is presented at the execution page:

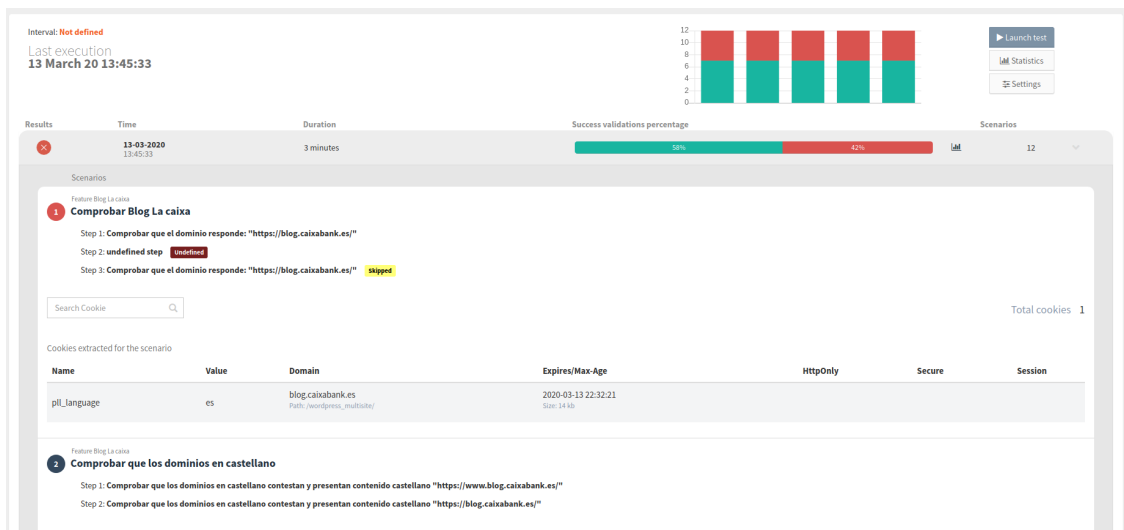

Interval: **Not defined**  
Last execution: 13 March 20 13:45:33

Results: 13-03-2020 13:45:33 | Duration: 3 minutes | Success validations percentage: 58% (58%) / 42% (42%) | Scenarios: 12

Scenario 1: **Comprobar Blog La caixa**  
 Step 1: Comprobar que el dominio responde: "https://blog.caixabank.es/"  
 Step 2: **undefined step** (undefined)  
 Step 3: Comprobar que el dominio responde: "https://blog.caixabank.es/" (skipped)

Search Cookie: [ ] Total cookies: 1

Name	Value	Domain	Expires/Max-Age	HttpOnly	Secure	Session
ptL_language	es	blog.caixabank.es <small>Path: /wordpress_multisite/</small>	2020-03-13 22:32:21 <small>Size: 14 kb</small>			


Scenario 2: **Comprobar que los dominios en castellano**  
 Step 1: Comprobar que los dominios en castellano contestan y presentan contenido castellano "https://www.blog.caixabank.es/"  
 Step 2: Comprobar que los dominios en castellano contestan y presentan contenido castellano "https://blog.caixabank.es/"

At execution page, we can see at the end of each scenario a table (with a filter) of all browser cookies at the end of a scenario.

## Display options

The information at the execution page can be filtered to show/hide some details.

To open the `Display options` click at `Settings`:

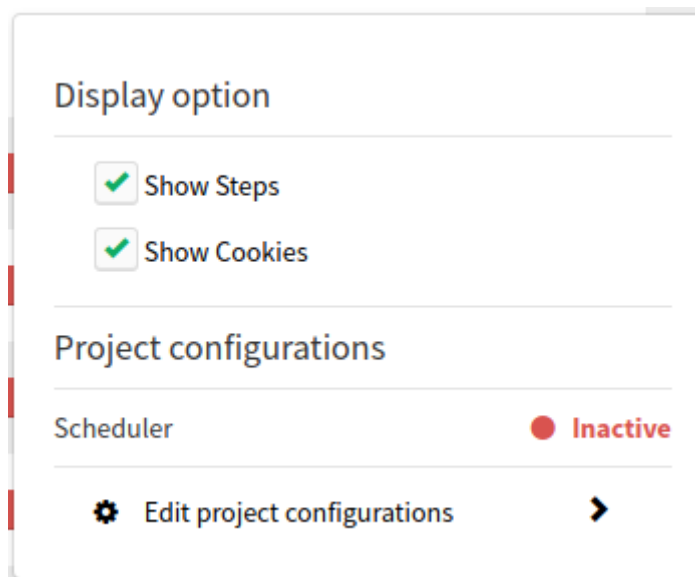

**Display option**

- Show Steps
- Show Cookies

**Project configurations**

Scheduler ● Inactive

Edit project configurations

The display options allow us to:

- Show/Hide the steps
- Show/Hide the cookies table
- Consult the scheduler (The scheduled is configured at the project configurations at the reports and scheduling tab)

## Cookie Crawler project


The Cookie Crawler project generates a report of the all browser cookies found during the crawl of the websites.

For each execution it can be seen:

- URL crawler - The URL(s) that was crawled
- Filters - Domains filtered
- Cookies Accepted - Tells whether the cookie warning was accepted or not
- Cookies to validate - Cookies validated during the crawl (click at the eye to see the validations in a table)
- Max Depth - Depth of the crawl
- Validation failed - The cookies not found at the report
- Total Cookies (Distinct by name) - Number of different cookies found at the report distinct by name
- Total cookies - Number of different cookies found at the report
- Total URLs - Number of different URLs crawled

There are several tabs to present execution information: Summary, Cookie table and URLs tree.


### Summary:

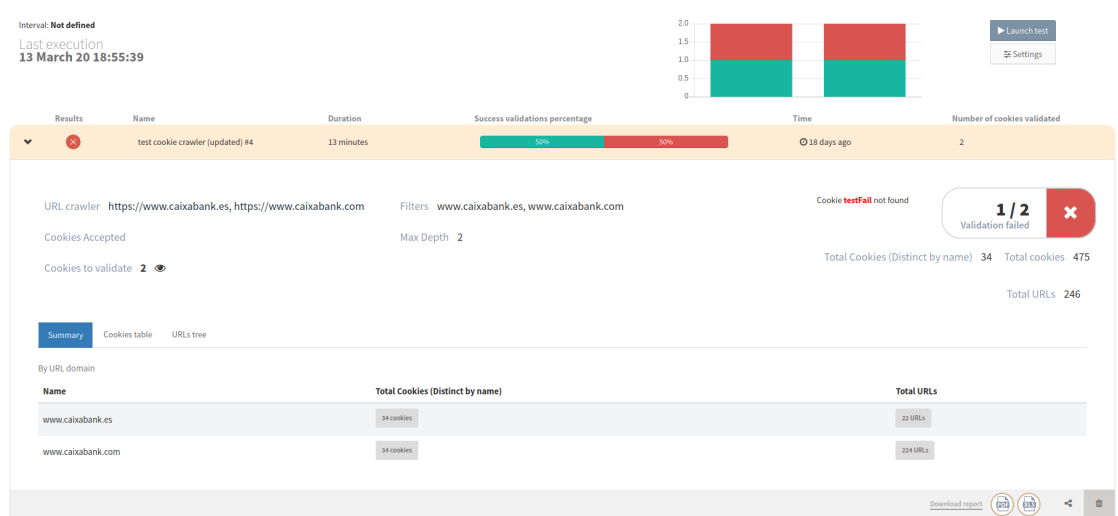

This table presents the information By URL domain.

For the screenshot above we can see that for the domain `www.caixabank.es`, we found 34 cookies (Distinct by name) in a total of 22 URLs.


### Cookie table:

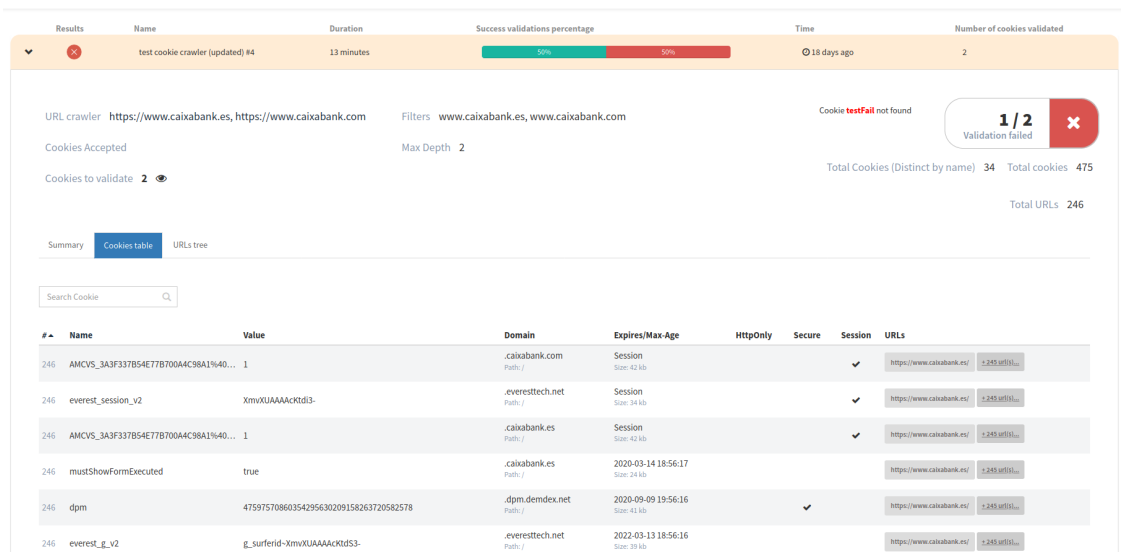

#	Name	Value	Domain	Expires/Max-Age	HttpOnly	Secure	Session	URLs
246	AMCVS_3A3F337B54E77B700A4C98A1%40...	1	.caixabank.com	Session Size: 42 kb			✓	https://www.caixabank.es/ +245 urls...
246	everest_session_v2	XmvXUAAAACKd3-	everesttech.net	Session Size: 24 kb			✓	https://www.caixabank.es/ +245 urls...
246	AMCVS_3A3F337B54E77B700A4C98A1%40...	1	.caixabank.es	Session Size: 42 kb			✓	https://www.caixabank.es/ +245 urls...
246	mustShowFormExecuted	true	.caixabank.es	2020-03-14 18:56:17 Size: 24 kb				https://www.caixabank.es/ +245 urls...
246	dpm	47597570860354295630209158263720582578	dpm.demdex.net	2020-09-09 19:56:16 Size: 11 kb		✓		https://www.caixabank.es/ +245 urls...
246	everest_g_v2	g_surferid-XmvXUAAAACKd3-	everesttech.net	2022-03-13 18:56:16 Size: 29 kb				https://www.caixabank.es/ +245 urls...

This table presents the all the cookie's information retrieved at the crawler for the URL(s) crawled, and the URL(s) where the cookie was found.

### URLs tree:

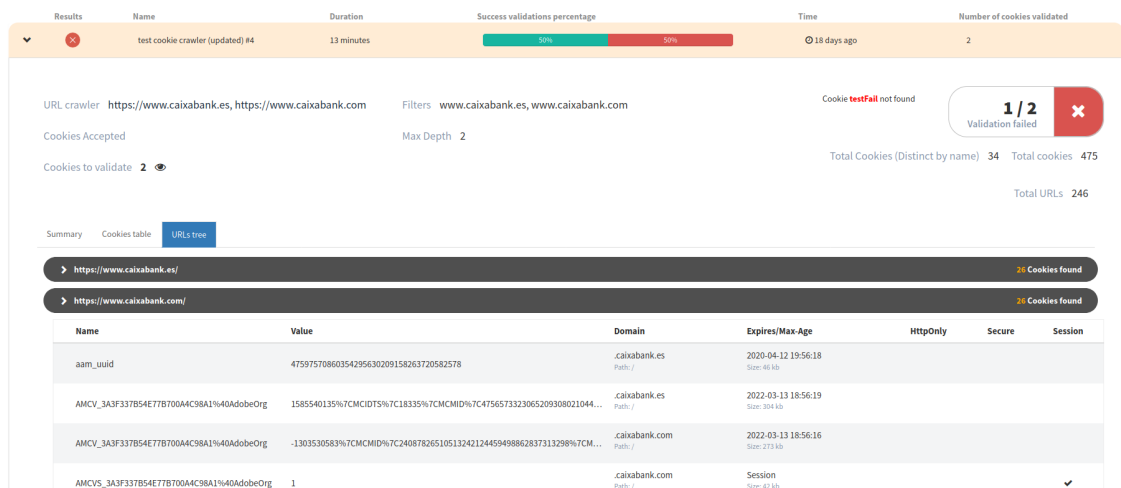

Name	Value	Domain	Expires/Max-Age	HttpOnly	Secure	Session
aam_uid	47597570860354295630209158263720582578	caixabank.es	2020-04-12 19:56:18 Size: 46 kb			
AMCV_3A3F337B54E77B700A4C98A1%40AdobeOrg	1585540135%7CMCIDTS%7C18335%7CMCMID%7C4756573323065209308021044...	.caixabank.es	2022-03-13 18:56:19 Size: 394 kb			
AMCV_3A3F337B54E77B700A4C98A1%40AdobeOrg	-1303530583%7CMCMID%7C24087826510513242124459498862837313298%7CM...	caixabank.com	2022-03-13 18:56:16 Size: 273 kb			
AMCVS_3A3F337B54E77B700A4C98A1%40AdobeOrg	1	.caixabank.com	Session Size: 42 kb			✓

This view shows the URLs tree generated by the crawl, with the cookies found for each URL.

### Display options

The information at the execution page can be filtered to show/hide some details.

To open the `Display options` click at `Settings`:

### Display option

---

Show new cookies only (Tree view)

Show all cookie information (Table view)

---

### Project configurations

Max Depth



Accept Cookies

Number of Validation(s)

---

Scheduler ● Inactive


---

 [Edit project configurations](#) 

The display options allow us to:

- Show new cookies only (Tree view) - Only shows the new cookies at the URLs tree in the child levels. The default is show every cookie (even the repeated ones).
- Show all cookie information (Table view) - Shows all the cookie information (this is the fields: domain, Expires/Max-Age, HttpOnly, Secure and Session). The default is to show the Name, Value and URLs aggregated.
- Max Depth - The Max depth configured at project configurations
- Accept Cookies - Shows if accept cookies are checked or not at project configurations
- Number of Validation(s) - Shows the number of validations configured at project configurations
- Consult the scheduler (The scheduled is configured at the project configurations at the reports and scheduling tab)

On the feature (for web application testing) view check the scenarios of this particular feature:

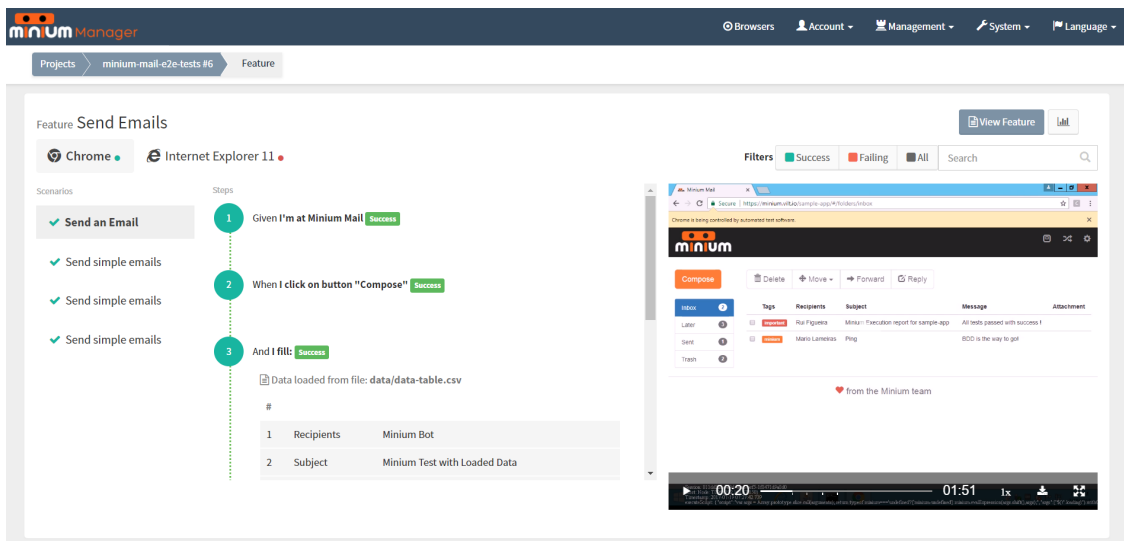


When expands a scenario see all the steps and results. Is easily switch to the results of another browser. More functionalities:

- **Screenshots** - Minium Manager provides screenshots of the application at the moment of the failure. So it is possible to see the state of the application in the moment of failure.
- **Error messages**
- **Links to the feature or step file for each step.**
- **Evolution chart for the projects**
- **Video with the cue points when the scenarios start**

## Monitoring project

Feature page of a Monitoring project scenario:

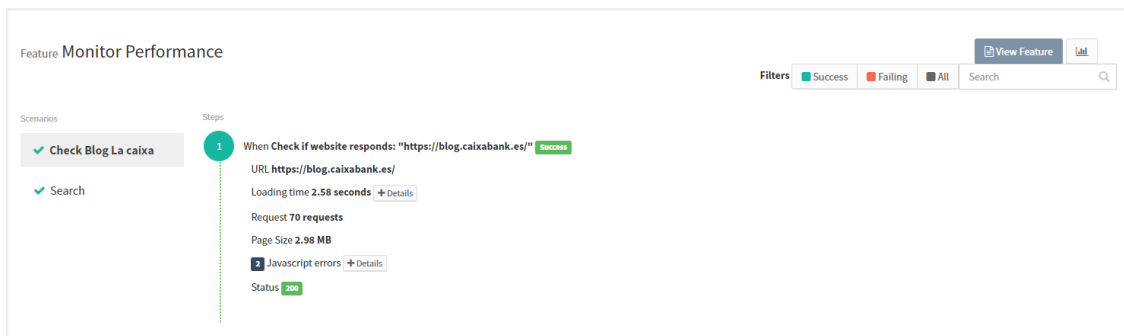

At the feature page, we can see more details about the page load performance:

- The url loaded
- The loading time with the times of the Backend Performance, Frontend Performance and DOM Content Loading
- The number of requests
- The Javascript Errors (if any)

- The URL status code

## Cookie project

Feature page of a Cookie Report project scenario:

Name	Value	Domain	Expires/Max-Age	HttpOnly	Secure	Session
pl1_language	es	blog.caixabank.es Path: /wordpress_multisite/	2020-03-13 22:32:21 Size: 14 kb			

We can see at the end of each scenario a table (with a filter) of all browser cookies.



### Note:

The Feature overview page is not available to the Cookie Crawler project.



## 14.1. Feature overview








Overview of all the features, by clicking on the button View Feature.

#	Recipients	Minium Bot
1	Recipients	Minium Bot
2	Subject	Minium Test with Loaded Data









View the result of each step in each browser that the feature ran.

### Delete Emails

Background:  
  Given I'm at Minium Mail

Scenario: Delete an email  
  Given an email with Subject "Minium Can!" exists  
  When I delete an email with Subject "Minium Can!"  
  And I navigate to section "Trash"  
  Then I should see an email with:

Subject	Minium Can!
Recipients	Minium Bot

Scenario: Delete an email from trash  
  Given I'm at section "Trash"  
  And an email with Subject "Phasellus vitae interdum nulla." exists  
  When I delete an email with Subject "Phasellus vitae interdum nulla."  
  Then I shouldn't see an email with:

Subject	Minium Can!
---------	-------------

Close

## 14.2. Reports


Receive the reports of each test execution, in `PDF` and/or `Excel` formats, via email. Alternatively, download them directly in Minium Manager. To choose the formats to receive via email, go to the configurations of the project and expand the advanced configurations:


### Emails

**Recipients** Email addresses to receive reports of the executions

Send only when there are test failures



**Report formats**

 PDF











 XLSX

To download a report, expand the results of a test execution and click in `Download report`:



#### Executions

Results	Name	Duration	%	Browsers	Time	Scenarios
	minium-mail-e2e-tests #7	3 minutes	93% <span style="color: red;">7%</span>		26 minutes ago	15

Execution #7

Status	Feature	Result	Passing / Failing	Duration
	Delete Emails		2 / 0	a few seconds
	Login		1 / 1	a few seconds
	Move Emails		1 / 0	a few seconds
	Send Emails (Loading External Data CSV)		4 / 0	a few seconds
	Send Emails		6 / 0	a minute

Download report

## 14.3. Daily Reports

The daily report is a custom report with your favorite projects that will be sent to your email with the status of the last completed execution in the last 24 hours.

Before being able to configure a daily report, first you need to set the email configured at [Account > Settings](#).



### Note:

If Minium Manager is using LDAP, please contact your administrator to set your email at LDAP.

To create a daily report configuration, open the [Account](#) menu and click on [Daily Reports](#).

Choose the projects to be included in your custom daily report:

Projects

Choose the projects to be included in your custom daily report.

Search for projects

<input type="checkbox"/>	Name ▾	Groups	Labels
<input type="checkbox"/>	authenticated_project		
<input type="checkbox"/>	google-test-git	<span>qa.team</span>	<span>staging</span>
<input type="checkbox"/>	google-test-svn		
<input type="checkbox"/>	minium-mail-e2e-tests	<span>minium.team</span> <span>eng.team</span> <span>qa.team</span>	<span>prod</span>
<input type="checkbox"/>	test		
<input type="checkbox"/>	test-jvm-project		
<input type="checkbox"/>	unauthenticated_project		

Show  Projects

Project(s) selected: Total selected: 0

None

After, schedule the time the email will be sent, with a summary of the past 24h.

### Scheduling


The report will be sent at the time you configure, with a summary of the past 24h.

Every:  at  :


Finally, click on the button "Create/Update Daily Report Configuration" to create/update the

## daily reports:

Daily report of the past 24h (with errors) Inbox x

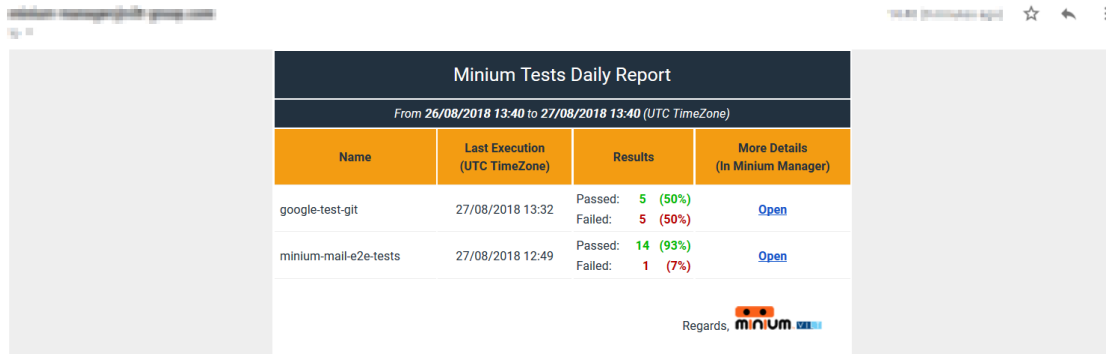

Minium Tests Daily Report			
From 26/08/2018 13:40 to 27/08/2018 13:40 (UTC Timezone)			
Name	Last Execution (UTC Timezone)	Results	More Details (In Minium Manager)
google-test-git	27/08/2018 13:32	Passed: 5 (50%) Failed: 5 (50%)	<a href="#">Open</a>
minium-mail-e2e-tests	27/08/2018 12:49	Passed: 14 (93%) Failed: 1 (7%)	<a href="#">Open</a>

Regards, 

To delete the configuration, click on the button "Delete Daily Report Configuration".

The daily report was configured to be sent at **06:00** with the status of the last completed execution in the last 24 hours for the following projects:

- authenticated\_project
- google-test-git
- google-test-svn
- minium-mail-e2e-tests
- test
- test-jvm-project
- unauthenticated\_project


[Change Daily Report Configuration](#)

[Delete Daily Report Configuration](#)

## 14.4. Data Extraction Reports

The Data extraction report is a custom report (in Excel format) with your favorite projects that will be sent to the specified email addresses with the status of the last completed execution, and the project details.

To create and/or consult the data extraction reports configurations, open the [Management](#) menu and click on [Data Extraction Report](#).

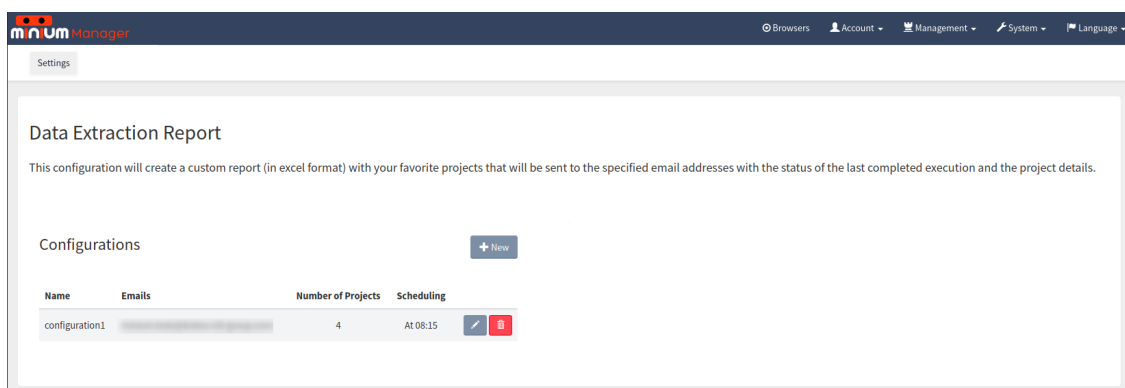

Name	Emails	Number of Projects	Scheduling
configuration1		4	At 08:15


At the data extraction report page, you can see the current configurations created at the list

Configurations.



You can edit (by clicking in the **pencil** button) or delete (by clicking on the **trash** button) the configurations listed at the list `Configurations`.

Also, you can create a new configuration by clicking on the button + `New`.

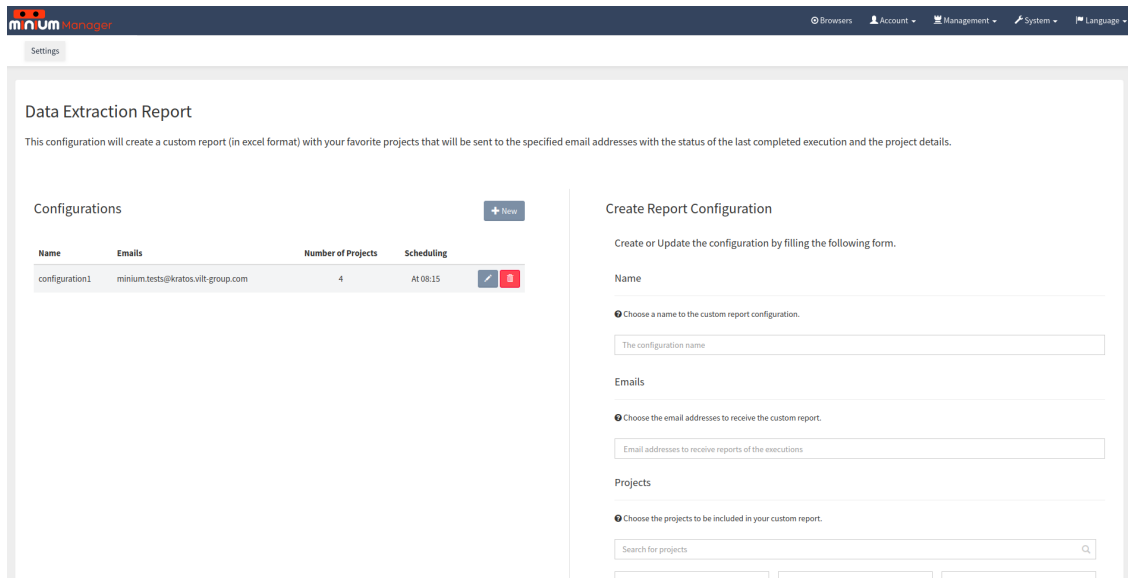When you click the button + `New`, a form will appear (similar to the edit form) on the right side of the page:



The screenshot shows the 'Data Extraction Report' configuration page. On the left, there is a table of configurations:

Name	Emails	Number of Projects	Scheduling	
configuration1	minium.tests@kratos.vilt-group.com	4	At 08:15	 

On the right, the 'Create Report Configuration' form is shown with the following fields:

- Name:** A text input field with the placeholder 'The configuration name'.
- Emails:** A text input field with the placeholder 'Email addresses to receive reports of the executions'.
- Projects:** A search input field with the placeholder 'Search for projects' and a search icon. Below it are three dropdown menus for filtering projects by 'Name', 'Type', and 'Label'.

To create a new configuration, fill the form by add a new configuration name (unique value), the emails that will receive the configuration, choose the projects to be included in the report and finally, schedule the time the email will be sent, with the report.

**Note:**



To choose the projects, you have filters available to help. You can filter the project by name, type, group and label.

To save the configuration, click on the button + `Save`.

The email received will list a summary of the projects selected (separated by type), the statistics of the monitoring projects (How many executions since last report was sent, how many executions passed and how many executions failed), and will have the report (in Excel format) attached.

**Note:**



The subject of the email received is "Data Extraction Report".

## 15. Roles


Roles allow granting different privileges to the users and the groups. The privileges associated with each role are described in the table below:

	User	Manager	Administrator
View projects	✓	✓	✓
Launch test executions	✓	✓	✓
Configure projects	✓	✓	✓
Create projects		✓	✓
Manage project labels		✓	✓
Manage users			✓
Manage roles			✓

### 15.1. Assign roles

To change the role of a user or group, navigate to [Management](#) > [Roles](#) at the navigation bar and:

1. Introduce the name of the user or group in the search bar.
2. Select a role.
3. Click on [Save](#) button.

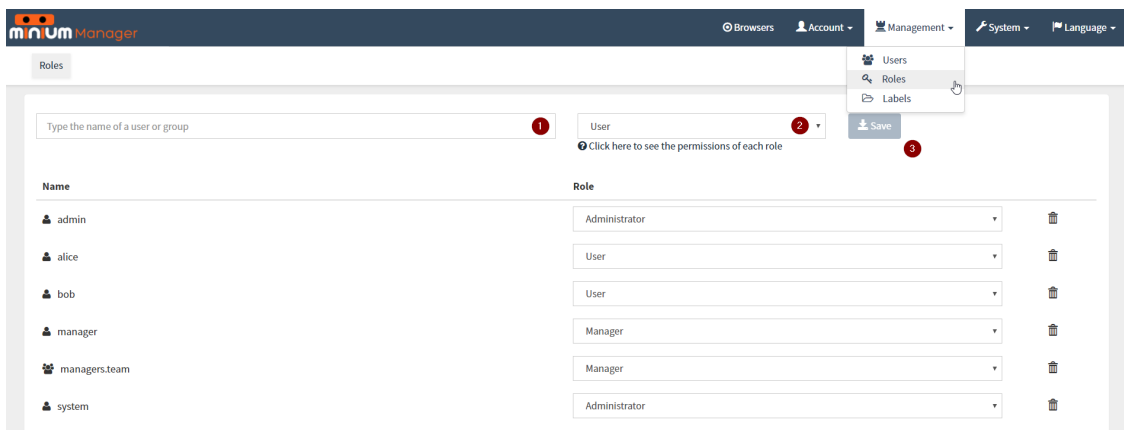


The screenshot shows the 'Roles' management page in the VILT Minium Manager. At the top, there is a navigation bar with 'Management' selected. Below it, a search bar is labeled 'Type the name of a user or group' (1). A dropdown menu is open, showing 'Roles' selected (2). A 'Save' button is visible (3). The main area displays a list of users and their assigned roles:


Name	Role
admin	Administrator
alice	User
bob	User
manager	Manager
managers.team	Manager
system	Administrator

## 15.2. License information

At the top right of the project list page exists the license information label, that gives the number of executed scenarios in this month, and the total of scenarios per month that to the current license

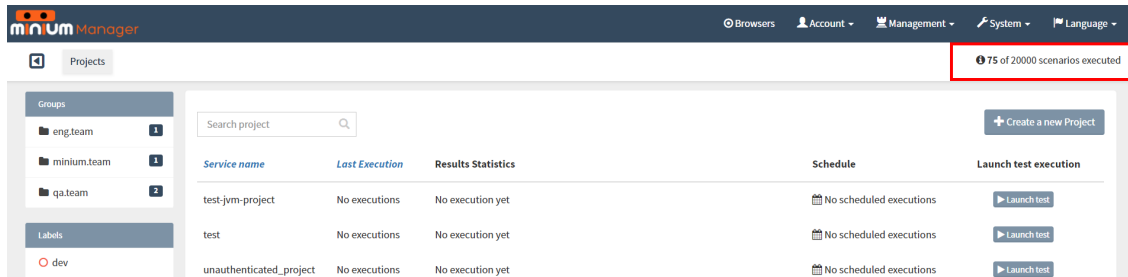

By clicking on the license information label, it will open a modal with more detailed information about one license.

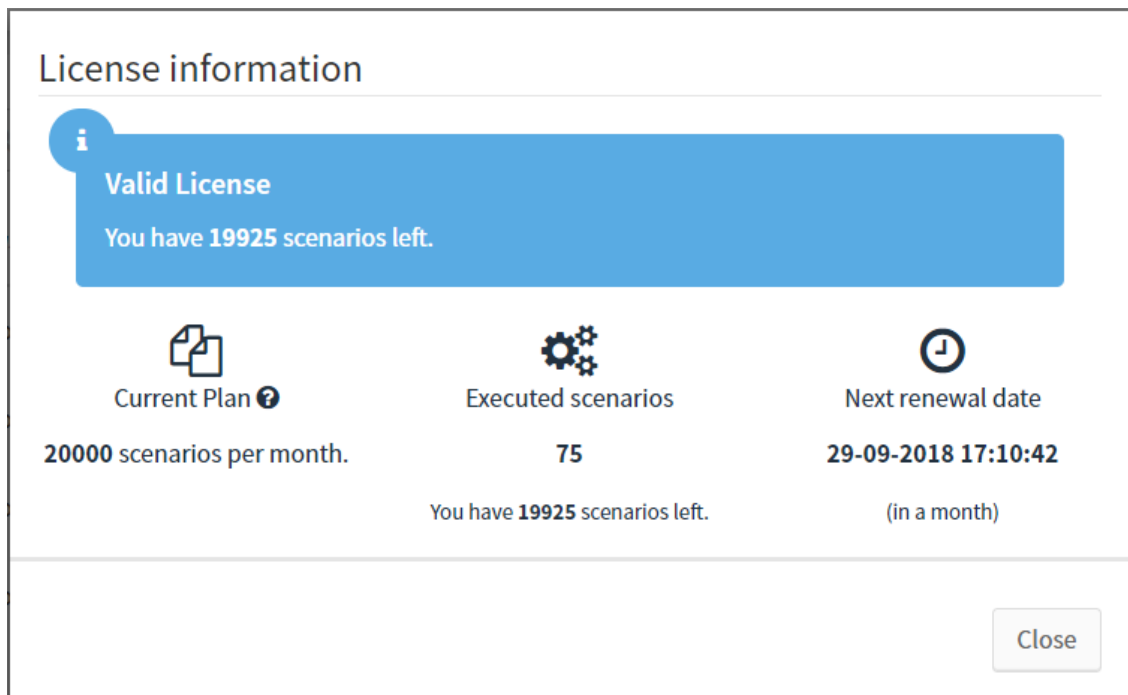

## Minium Recorder User Guide

**Minium Recorder** has been developed to ease and accelerate the creation of Minium tests. With the **Minium Recorder**, is no longer needed to write all the code for the step definitions by hand. Simply tell to the **Minium Recorder** to start recording the interactions with the browser, perform the actions that correspond to the defined step and an automation script is immediately available in **Minium Developer**.

But what really makes Minium Recorder different in relation to other automation script recorders is that, for each element that interacts, Minium Recorder will not generate just one CSS selector. Instead, is possible choose among a list of alternative expressions for each element that take advantage of the great Minium filtering methods that are used like for example `withLabel`, `below`, `rightOf`, etc, to build more readable and resilient expressions.

## 16. Configure Minium Developer

**Minium Recorder** is already configured at **Minium Developer Prime**, but you can configure an existing **Minium Recorder**.

To configure **Minium Developer** with the **Minium Recorder** extension, first you need to download the **Minium Recorder** extension.

Navigate to the folder where **Minium Developer** is installed, create a folder named "**extensions**", copy the **Minium Recorder** extension file to the new folder and rename the file to "minium-recorder.crx".

After, edit the `config/application-{windows,linux,macos}.yaml` file in order to add the following configuration (at the chrome webdriver):

```
minium:
  developer:
    webdrivers:
      - name: chrome
      ...
    chromeOptions:
      extensions:
        - ${app.home:./}/extensions/minium-recorder.crx
      preferences:
        devtools:
          preferences:
            panel-tabOrder: "{\"chrome-
extension://ggfeclafoeoejognlebilidgmgdlogMiniumRecorder\":10,\"elements
\":20,\"console\":30,\"sources\":40,\"network\":50,\"timeline\":60,\"heap_
profiler\":70,\"resources\":80,\"security\":90,\"audits\":100}"
```

## 17. Launch Minium Recorder


Launch **Minium Recorder** through **Minium Developer**.

Open **Minium Developer** and add the following command to the editor:


```
browser.get("http://www.google.com/ncr")
```

This will load the google search engine website, when the instance of Chrome is launched.

To launch Minium Recorder, use the (Ctrl + Enter) shortcut or select **Run > Launch Browser (1)** and **(2)** at the top-right menu:

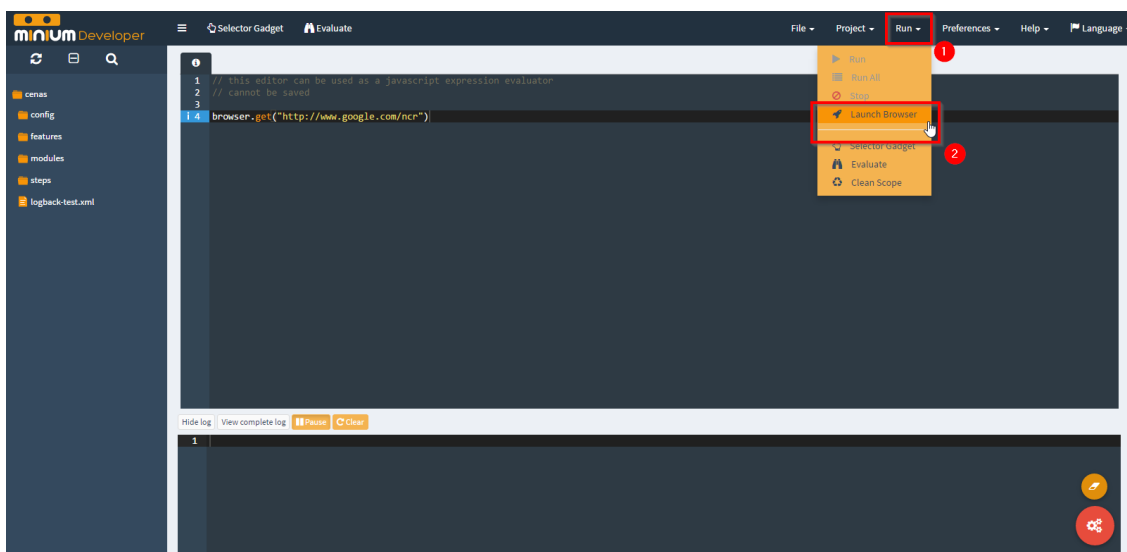


Select the **Chrome browser (1)**, check if **Minium Recorder is available (2)** and click **Created a new WebDriver (3)**:

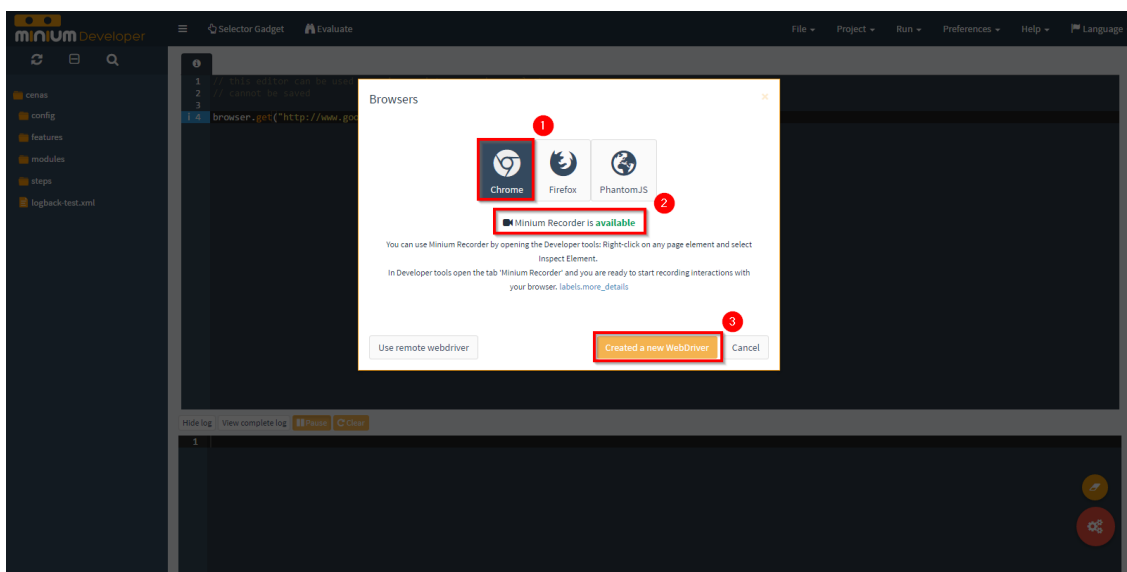


A new instance of Chrome will be launched with the Minium Recorder extension installed. In the instance of Chrome, open the `Developer tools` by using the (F12) shortcut (use another [shortcut](#)) or select `More Tools > Developer tools`.

After the `Developer tools` of the instance Chrome is opened, select the `Minium Recorder` tab (1):

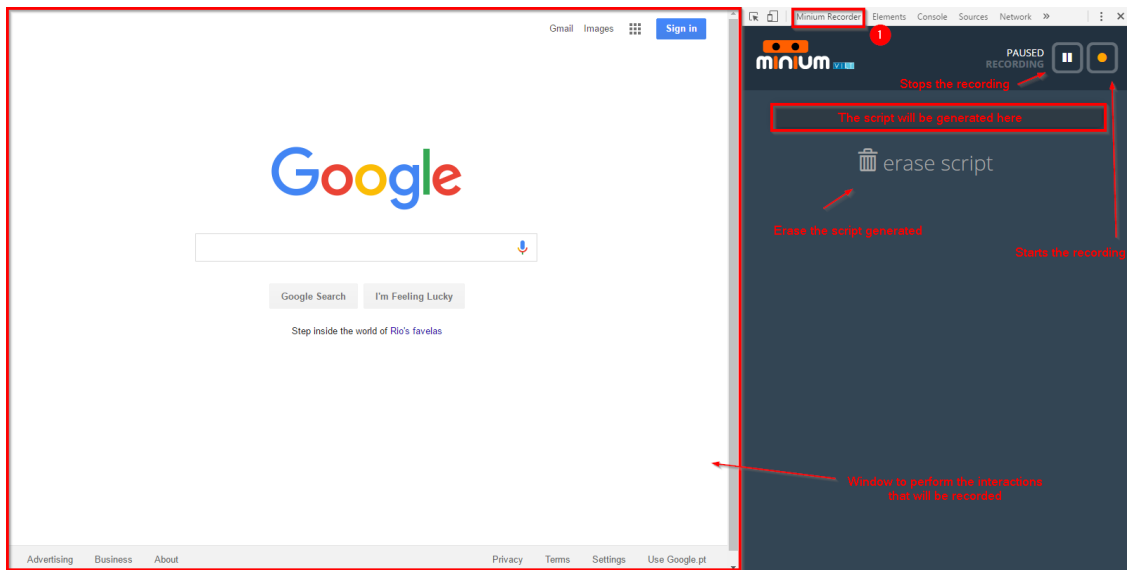

## 18. Start recording


To start recording, click on the following button:

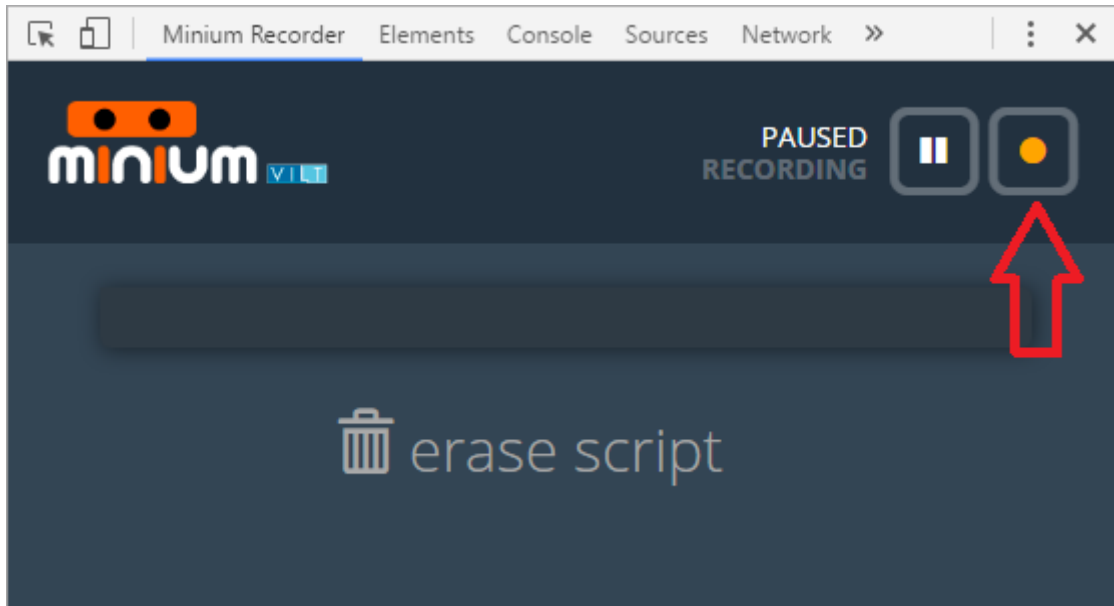

From now on, every interaction performed with the browser will be recorded.

## 19. Record interactions

For every action performed on the browser, like clicking on an element or filling a text input field, Minium Recorder will automatically generate the corresponding code. If typed an URL in the address bar, Minium Recorder will also generate the code to load that URL.

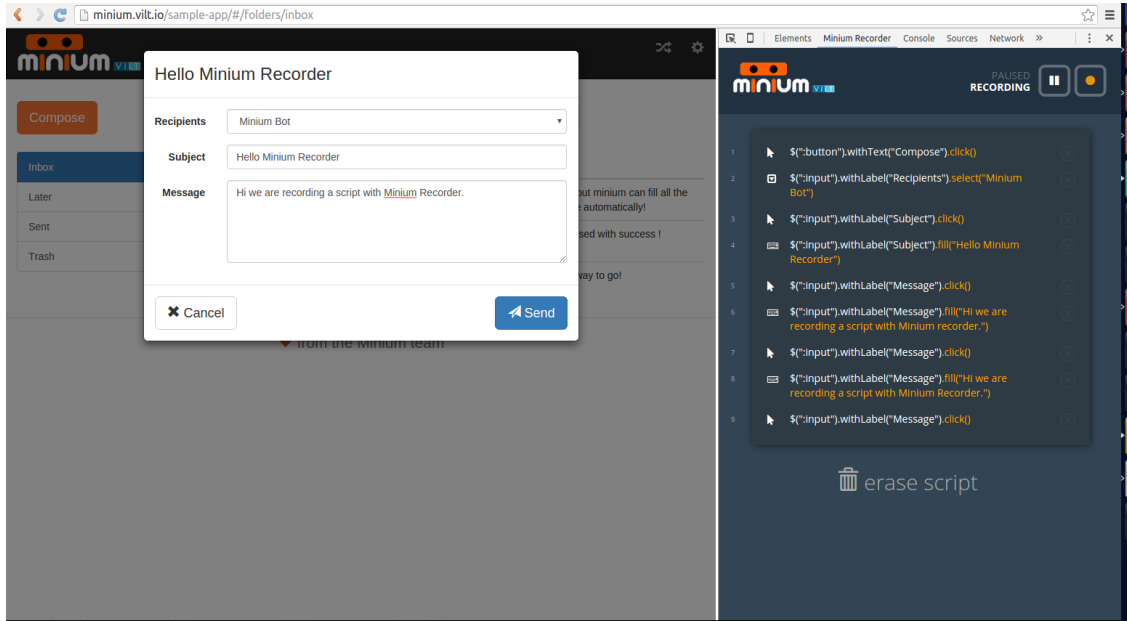


To try other expressions, click on the expression and a list of alternative expressions will be displayed:



To select an expression, just click on it.

## 20. Stop recording

Click on the pause button to stop a recording.

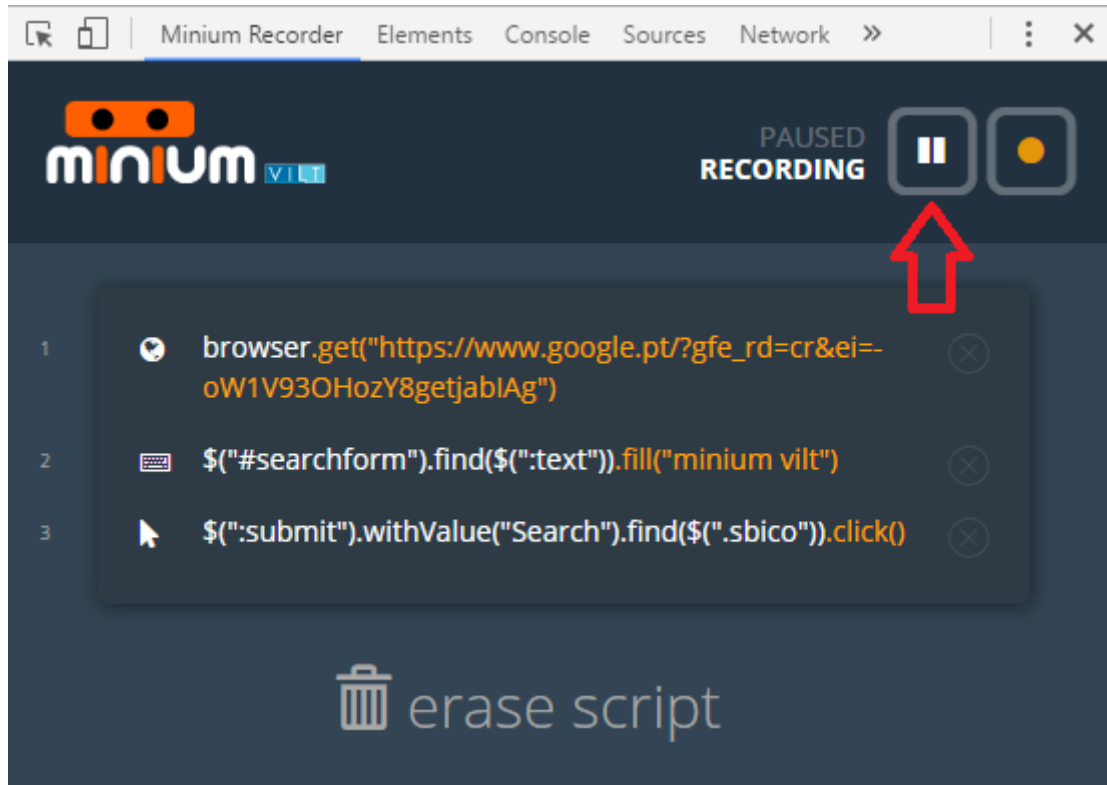

## 21. Import the recorded script in Minium Developer

To import a script in Minium Developer, right-click on the editor area, where is intended to put the script, and choose the option `Import recorded script`:

