



VILT Minium Manager

User Guide

Version 2.7.22



Contents

1. Introduction	1
2. Projects	2
2.1. Monitoring	2
2.1.1. Check if the website is ok	3
2.1.2. Do a search on the website with refresh and check how long it took to load. . .	4
2.1.3. Click on a link and get the performance of the page	4
2.2. Cookie	4
2.3. Setup a project	5
2.3.1. General	5
2.3.2. Browsers	8
2.3.3. Reports and Scheduling	10
2.3.4. Advanced	13
2.3.5. Runtime	14
2.3.6. API	15
2.4. Project permissions	16
2.5. Organise projects by Labels or Groups	18
2.5.1. Manage Labels	19
2.5.2. Assign labels to the projects	20
2.5.3. Manage groups	21
Manage groups using LDAP authentication	21
Manage groups without LDAP authentication	22
2.5.4. Organise Projects	24
Clean project filters	26
Project Type	26
Auto Refresh	27
Filter by Results	27
2.6. Configuration profiles	28
2.7. Secret configuration properties	29
2.8. Add test information to Minium Manager Report (output)	30
2.9. Delete a project	31
2.10. Edit projects in batch	32
2.11. View Queue	33
2.12. Edit project code (Projects in filesystem only)	35
2.13. Check the available browsers	38
2.14. Project Statistics	38
3. Test executions	40
3.1. Launch test executions	40
3.1.1. Launch a test execution manually	40
3.1.2. Schedule test executions	42
3.1.3. REST API	43
3.2. Follow the progress of a test execution	46
4. Monitor test results	47

4.1. Feature overview	56
4.2. Reports	57
4.3. Daily Reports	58
4.4. Data Extraction Reports	59
4.4.1. Crawler Aggregator	61
4.5. Regressions	61
5. Roles	65
5.1. Assign roles	65
6. License information	66
7. Minium Recorder User Guide	67
7.1. Configure Minium Developer	67
7.2. Launch Minium Recorder	67
7.3. Start recording	69
7.4. Record interactions	69
7.5. Stop recording	71
7.6. Import the recorded script in Minium Developer	72

1. Introduction

This document describes the user interface of the VILT - Minium Manager, version 2.7.22.

Minium Manager is a web testing automation platform designed to assure your platforms and applications perform as intended across several combination of browsers and OS's on a continuous integration fashion. If something is not working as expected, Minium Manager can send you notifications and can also record videos so you can easily identify problems, and also provides access to detailed reports on test executions and its results. With Minium Manager it is easy to write and manage tests: writing new tests gets almost as easy as writing English and test management is very straightforward.

With the purpose of giving you a way of assuring the quality of your platforms and applications, it provides you with different types of projects that can focus on different components of an application, such as usability, availability and performance. By allowing you to design more focused tests you can guarantee the robustness of you platforms and applications with Minium Manager

2. Projects

Configure projects in Minium Manager, in order to run and analyze end-to-end tests. All projects need to have a repository (`Git` or `SVN`) associated, where the code is stored, except the Cookie Crawler.

There are three type of projects: Web application testing, Monitoring and Cookie.

The Web application testing project is a Minium project that navigates a website in the same way a human would.

The Monitoring project is a Minium project that are executed with high frequency (every 5, 10, 20 minutes), and can give us a report about the availability of a certain page and performance metrics, with the objective to check that the page are working as expected.

The development workflow for a Monitoring project in Minium Developer will be similar to the web application testing project, providing an easy and quick way to write test. The configuration in Minium Manager is similar to other projects. The monitoring project does not have the browser configuration.

The Cookie project generates a report of cookies found during the navigation or crawl of a website. The Cookie is divided in two projects: Cookie Report project and Cookie Crawler project. The Cookie Report project is a Minium project (based on the monitoring project) that extracts the all browser cookies at the end of a scenario. The Cookie Crawler project is a crawler that given one or more URLs, it crawls the websites and, for each URL, extracts the all browser cookies.

2.1. Monitoring

To start the development of a monitoring project, you need to check the checkbox `Is a Monitoring Project?` to generate the monitoring project:

New project cucumber

Project type Cucumber Project Automator Project

Parent Directory

Parent Directory

Project Name

Project Name

Is a Monitoring Project? This configuration will generate a different Cucumber Project, focused to retrieve information about the availability of a certain page and performance metrics.

Advanced

Create

Cancel

Here are some examples of the development workflow in Minium Developer of the monitoring project:

2.1.1. Check if the website is ok

Use case: You want to test if the URL is ok and get the performance in the reports

Scenario:

```
Scenario: Check Blog La caixa
  When Check if website responds: &quot;https://blog.caixabank.es/&quot;
```

Step:

```
When(/^Check if website responds: &quot;([^&quot;]*)&quot;$/,
function(url) {
  browser.get(url);
});
```

For a monitoring project, the expression `browser.get(url)`; retrieves the data related to page load performance, the URL status, the number of requests, the page size and javascript errors. This information will be presented at the Minium Manager report.

2.1.2. Do a search on the website with refresh and check how long it took to load.

Use case: You want to perform a search on the website (where's there's a refresh after the search) and check if the results appear and get the performance of the page.

Scenario:

```
Scenario: Search
  Given I'm at
  &quot;https://www.caixabank.es/particular/home/particulares_es.html&quot;
  When Search for &quot;CaixaBank&quot; and check the results
```

Steps:

```
When(/^I'm at &quot;([^&quot;]*)&quot;$/, function(url) {
  browser.get(url);
});

When(/^Search for &quot;([^&quot;]*)&quot; and check the results$/,
function(search) {
  $('&quot;#cookies-accept-full a&quot;').click();
  $('&quot;#search-field&quot;').fill(search);
  $('&quot;#prebuscadorCabecera input[type='submit']&quot;').click();
  expect($('&quot;.search-result-block&quot;')).to.exist();
  scenario.write(browser.getPerformance());
});
```

The expression `scenario.write(browser.getPerformance());` retrieves and store the data related to the last page load performance, the URL status, the number of requests, the page size and javascript errors. This information will be presented at the Minium Manager report.

2.1.3. Click on a link and get the performance of the page

```
When(/^I click on link with text &quot;([^&quot;]*)&quot;$/,
function(text) {
  $('&quot;a&quot;').withText(text).click();
  expect($('&quot;.page-title&quot;')).to.exist();
  scenario.write(browser.getPerformance());
});
```


2.2. Cookie

Since the Cookie Report project is a Minium project (based on the monitoring project), to create a Cookie Report project, simply generate a Monitoring project in Minium Developer. It is not necessary to add extra instructions to the minium code, since all browser cookies will be automatically extracted at the end of each scenario.

For the Cookie Crawler project, development is not necessary, you only need to provide one or more URLs to crawl.

2.3. Setup a project

To set up a project, click on the button `New Project`:

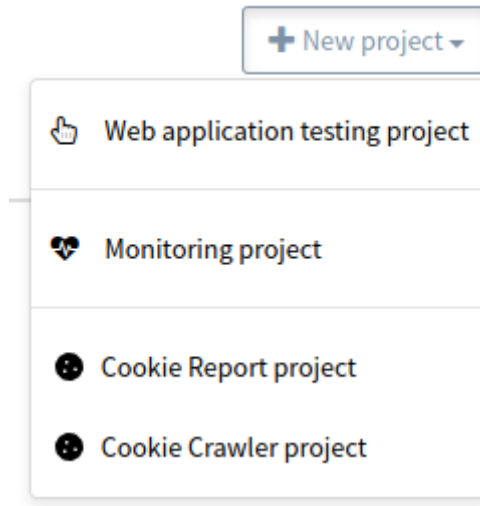

There are 4 project types we can select:

- Web application testing project
- Monitoring project
- Cookie Report project
- Cookie Crawler project

Then, fill the form:

2.3.1. General

Project Configurations for **Enterprise Email end-to-end testing** ✕

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

i General

Browsers

Reports and Scheduling

Advanced

▶ Runtime

↻ API

Name*

Description

Labels + Add ▾

Repository

Type* git Git Subversion File System

URL*

Username

Password 👁

Branch

🗑 Delete Project
📄 Update
🚫 Cancel

On the `General` tab, fill the following fields:

Name	Display name of the project (e.g gmail-e2e-tests)
Description	Optionally provide a project description
Labels	Associated labels to a project in order to organize and filter projects.
Type	Type of SCM repository
Url	URL of the repository where the project with the features is stored (GIT and Subversion only). The following are examples of valid git URL's (or a local file path): https://github.com/github/git.git //path-to-repo/repos/gmail-e2e-tests
Username/Password	Credentials for authentication on the repository (GIT and Subversion only).

Branch	The name of the branch you want to execute (GIT only). The default value is <code>master</code>
Code	Upload one archive zip with the minium project (File system only). If no archive zip is uploaded, Minium Manager will use the template projects.
Download Zip	Downloads the current minium project (File system only).
Edit	Opens the editor to edit the minium project (File system only).

Cookie Crawler

For the Cookie Crawler project the General tab is different:

Project Configurations for **test cookie crawler project** ✕

General ⚙ Reports and Scheduling ⚙ Advanced ▶ Runtime 🔄 API

Name*

Description

Labels + Add ▾

Cookie Crawler Settings

Urls crawler* ✕

Domains to Filter* ✕ ✕

Max Depth* ⌵

Accept Cookies **Active**

Cookies Validations

Configuration* **Match Type*** Partial Full


Configurations Set the cookie name and/or value and/or URL of the cookies you want to validate.

abcde	Cookie Value	Url	✕
demdex	Cookie Value	Url	✕
Cookie Name	Cookie Value	Url	+

✕ Delete Project

Urls crawler	The URLs you want to crawl (e.g. https://www.caixabank.es/index_es.html)
Domains to Filter	The domains you want to filter at the crawl (e.g. www.caixabank.es)
Max Depth	Maximum depth for the crawler to follow links automatically
Accept Cookies	Accept the cookie warning during the crawl (is related to the field <code>Script to accept cookies</code> at the Runtime tab of the Cookie Crawler project).
Configuration	The type of configuration to validate the cookies. The <code>Manual</code> validation, the user will add the cookies to validate manually. The <code>JSON URL</code> validation will retrieve the cookies to validate in a rest api call.
Match Type	The type of match that will be used to validate the cookies. The <code>Partial</code> will only validate if the cookies configured are present in the list of cookies retrieved. The <code>Full</code> will validate if the list of cookies retrieved, and the cookies configured to validate are identical. If not, the result will present the difference.
Configurations	the cookie name and/or value and/or URL of the cookies you want to validate. After you configure one validation, click at the button <code>+</code> to add the validation.
JSON URL	Add the url to the json that contains the cookies to validate.

2.3.2. Browsers

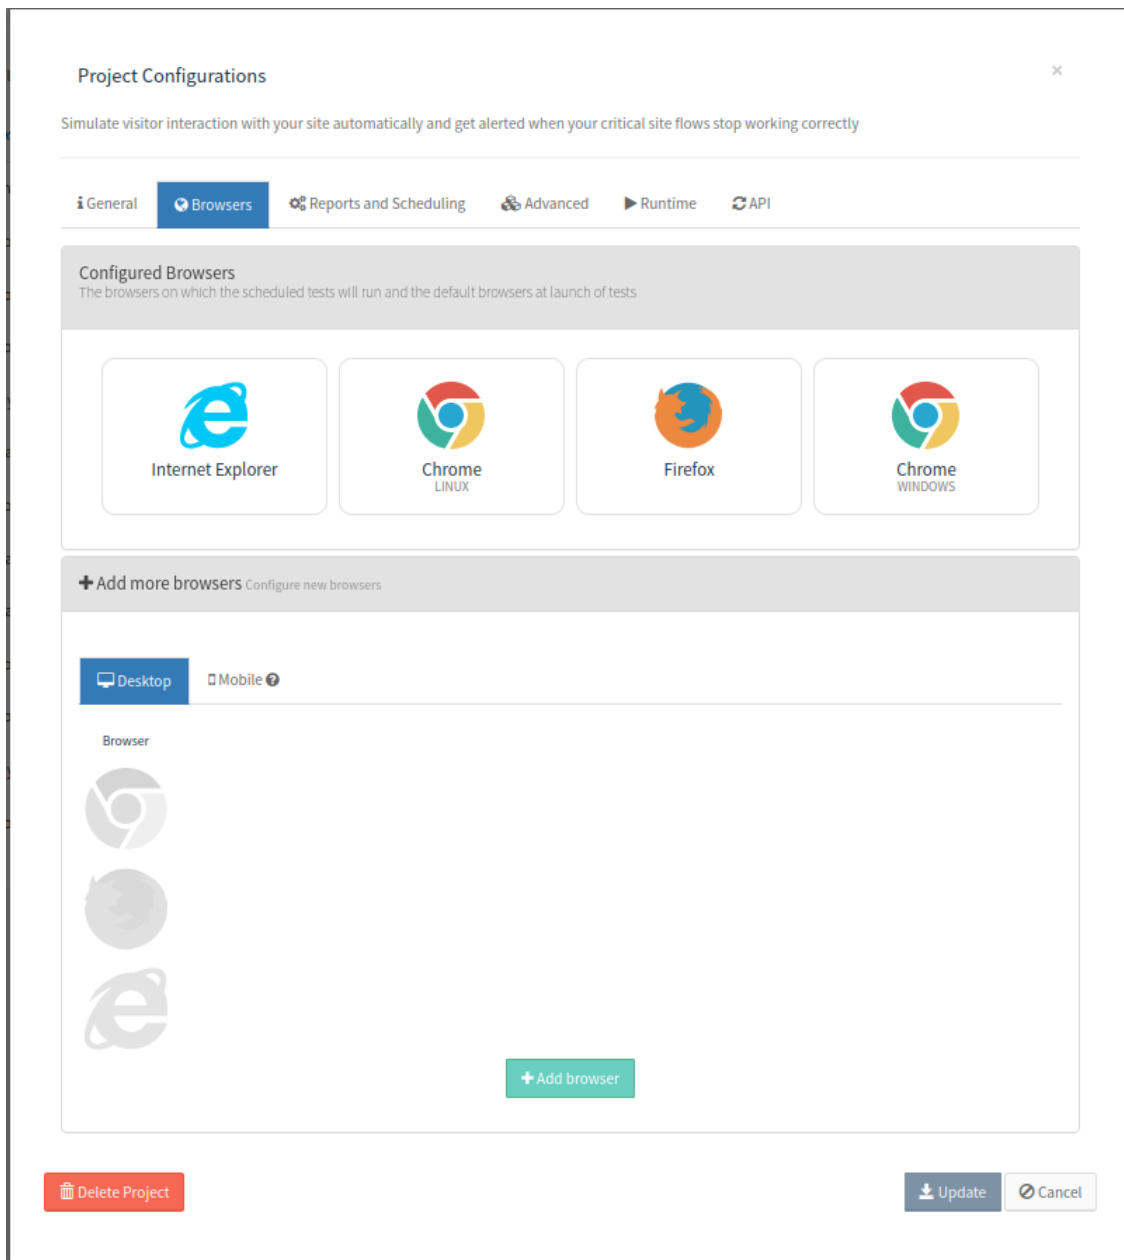

On the `Browsers` tab, choose the browsers on which the scheduled tests will run, and the default browsers at launch of tests.

To configure the browsers, click `Add more browsers` to expand the available browsers and select a browser (and the properties) and/or the mobile devices (emulated via chrome). After, click `Add browser` or `Add device` (for mobile devices).

If you want to remove a configured browser, move the mouse over the browser configuration (below the configured browsers) and click on the trash icon.



Note:

The `Browsers` tab is not available for the monitoring and cookie projects.

2.3.3. Reports and Scheduling

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

General | Browsers | **Reports and Scheduling** | Advanced | Runtime | API

Emails

Recipients

Report formats PDF XLSX
 PDF with screenshots

Notifications (Advanced)

Send only when there are test failures

Number of fails to notify the error

Scheduling

Scheduler Never run Every Day Every Week
 Every Month Every Day at midnight Custom
 Cron Expression

On the **Reports and Scheduling** tab, fill the following fields:

<p>Recipients</p>	<p>Set email addresses to receive a report of execution for the project. You can search by the username or email in the list of users registered in the system (or present in ldap). You can also add emails that are not on the list. If you want to receive the pdf report with screenshots, check the option "PDF with screenshots".</p>
<p>Send only when there are test failures</p>	<p>If you only want to receive the report of the executions that contains failed tests, check this option. Also, if the credentials of the SCM repository fails, the email addresses will receive a notification warn the users that the SCM credentials are invalid ou incorrect.</p>
<p>Number of fails to notify the error</p>	<p>Set the number of failed tests in a row to notify the user (via email and sms).</p>

Scheduler	Set the schedule you want to execute the project and send the report of the execution. If you choose the option <i>Custom</i> , you can set a custom schedule.
Scheduler Custom Configurations	Set the schedule you want to execute the project and send the report of the execution with different levels of granularity.
Cron Expression	Set the schedule you want to execute the project and send the report of the execution via a cron expression.

Monitoring

For the monitoring project the *Reports* and *Scheduling* tab contains more configurations:

Project Configurations for **Blog LaCaixa** ×

Monitor page load performance. Make informed optimization armed with the size and load time of your applications.

General
Reports and Scheduling
Advanced
Runtime
API

Emails

Reports ● Active

Recipients

Send only when there are test failures

Report formats

PDF
 XLSX

PDF with screenshots

Send email when a webpage is not responding or is recovered

SMS

Alert ● Active

Recipients

Scheduling

Scheduler ● Inactive

On the *Reports* and *Scheduling* tab for the monitoring projects, you can also need to fill the

following fields:

Send email when a webpage is not responding or is recovered	Send the email notification to the emails configured at the Recipients (Emails) configured to warn the user when the website is not responding, or the website recovers (from a failure).
Recipients (SMS)	Set mobile phone numbers to receive an SMS when the project. You can search by the username or phone number in the list of users registered in the system (or present in ldap). You can also add phone numbers that are not on the list.
Edit SMS Messages	Set the messages that the users will receive on failure and on recovery.

Cookie Crawler

For the monitoring project the `Reports` and `Scheduling` tab contains more configurations:




The screenshot shows a configuration window titled "Create or edit a Project". It has a tabbed interface with "Reports and Scheduling" selected. Under the "Emails" section, there is a "Reports" toggle set to "Active", a "Recipients" text input field, "Report formats" buttons for PDF and XLSX, and a "Join report with cookie minium project" dropdown menu set to "None". Under the "Scheduling" section, there is a "Scheduler" toggle set to "Inactive". At the bottom right, there are "Save" and "Cancel" buttons.

On the `Reports` and `Scheduling` tab for the Cookie Crawler projects, you can also need to fill the following fields:

<p>Join report with cookie minium project</p>	<p>Set the Cookie Report project to the Cookie Crawler project to join the cookie report in a single project. The report generated will contain the result of the last execution of the Cookie Crawler project, and the result of the last execution of the Cookie Report project.</p>
--	--

2.3.4. Advanced

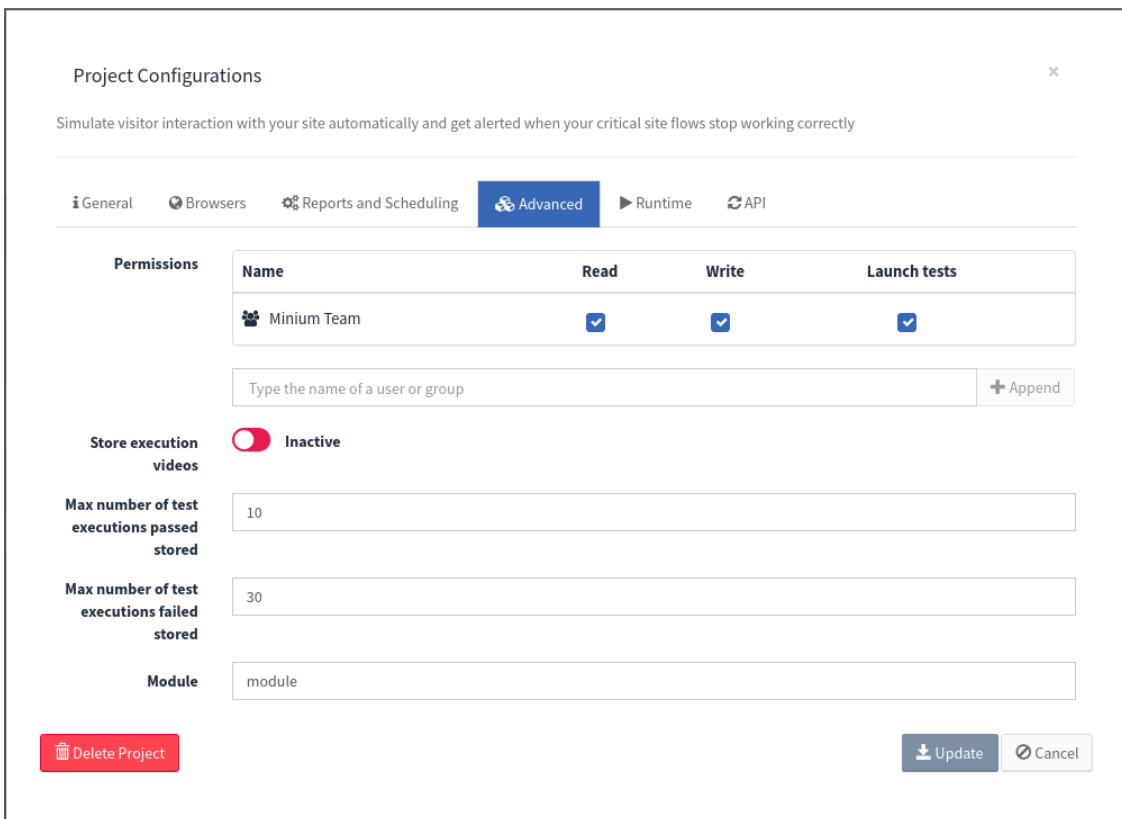


The screenshot shows the 'Project Configurations' dialog box with the 'Advanced' tab selected. The 'Permissions' section has a table with columns for Name, Read, Write, and Launch tests. The 'Minium Team' has all three permissions checked. Below this is an input field for adding more users and an 'Append' button. The 'Store execution videos' section has a toggle switch set to 'Inactive'. The 'Max number of test executions passed stored' is set to 10, and the 'Max number of test executions failed stored' is set to 30. The 'Module' field contains the text 'module'. At the bottom, there are buttons for 'Delete Project', 'Update', and 'Cancel'.

On the **Advanced** tab, fill the following fields:

<p>Permissions</p>	<p>Add and personalize the level of access that assigns to each user or group.</p>
<p>Store executions videos</p>	<p>Configuration to allow the storage of videos of the executions. When inactive, no videos will be stored, otherwise the videos will be stored. By default, the storage of videos is inactive.</p>
<p>Max number of test executions passed stored</p>	<p>Set the max number of executions passed to be stored at Minium Manager. The default value is 30.</p>

Max number of test executions failed stored	Set the max number of executions failed to be stored at Minium Manager. The default value is 30.
URL Loading time threshold	Maximum time to load a page (in seconds) to warning the user at the executions page. Available only to Monitoring projects
Module	The path to the folder where the features are in the repository (e.g. minium-developer-e2e-tests).

2.3.5. Runtime

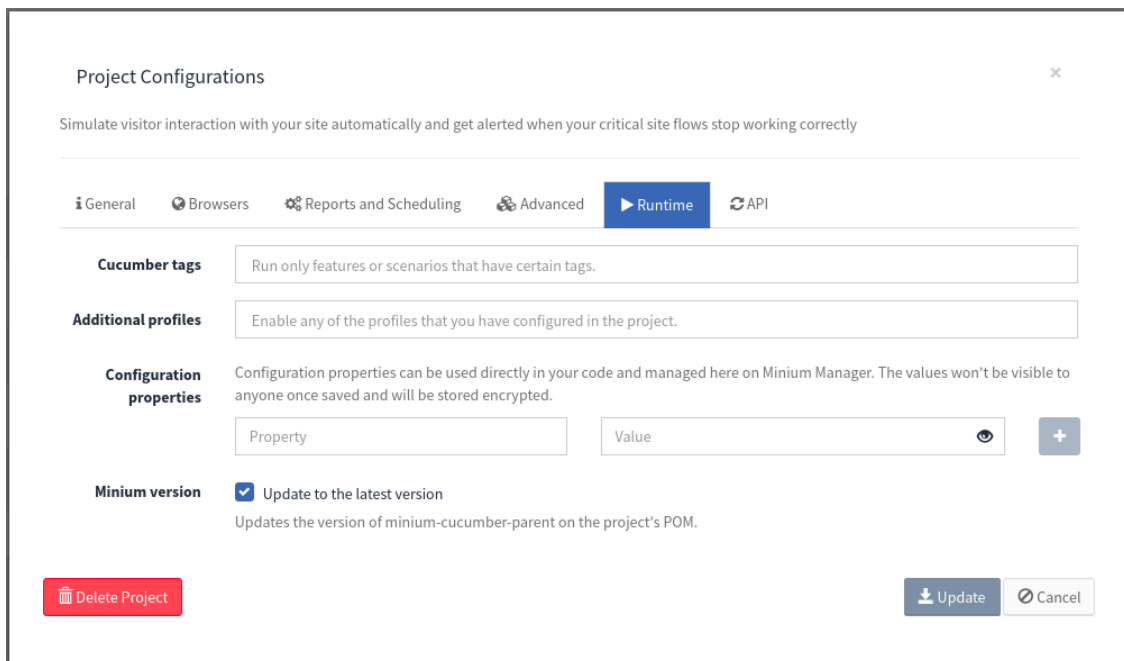

Project Configurations ×

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

General
Browsers
Reports and Scheduling
Advanced
▶ Runtime
API

Cucumber tags

Additional profiles

Configuration properties Configuration properties can be used directly in your code and managed here on Minium Manager. The values won't be visible to anyone once saved and will be stored encrypted.

Property	Value	
<input type="text"/>	<input type="text"/>	👁️
		<input style="background-color: #6c757d; color: white; padding: 2px 5px;" type="button" value="+"/>

Minium version Update to the latest version
Updates the version of minium-cucumber-parent on the project's POM.

🗑️ Delete Project
⬇️ Update
🚫 Cancel


At the `Runtime` tab, fill the following fields:

Cucumber tags	Use this option to tell Minium Manager that only run features or scenarios that have certain tags.
Additional Profiles	Enable any of the profiles that are configured in the <code>./config/application.yml</code> project file. See [_configuration_profiles] for more details.

<p>Configuration properties</p>	<p>This configuration properties can be used directly in your code and managed here on Minium Manager. The values won't be visible to anyone once saved and will be stored encrypted.</p>
--	---


Cookie Crawler

For the Cookie Crawler project the Runtime tab is different:

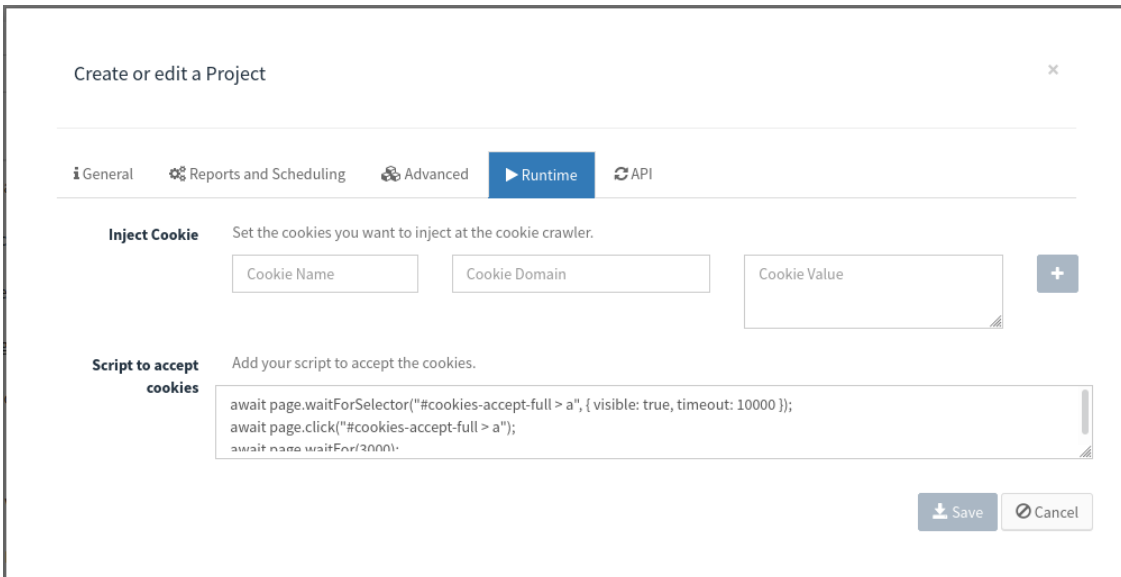

<p>Inject Cookie</p>	<p>The cookies you want to inject at the crawl (e.g. cookie to accept the cookie warning)</p>
<p>Script to accept cookies</p>	<p>The script to accept the cookie warning (in puppeteer). This field is related to the field <code>Accept Cookies</code> at the General tab of the Cookie Crawler project. The default script accepts the cookie warning for https://www.caixabank.es.</p>

2.3.6. API

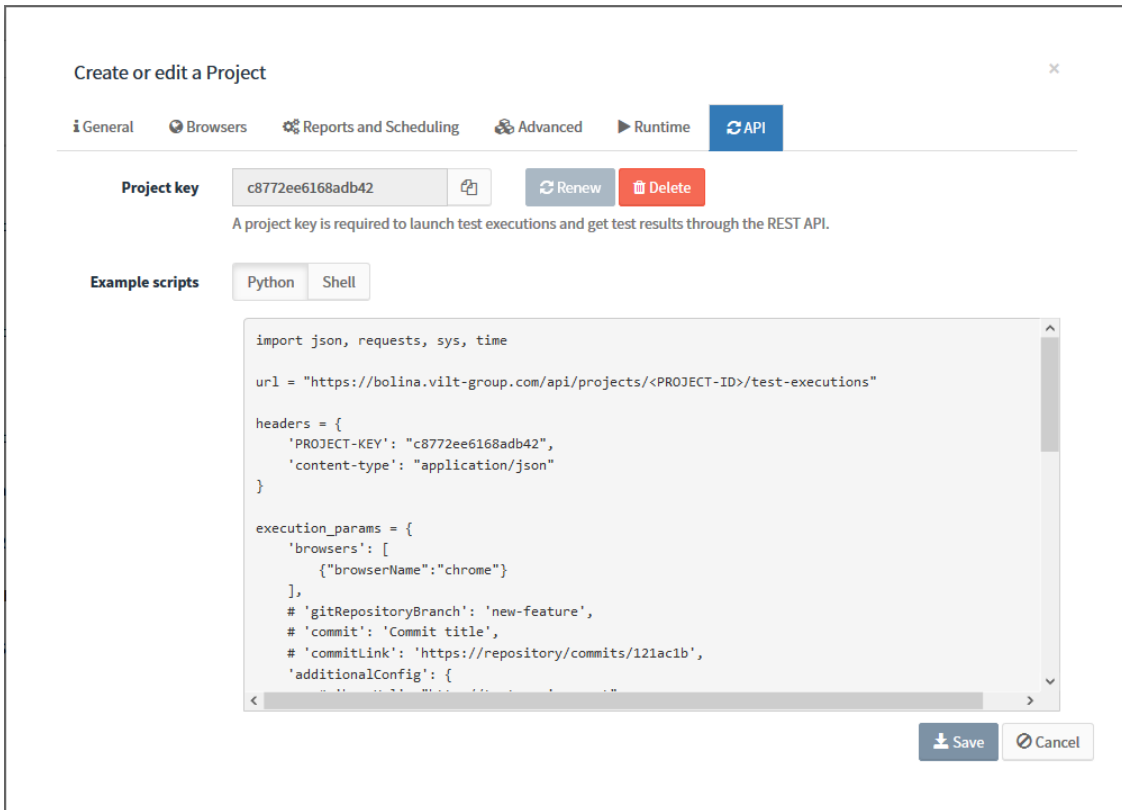

On the `API` tab, fill the following fields:

<p>Project key</p>	<p>Generate a project key (required to launch test executions and get test results through the REST API).</p>
<p>Example scripts</p>	<p>Once the project has an API key, the scripts will be fulfilled with the project-specific data and ready to use. The first part of the script shows how to launch a test execution.</p>

2.4. Project permissions

Manage the access levels of the users/groups in the projects. It is also possible to add and personalize the level of access that assigns to each user or group, per-project.



Note:

Write permissions is required to update the permissions of a project.

In order to change the project permission the first step is go to the project configuration and click on tab `Permissions`.

Project Configurations
✕

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

General
Browsers
Reports and Scheduling
Advanced
Runtime
API

Permissions

Name	Read	Write	Launch tests	
admin	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
minium.team	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
qa.team	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
eng.team	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

+ Append

Store execution videos Inactive


Max number of test executions passed stored

Max number of test executions failed stored

Module

Delete Project
Update
Cancel

Add user or groups to the permission table. Below the permission table, start typing the name of the user or group desired. Then click on the button `Append`.



Note:


It is possible to select more than one user or group.

bob ✕

alice ✕

+ Append

After the users or groups was appended to the permissions table, define the permission for each entry appended and click `Update` to save the project configurations.



CHANGING WAYS
TOGETHER













17

Project Configurations ×

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

General Browsers Reports and Scheduling Advanced Runtime API

Permissions

Name	Read	Write	Launch tests	
 admin	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
 minium.team	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
 qa.team	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
 eng.team	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
 bob	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
 alice	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

+ Append

Store execution videos **Inactive**

Max number of test executions passed stored


Max number of test executions failed stored

Module

Delete Project Update Cancel


2.5. Organise projects by Labels or Groups

Labels were meant to be used only to filter projects in the Projects page providing a useful way to organize the projects.

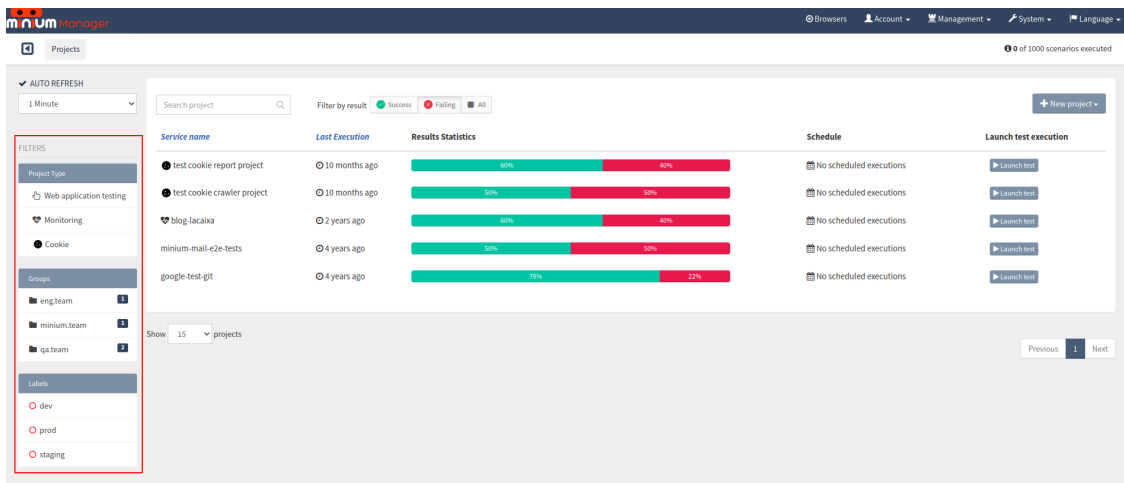


2.5.1. Manage Labels

To manage the labels, open the **Management** menu and click on **Labels**:

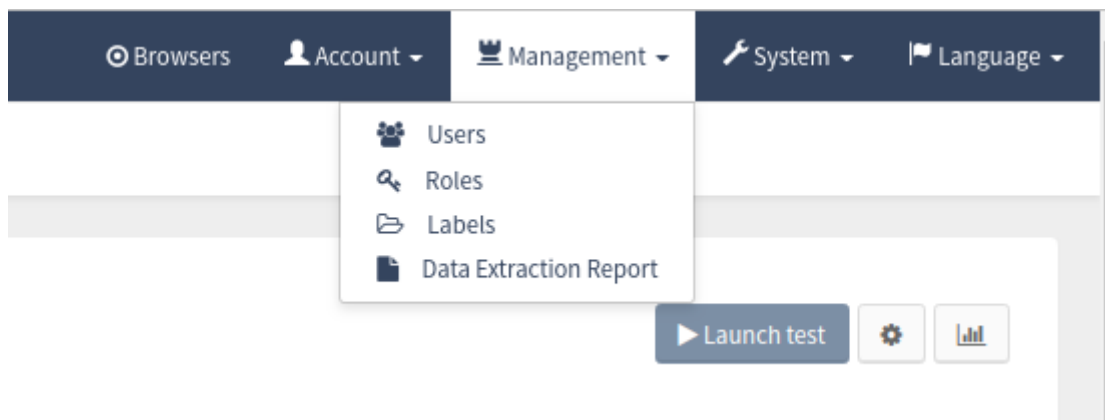

The Labels page is shown with all current labels. Edit, delete and create new ones if desired.

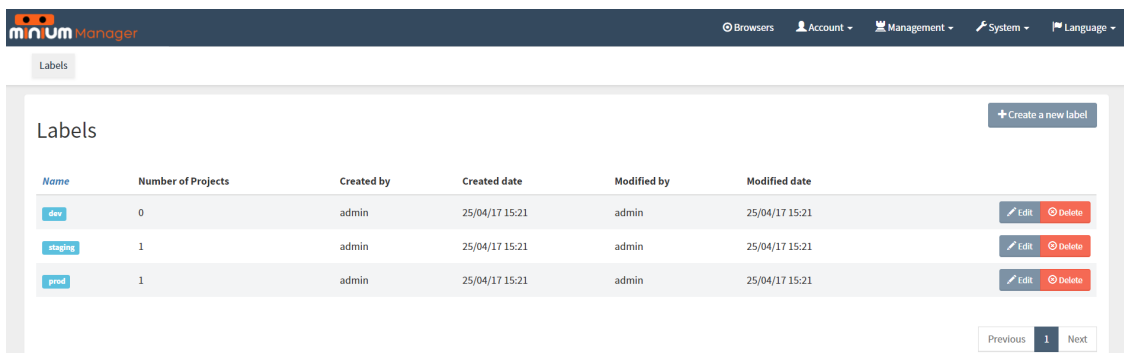


To create a new label, click on **Create a new label**. To delete or edit an existing label, click on **Edit** or **Delete** respectively.



The screenshot shows a dialog box titled "Create or edit a label" with a close button (X) in the top right corner. Below the title is a "Name" label followed by a text input field. At the bottom right, there are two buttons: "Save" with a download icon and "Cancel" with a close icon.


2.5.2. Assign labels to the projects

To assign some labels to a project, go to the project configurations:

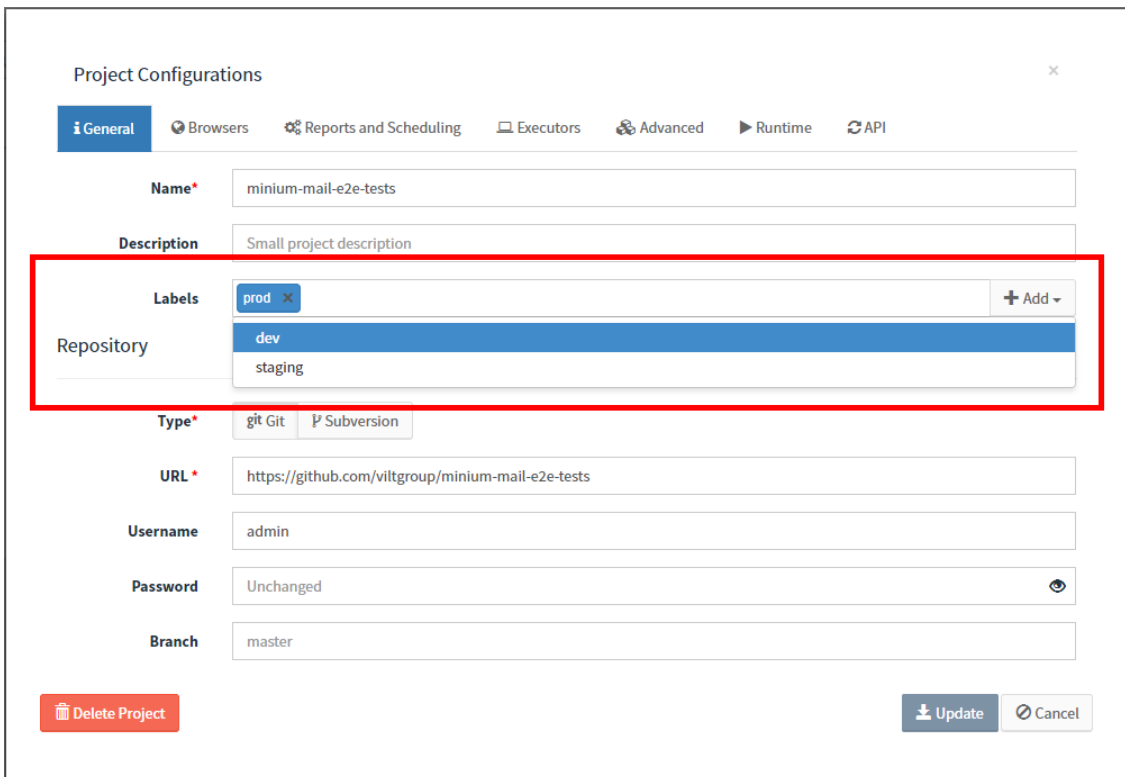

The screenshot shows the "Project Configurations" dialog box with several tabs: "General", "Browsers", "Reports and Scheduling", "Executors", "Advanced", "Runtime", and "API". The "General" tab is active. The "Name" field contains "minium-mail-e2e-tests" and the "Description" field contains "Small project description". The "Labels" section is highlighted with a red box and contains a list with "prod" (with a close icon) and "dev" (highlighted in blue), and a "+ Add" button. Below it, the "Repository" dropdown shows "staging". The "Type" section has "git Git" and "Subversion" options. The "URL" field contains "https://github.com/viltgroup/minium-mail-e2e-tests", "Username" is "admin", "Password" is "Unchanged" (with an eye icon), and "Branch" is "master". At the bottom, there is a "Delete Project" button and "Update" and "Cancel" buttons.

The Add button can be used to create new labels if needed.

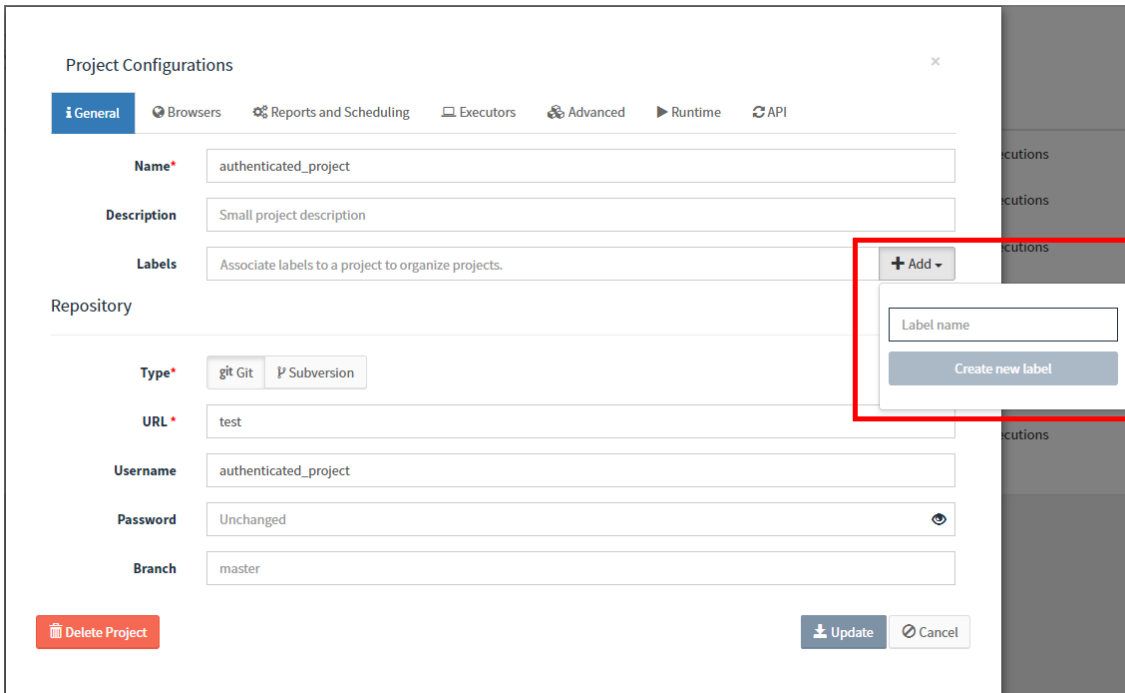


2.5.3. Manage groups

Groups are intended to organize projects at a higher level and to perform changes in several projects at a time.

Manage groups using LDAP authentication

If Minium Manager is using LDAP to manage the users, the groups are configured through the LDAP.

In the project configuration, search for groups. Below the permission table, start typing the name of the user or group. This will perform a search into the LDAP directory.

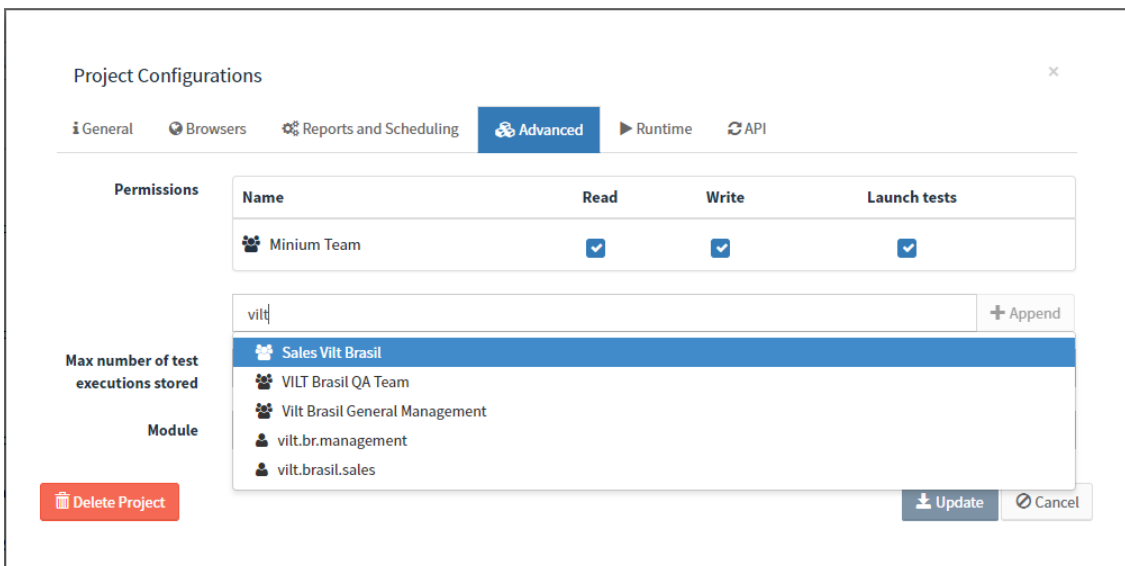


Manage groups without LDAP authentication

If Minium Manager is **not** using LDAP authentication, create new groups through the user management UI.



Note:

Only the users with `Admin` privileges are allowed to create groups.

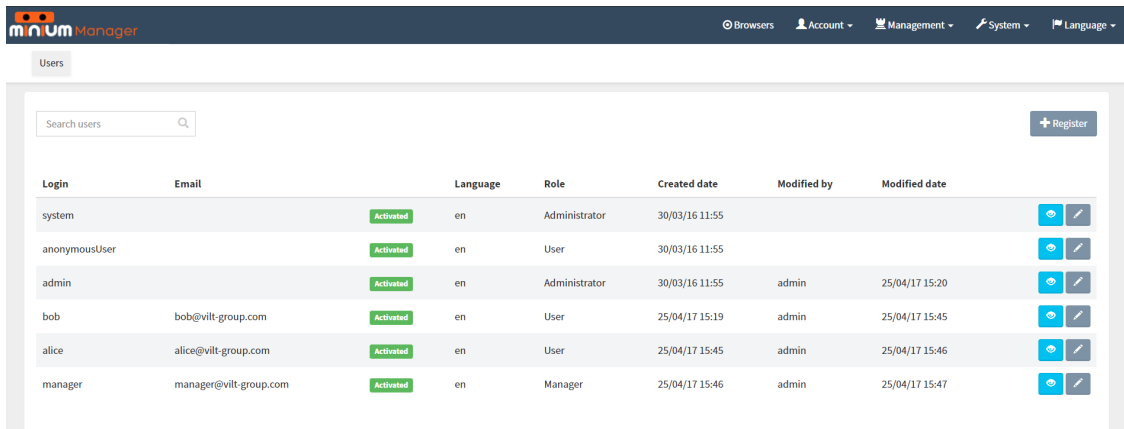

The screenshot shows the 'Users' management page in the Minium Manager interface. At the top, there is a navigation bar with the 'minium Manager' logo and several menu items: 'Browsers', 'Account', 'Management', 'System', and 'Language'. Below the navigation bar, there is a search bar labeled 'Search users' and a '+ Register' button. The main content area displays a table of users with the following columns: Login, Email, Language, Role, Created date, Modified by, and Modified date. Each row also includes a green 'Activated' status indicator and two icons (a blue eye and a pencil) for user management.

Login	Email	Language	Role	Created date	Modified by	Modified date
system		en	Administrator	30/03/16 11:55		
anonymousUser		en	User	30/03/16 11:55		
admin		en	Administrator	30/03/16 11:55	admin	25/04/17 15:20
bob	bob@vilt-group.com	en	User	25/04/17 15:19	admin	25/04/17 15:45
alice	alice@vilt-group.com	en	User	25/04/17 15:45	admin	25/04/17 15:46
manager	manager@vilt-group.com	en	Manager	25/04/17 15:46	admin	25/04/17 15:47

Create or edit a user
✕

Login

First name

Last name

Email

Activated

Language

Groups

managers.team ✕
minium.team ✕
eng.team ✕
qa.team ✕
+ Add ▾

Cancel

✔

Create

Login

E-mail

Groups

qa.team ✕
minium.team ✕
eng.team ✕
+ Add ▾

← Back
Register

✔

Create

If desired, add permissions to the group recently created in the project configuration. Below the permission table, start typing the name of the group created.



2.5.4. Organise Projects


Using **groups** and **labels** to organise the projects selecting a group and labels from the sidebar.




Select one **group** at a time, but select multiple **labels** and combine both.

In the case of the figure above, notice that the **group qa.team** is selected and two **labels** are also selected (**dev** and **staging**). With filters applied, exists one project shown in the project list.


This means that the one project belong to the **group qa.team** (see it in the figure below).

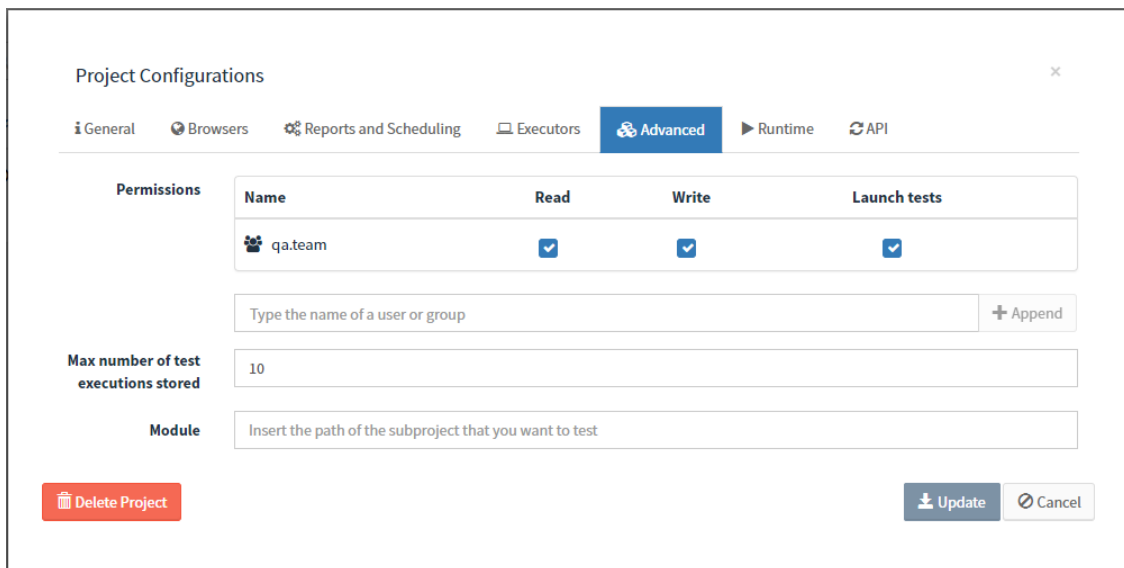

The project either has the **label dev** or **staging** associated with it in the project configuration (as shown in the figure below).

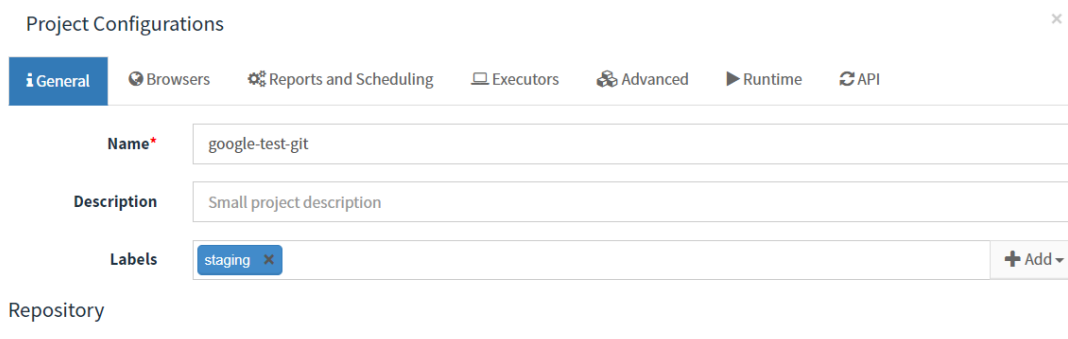


Select a **group** or **one or more label**, like shown in the figure below. In this specific case, are selected only the **label prod**, without selecting any group. It means that all the projects in the list have the **label prod** associated.

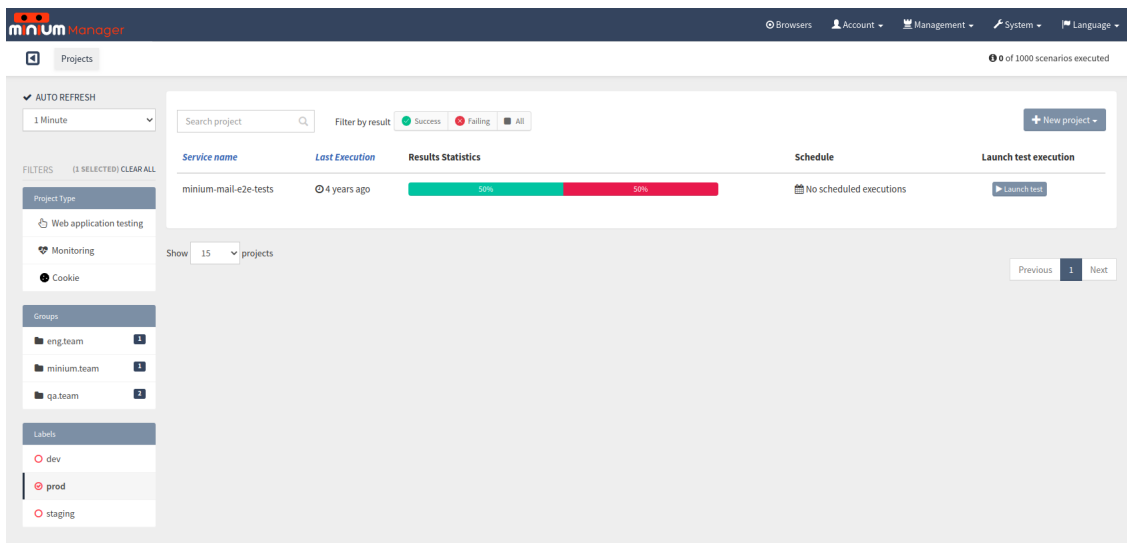


Clean project filters

By clicking on the link **CLEAR ALL**, it will remove all the selected filter.

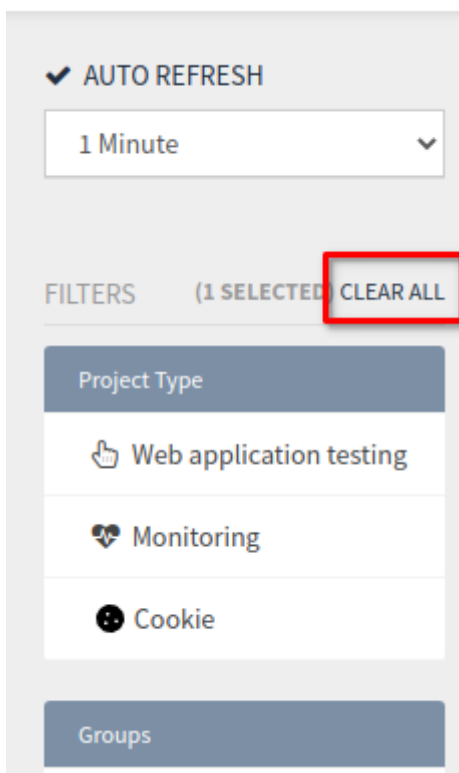

Project Type


We can filter the projects by its type. Select the project type(s) to filter the project list:

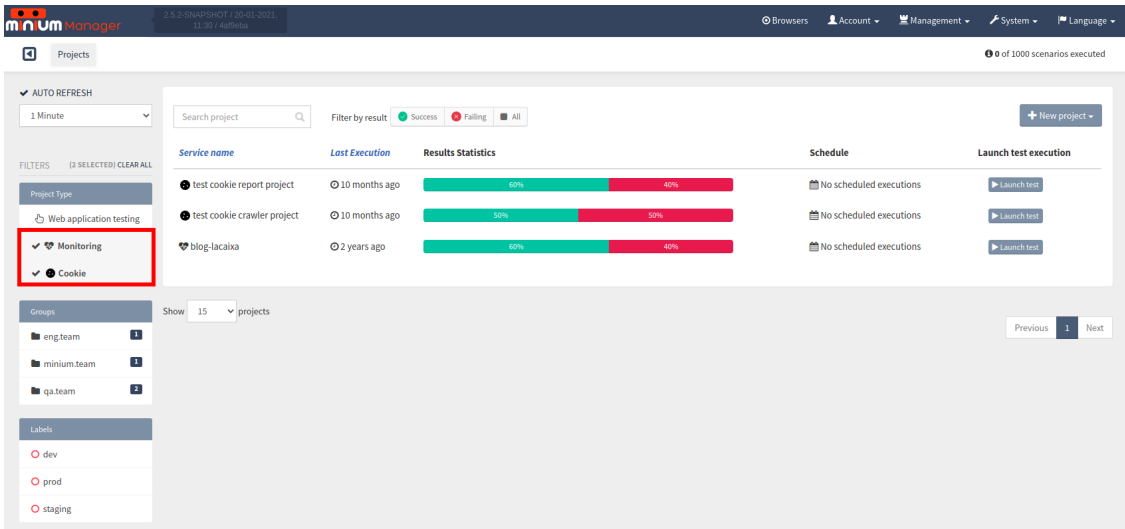

Auto Refresh

By default, the project page will be refreshed every minute. Also, you can configure the project page to refresh every 5 and 10 minutes.

To disable the auto refresh, just click on the link "AUTO REFRESH":

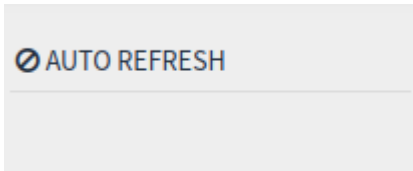


Note:



The link "AUTO REFRESH" with the ban icon, means that is disabled; The link "AUTO REFRESH" with the check icon, means that is enabled.

Filter by Results

Select the result status to filter the projects in the projects list:

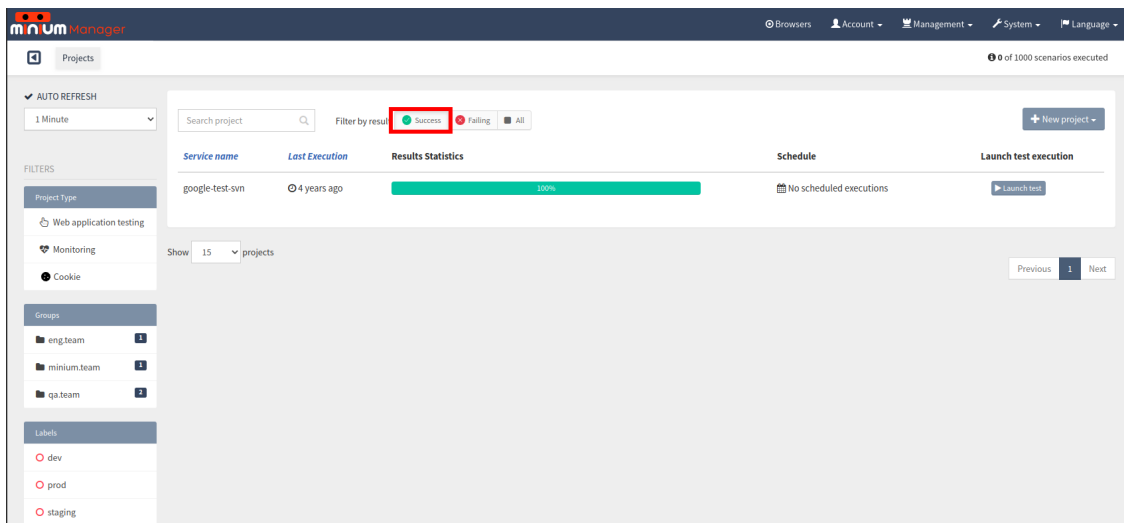

2.6. Configuration profiles


Configuration profiles can be defined on the `config/application.yml` of a project and used to load configuration properties that vary based on the environment being tested. Such a configuration could be for example the URL of the application or the language:

```
# default values
minium:
  config:
    baseUrl: http://localhost
    language: English
---
spring.profiles: qa
minium:
  config:
    baseUrl: http://staging
---
spring.profiles: es
minium:
  config:
    language: Spanish
```

These configuration properties can then be used on the step definitions like this:

```
When(/^I go to the homepage"$/, function() {
  browser.get(config.baseUrl);
  $(".dropdown").withText("Language").click();
  $(".dropdown a").withText(config.language).click();
});
```

Then to run test executions with the configuration properties of a profile, go to **Project Configurations** and add it to **Additional profiles**:

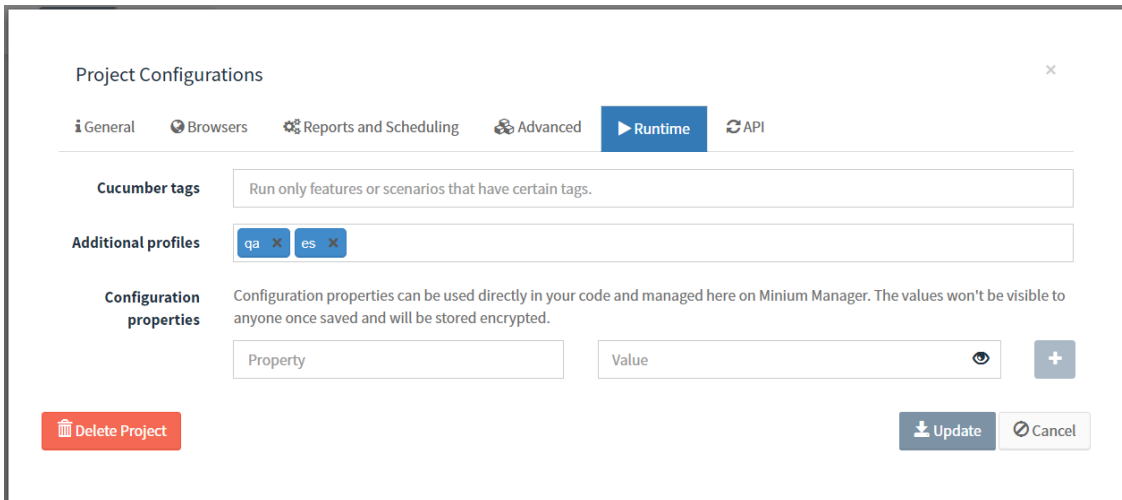

2.7. Secret configuration properties

Sensitive configuration properties that cannot be included on the repository of the tests can be safely stored on Minium Manager. They can be used just like the configuration properties defined on the `config/application.yml` file of the project. As an example, consider that some tests need to be executed against a production environment which requires a password that cannot be exposed on the code. In that case, only the password to be used on the test environment would be defined on the `config/application.yml` file:

```
minium:
  config:
    baseUrl: http://staging
    username: test
    password: minium

---


spring.profiles: prod

minium:
  config:
    baseUrl: https://production
    username: admin
```

Which would be accessible through the `config.password` during the tests:

```
When(/^I login"$/, function() {
  browser.get(config.baseUrl);
  $("text").fill(config.username);
  $("password").fill(config.password);
  $("submit").click();
});
```

The password to be used on the production environment would then be defined on the Project Configurations:

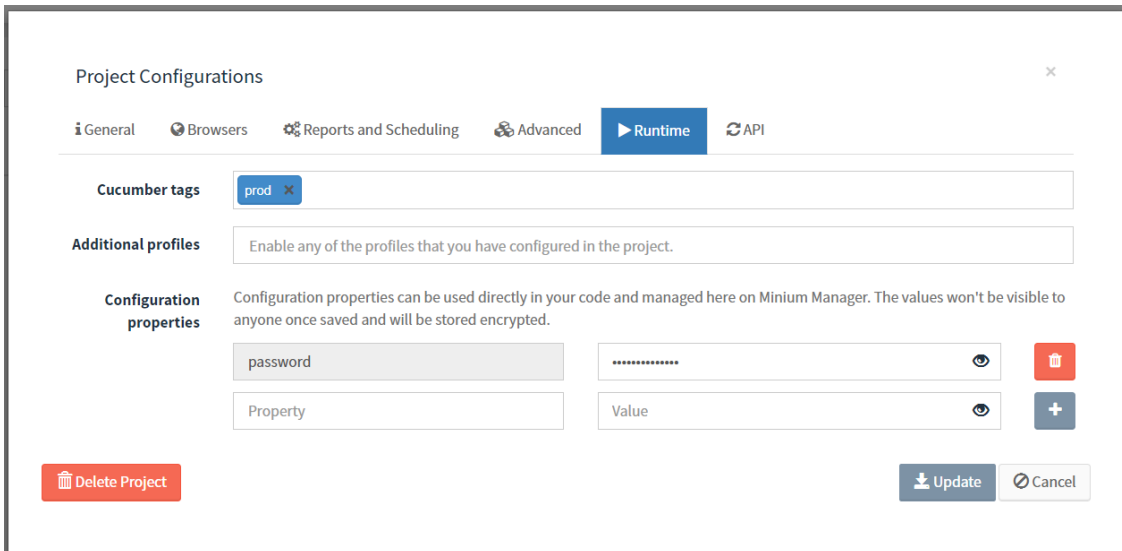

2.8. Add test information to Minium Manager Report (output)

We can add information of the test execution to the Minium Manager report by adding a simple minium instruction to the code of the Minium Project.

By add the minium expression `scenario.write(...)`; we are able to pass data to the Minium Manager report. E.g.:

```
Given(/^I open the site "([^"]*)"$/, function(url) {  
  browser.get(url);  
  scenario.write(browser.getCurrentUrl());  
  scenario.embed(browser.screenshot().asBytes(), "image/png");  
});
```

The previous script will generate the following output in the Minium Manager console:

Steps


1 Given I open the site "https://www.caixabank.es/apl/localizador/caixamaps/index_es.html" Success

Output(s):
https://www2.caixabank.es/apl/localizad...



On the PDF report:

Given I open the site
"https://www.caixabank.es/apl/localizador/caixamaps/index_es.html"
Output(s):
https://www2.caixabank.es/apl/localizador/caixamaps/index_es.html

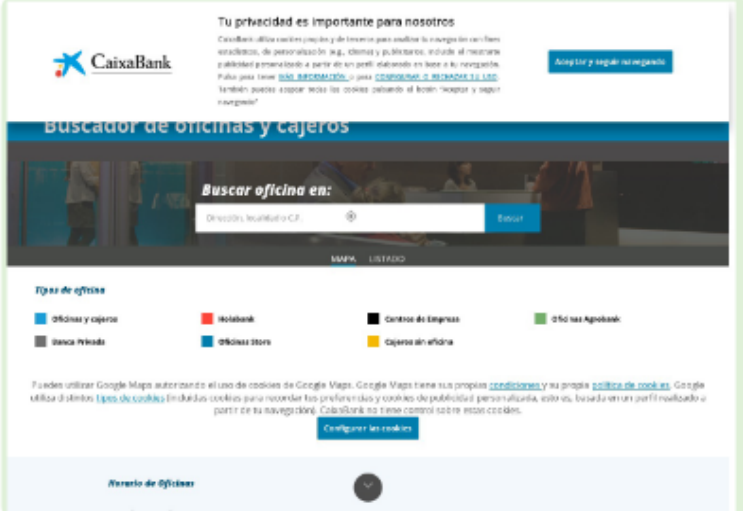

2.9. Delete a project

To delete a project, go to the project **configurations** and click on the button `Delete Project`, at the bottom-left corner:


Username

Password


Branch

2.10. Edit projects in batch


To edit projects in batch, click on the button `Edit multiple projects`:

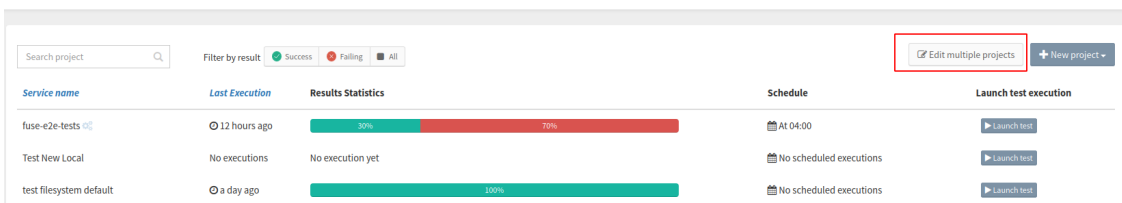

After the click, select the projects you want to edit and click on the button `Edit selected projects`:

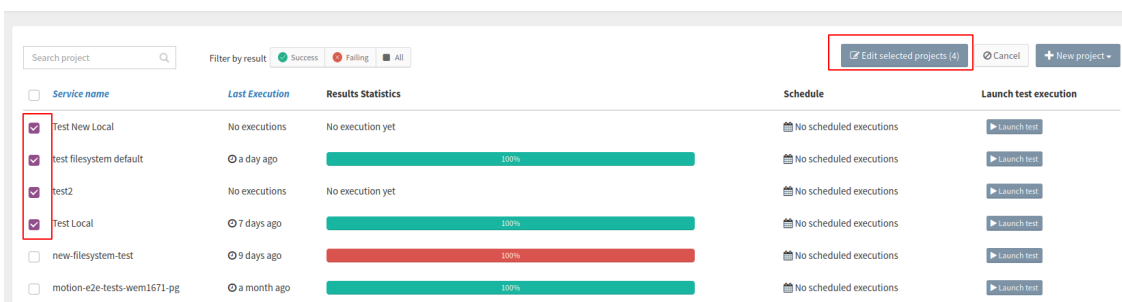

After, you can edit the common properties of the projects in the modal:

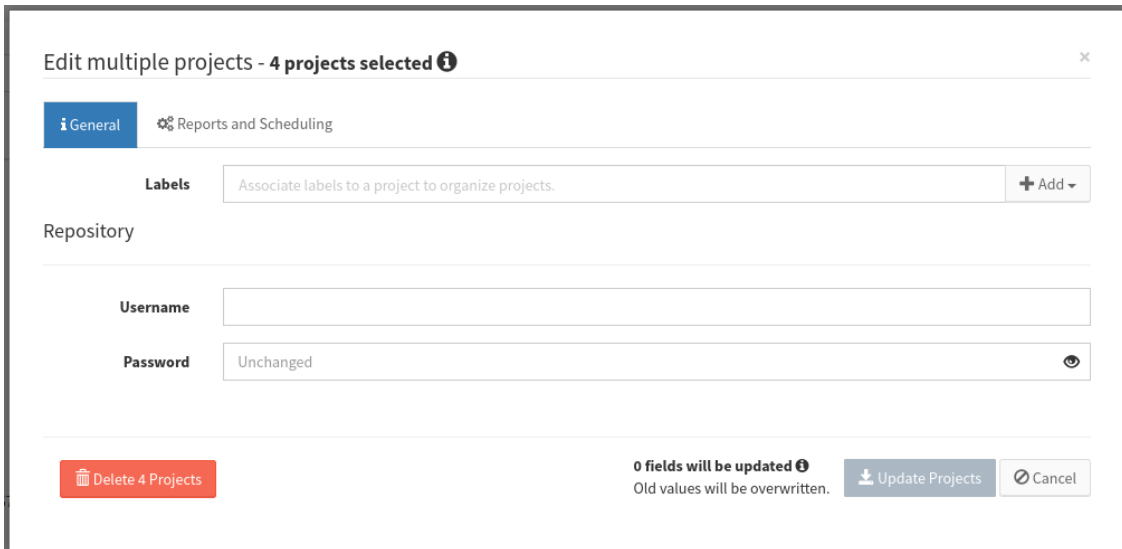

After the changes, click `Update Projects` to save the changes or `Cancel` to return to the projects page.


To stop the edit and deselect the projects, you can click `Cancel`:




Service name	Last Execution	Results Statistics	Schedule	Launch test execution
<input type="checkbox"/> fuse-e2e-tests	an hour ago	No results found	At 04:00	Launch test
<input type="checkbox"/> Test New Local	No executions	No execution yet	No scheduled executions	Launch test
<input type="checkbox"/> test filesystem default	a day ago	100%	No scheduled executions	Launch test
<input type="checkbox"/> test2	No executions	No execution yet	No scheduled executions	Launch test
<input type="checkbox"/> Test Local	7 days ago	100%	No scheduled executions	Launch test
<input type="checkbox"/> new-file-system-test	9 days ago	100%	No scheduled executions	Launch test

2.11. View Queue


To view the current queue of executions, click on the `Project Queue` under the navbar:

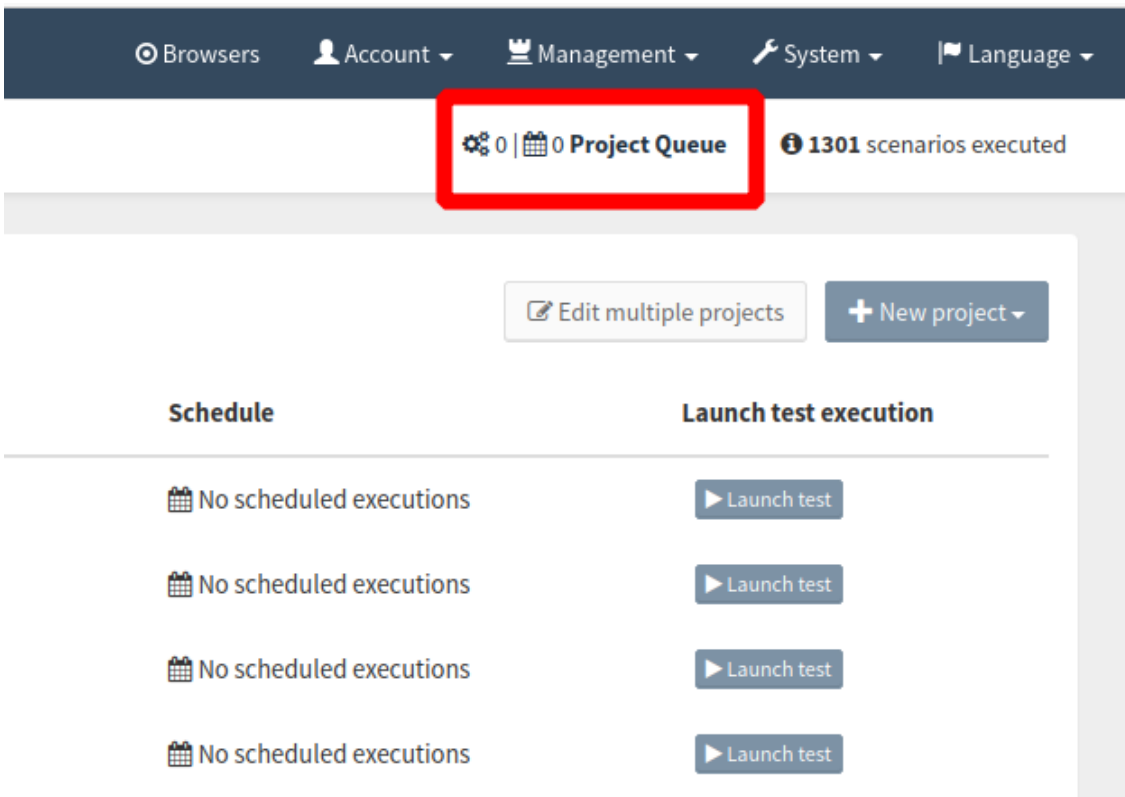

After the click, you can see the modal with the queue, with the projects `Running` and `In Queue`:

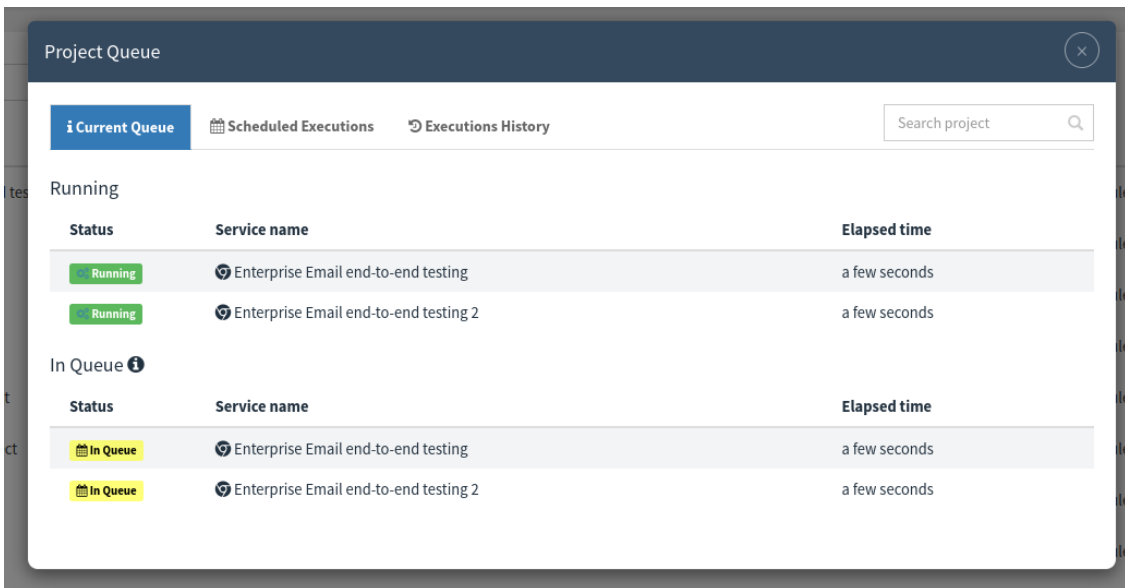

At the modal, we can also see the `Scheduled Executions` that will be executed in the future:

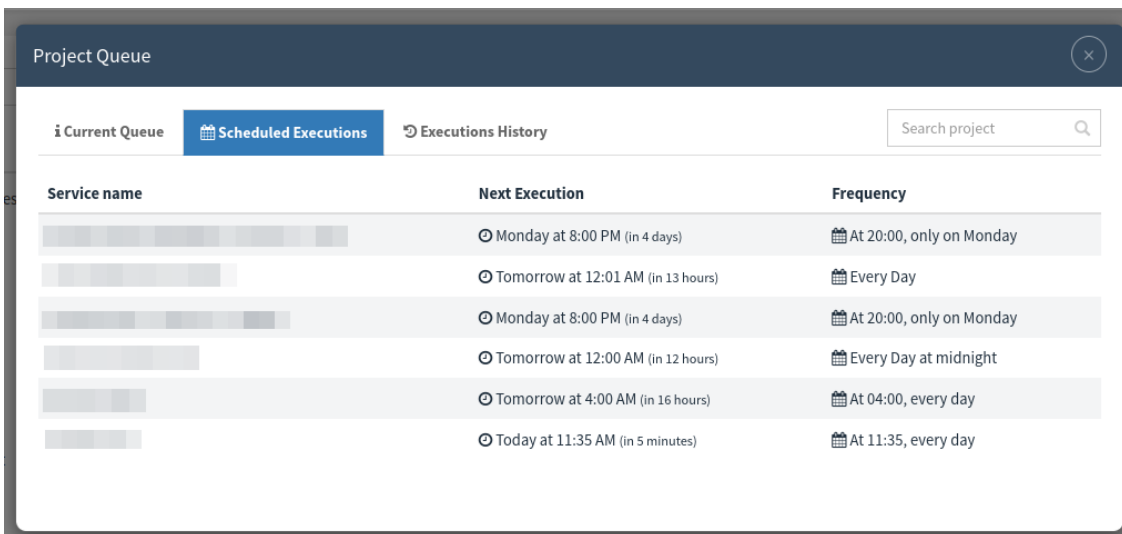


Project Queue

Current Queue | **Scheduled Executions** | Executions History

Search project

Service name	Next Execution	Frequency
[blurred]	Monday at 8:00 PM (in 4 days)	At 20:00, only on Monday
[blurred]	Tomorrow at 12:01 AM (in 13 hours)	Every Day
[blurred]	Monday at 8:00 PM (in 4 days)	At 20:00, only on Monday
[blurred]	Tomorrow at 12:00 AM (in 12 hours)	Every Day at midnight
[blurred]	Tomorrow at 4:00 AM (in 16 hours)	At 04:00, every day
[blurred]	Today at 11:35 AM (in 5 minutes)	At 11:35, every day

Also, the `Executions History` for the projects:

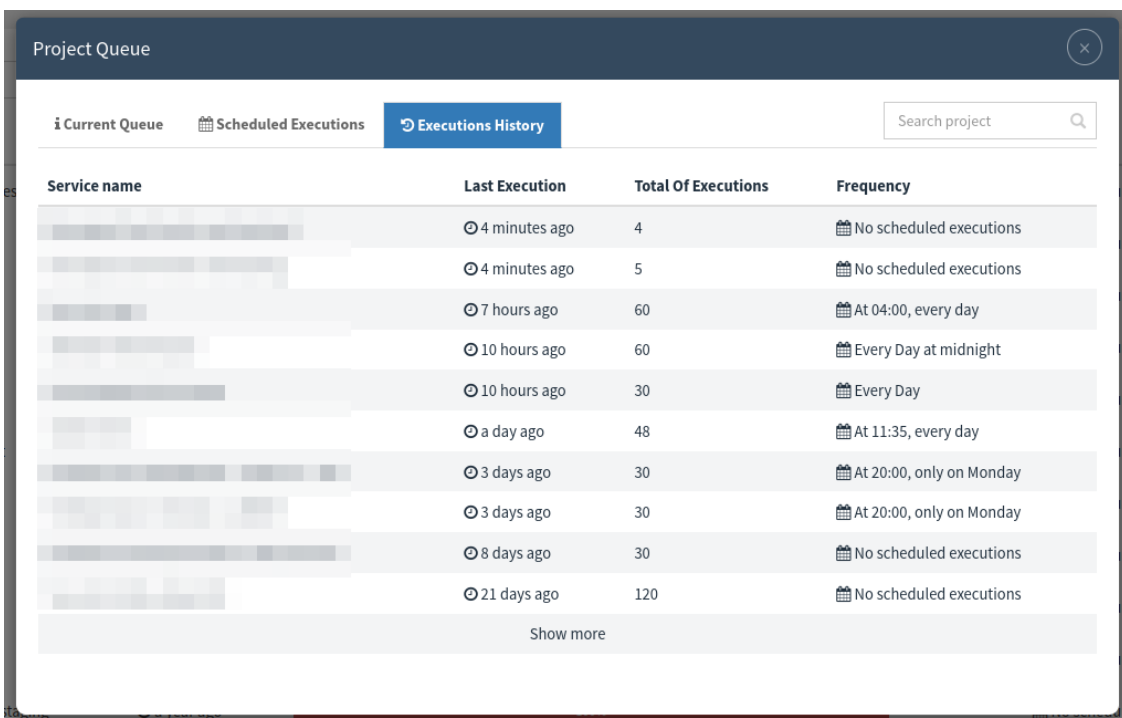

Project Queue

Current Queue | Scheduled Executions | **Executions History**

Search project

Service name	Last Execution	Total Of Executions	Frequency
[blurred]	4 minutes ago	4	No scheduled executions
[blurred]	4 minutes ago	5	No scheduled executions
[blurred]	7 hours ago	60	At 04:00, every day
[blurred]	10 hours ago	60	Every Day at midnight
[blurred]	10 hours ago	30	Every Day
[blurred]	a day ago	48	At 11:35, every day
[blurred]	3 days ago	30	At 20:00, only on Monday
[blurred]	3 days ago	30	At 20:00, only on Monday
[blurred]	8 days ago	30	No scheduled executions
[blurred]	21 days ago	120	No scheduled executions

Show more

2.12. Edit project code (Projects in filesystem only)

If the project is configured with the repository type `File System`, after the upload, we can edit the code of the Minium project.

The editor can be opened through several shortcuts:

At Project Configurations by clicking at the button `Edit`:

Project Configurations for **google-test-file-system** ✕

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

General | Browsers | Reports and Scheduling | Advanced | Runtime | API

Name*

Description

Labels + Add ▾

Repository

Type* git Git Subversion File System

Code No file selected.

At Executions page by clicking at the button `Edit`, at the feature shortcuts (at `web application testing` project) and at the scenario and step shortcuts (at `monitoring` and `cookie report` project):

utions (Total: 1) ▶ Launch test | | ⌵

result ● Success ● Failing ■ All

Results	Name	Duration	%	Browsers/Devices	Time
✕	google-test-file-system #1	a minute	<div style="width: 100%; background-color: red;">100%</div>	1M	4 minutes ago


ecution #1

Status	Feature	Result	Passing / Failing	Filters by browser	Duration
✕	Links results in Google with Dynamic Data <input style="border: 2px solid red;" type="button" value="Edit"/>	Chrome ●	✓ 0 / ✕ 5		a few seconds
✕	Minium Manager <input type="button" value="Edit"/>	Chrome ●	✓ 0 / ✕ 1		a few seconds
✕	Search results in Google Test <input type="button" value="Edit"/>	Chrome ●	✓ 0 / ✕ 4		a few seconds

Download report

Executions Previous | 1 | Next

Interval: **Not defined**
Last execution
25 March 21 10:57:06



[Launch test](#)
[Statistics](#)
[Edit](#)
[Settings](#)

Filter by result: Success Failing All

Results	Time	Duration	%	Scenarios
25-03-2021 10:57:06	2 minutes	63%	37%	8

Execution #1

Scenarios	Performance	URL Status
1 Feature Simple test Simple test 0 Step 1: I'm at http://www.google.pt http://www.google.pt Step 2: I always pass	2.75 seconds	OK
2 Feature Simple test Simple test 1 Step 1: I'm at http://www.google.pt http://www.google.pt Step 2: I see the main page	7.16 seconds	OK

And at the Feature page, at the feature, scenario, step, and the links at the error message will have a shortcut to the editor:

Feature Simple test

Filters: Success Failing All

Scenarios


- Simple test 0
- Simple test 1**
- Simple test 2
- Simple test 3
- Simple test 4
- Little description here
- Little description

Then I see the main page **Failed**



```
org.mozilla.javascript.JavaScriptException: Error: expected S("Q8RLc").withText("Port
at steps/performance-steps.js in line 8
at Then I see the main page at Features/performance.feature in line 12
```

After click on the button or the shortcut to the editor, a new tab will open with the code of the project.

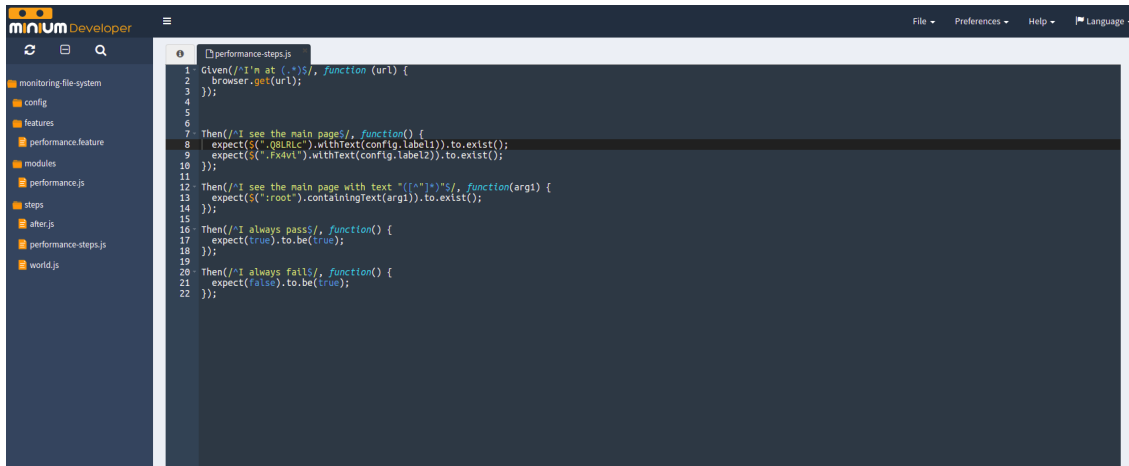

```
1 Given(/^I'm at (.*)$/, function (url) {
2   browser.get(url);
3 });
4
5
6
7 Then(/^I see the main page$/, function() {
8   expect($('qblRLC').withText(config.label1).to.exist();
9   expect($('p>next').withText(config.label2).to.exist();
10 });
11
12 Then(/^I see the main page with text "(.*)"$/, function(arg1) {
13   expect($('root').containingText(arg1).to.exist();
14 });
15
16 Then(/^I always pass$/, function() {
17   expect(true).to.be(true);
18 });
19
20 Then(/^I always fails$/, function() {
21   expect('also').to.be(true);
22 });
```

In the editor, we can update the code of the minium project. after the changes, the editor can be closed.




Note:

The recorded changes will be reflected in the minium manager.

2.13. Check the available browsers

To check the available browsers, click on **Browsers**, at the navigation bar.

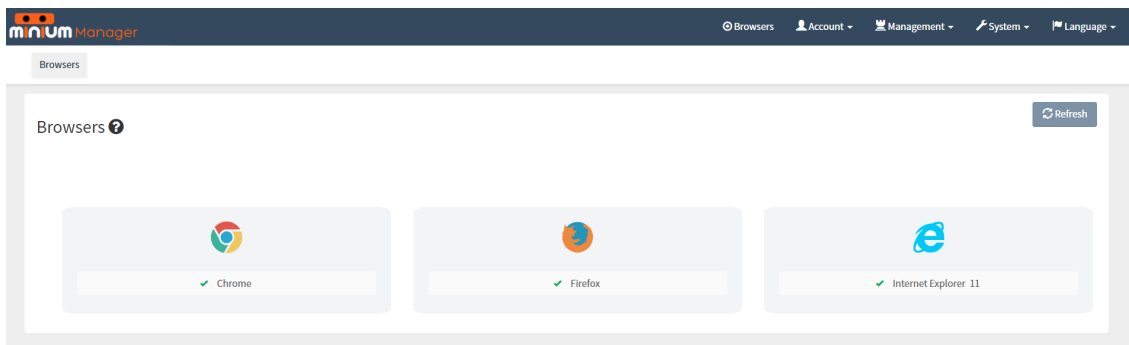


In the figure above, we only have one provider available, but we can have two or more providers configured (e.g. "BrowserStack" and/or "Selenium Grid Extras"). The provider configured has the browsers Chrome, Firefox and Internet Explorer available.


This means that with this environment is able to run the tests in Chrome, Firefox and Internet Explorer at the provider configured.

2.14. Project Statistics

Evolution chart to the test executions of a project.

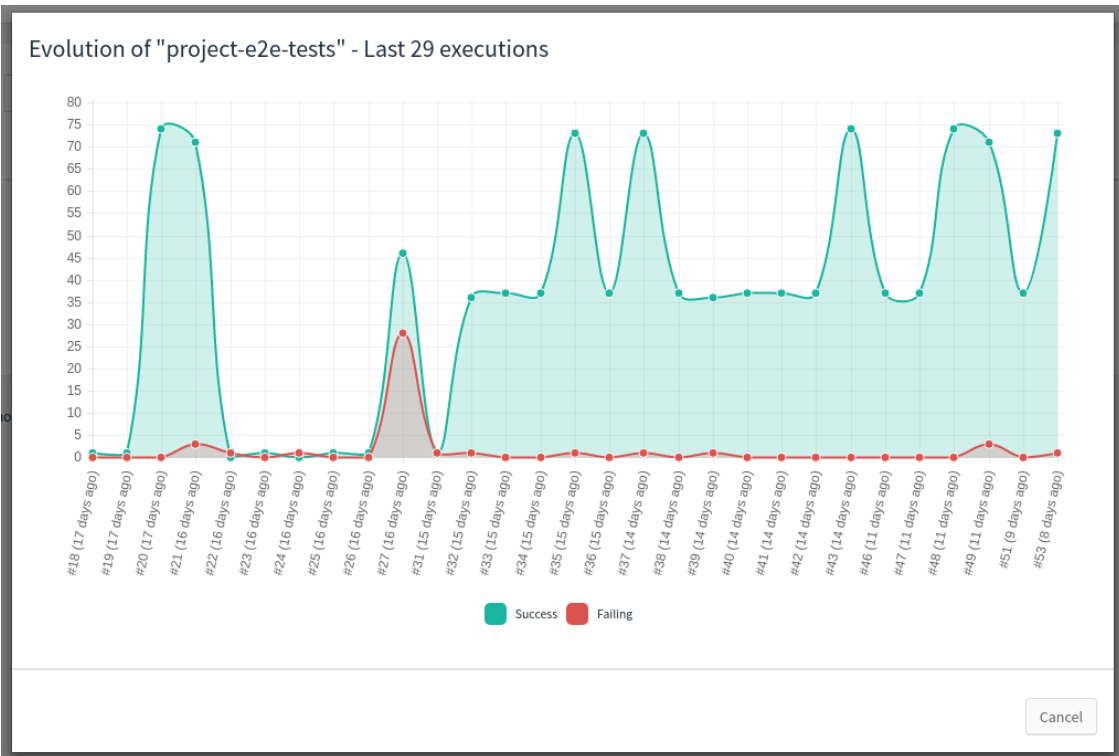

Statistics for a single execution.

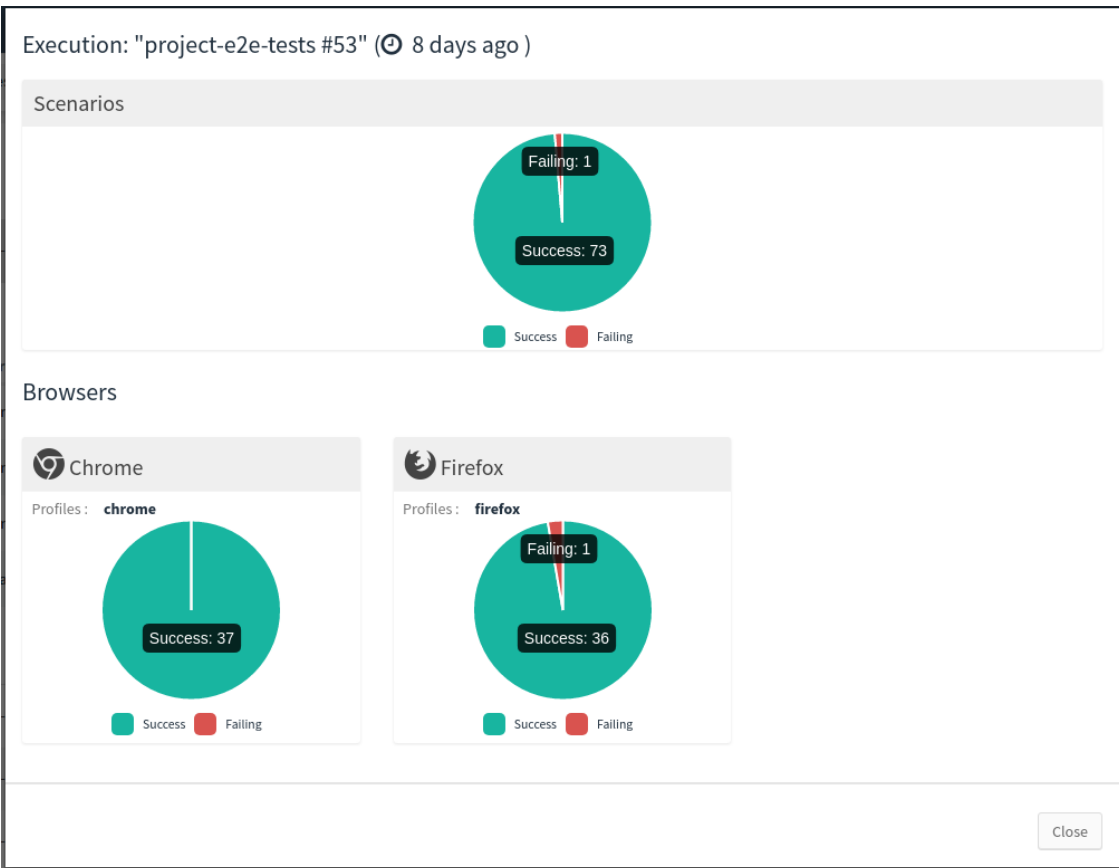


3. Test executions

3.1. Launch test executions

A test execution will execute the tests present in a project on one or more different browsers. There are alternative ways for launching test executions.

3.1.1. Launch a test execution manually


On the homepage or the page of a project, click on button `Launch test`, which opens a modal for selecting the browsers.

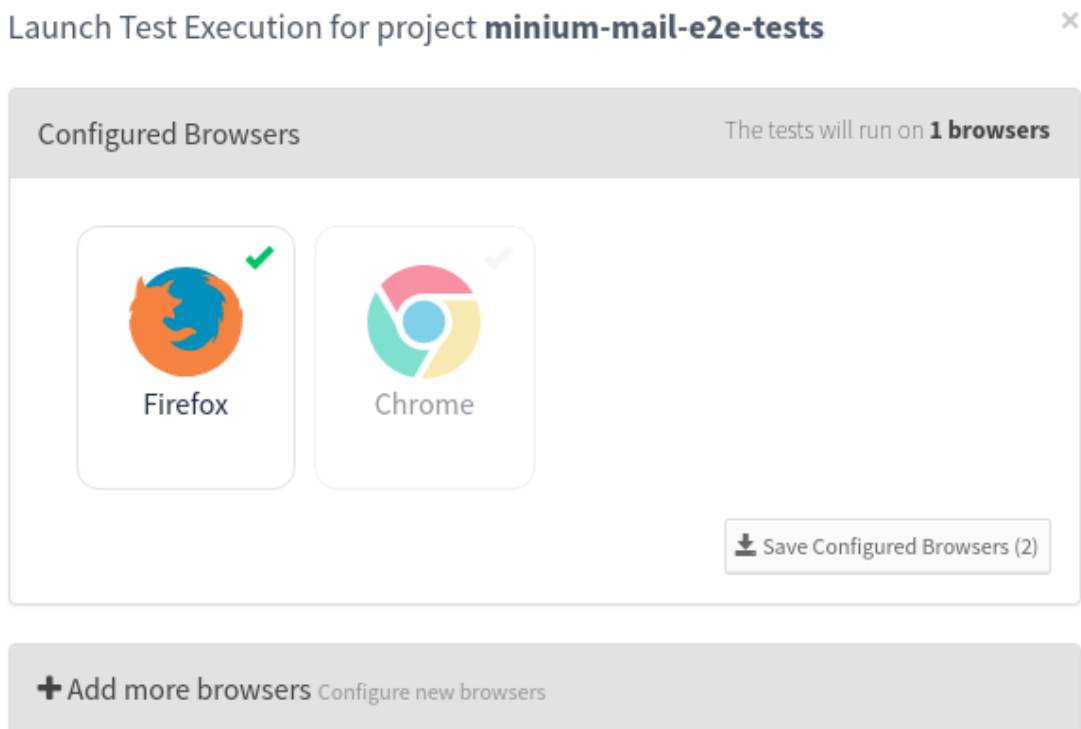

Select the desired browsers by clicking on them. If needed, click on `Add more browsers` to expand the available browsers and select a browser (and the properties) and/or the mobile devices (emulated via chrome).

After, click `Add browser` or `Add device` (for mobile devices).

Then, click on `Add browser`.

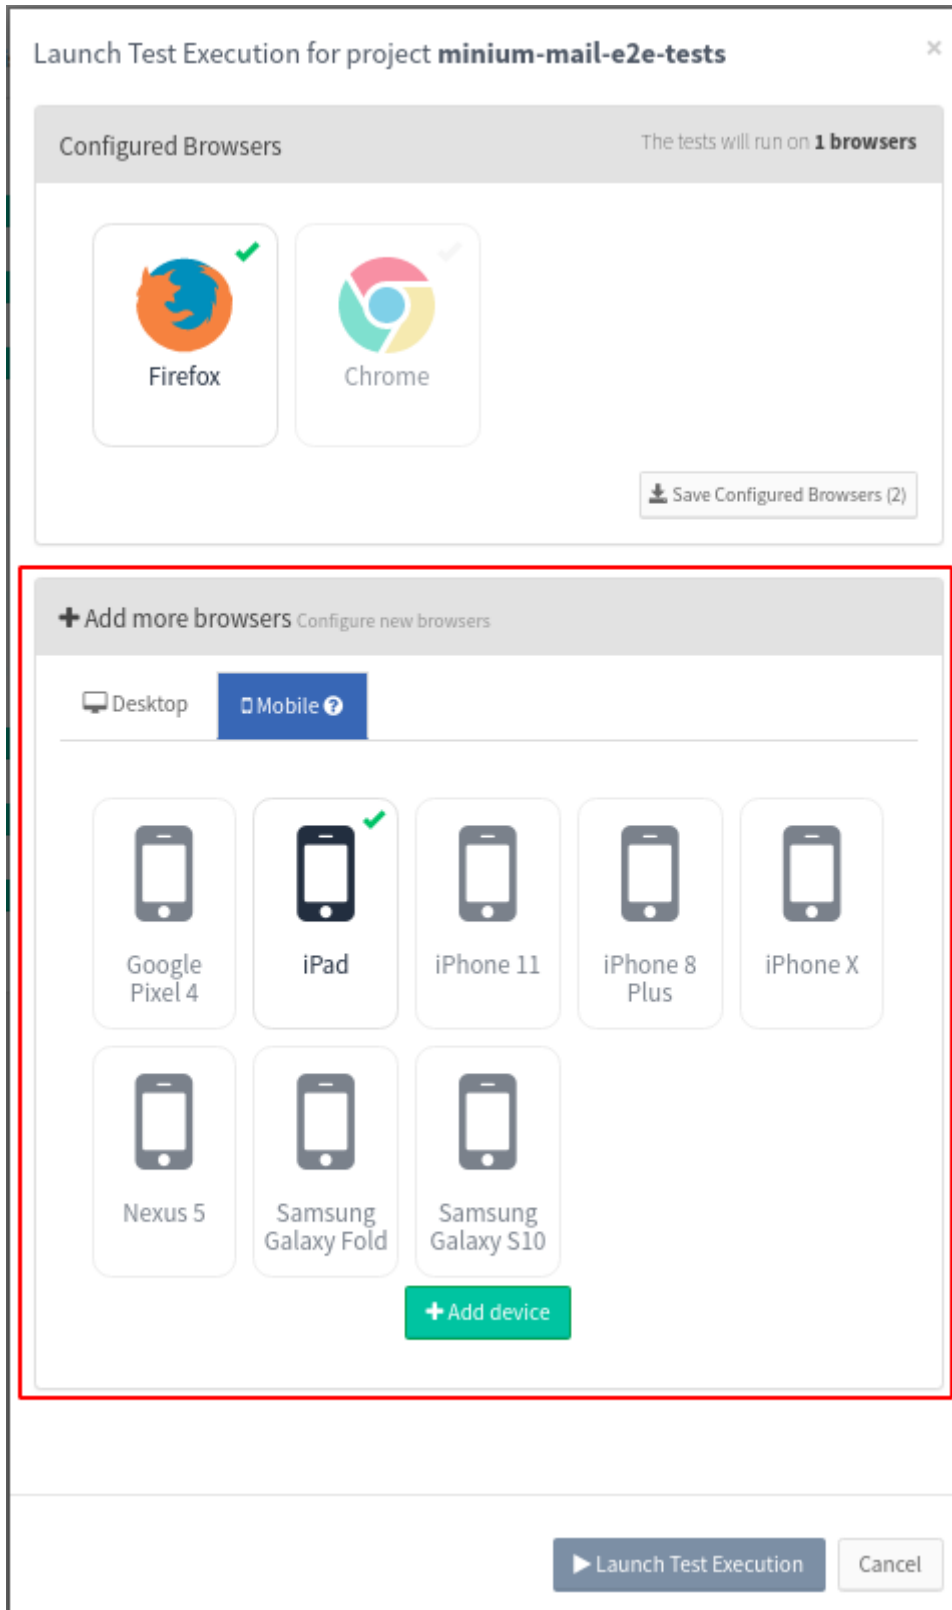

The new browser is now available to be selected on the `Configured Browsers`.

To save the current browser(s) configured to the project configurations, click `Save Configured`

`Browsers` to persist the browser configured. Next time you open the launch modal it will show the `Configured Browsers` saved. Also, the executions created by the scheduler, will use the configuration saved.

After selecting all the browsers, click on `Launch Test Execution`.




Note:

At the click on button `Launch test`, the Monitoring and Cookie projects don't open a modal for selecting the browsers. It launches a test immediately.

3.1.2. Schedule test executions

Go the configurations of a project and open the `Browsers` tab to see the currently configured browsers.

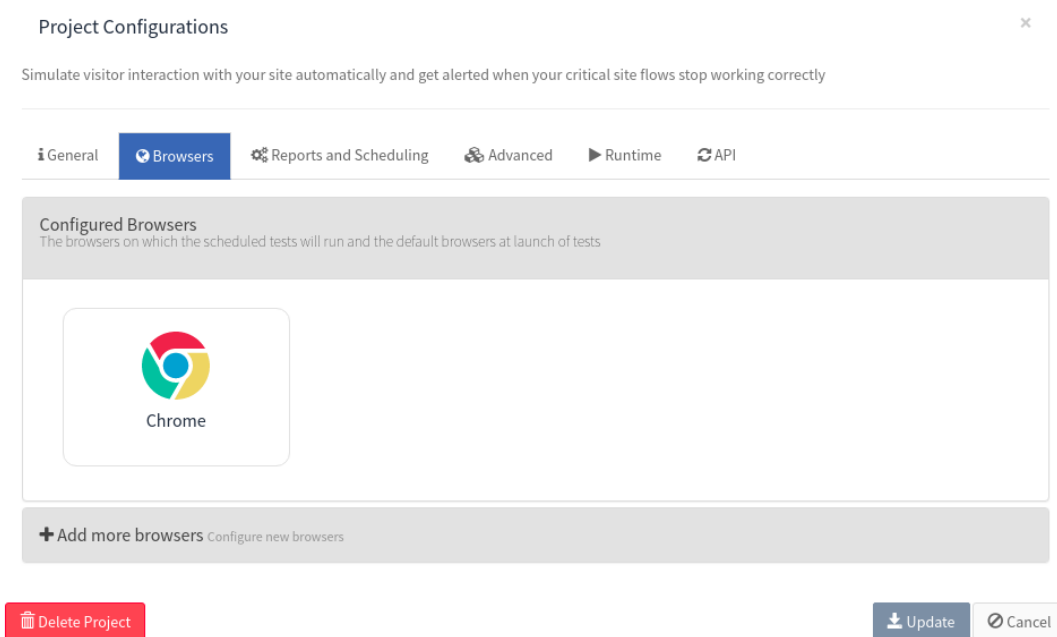


Click on `Add more browsers` and add more browsers if needed.

Project Configurations
✕

Simulate visitor interaction with your site automatically and get alerted when your critical site flows stop working correctly

General
Browsers
Reports and Scheduling
Advanced
▶ Runtime
API



Configured Browsers
The browsers on which the scheduled tests will run and the default browsers at launch of tests



Chrome

+ Add more browsers Configure new browsers

Desktop
Mobile

Browser	Platform	Version
	Any	Any
	LINUX	81.0.1

+ Add browser

Delete Project
Update
Cancel

To schedule test executions on the configured browsers, switch to the `Reports and Scheduling` tab.

Scheduling

Scheduler

Never run

Every Month

Cron Expression

Every Day

Every Day at midnight

Every Week

Custom

Scheduler Custom Configurations At 00:00

Every: at :


3.1.3. REST API

Minium Manager provides a REST API through which it is possible to launch test executions

and get test results. In order to use it, an API key is required. API key are specific of a project. To generate a key, go to the [API](#) tab on the configurations of a project and click on the [Generate](#) button.



Also, on the [API](#) tab are some example scripts. Once the project has an API key, the scripts will be fulfilled with the project-specific data and ready to use. The first part of the script shows how to launch a test execution.

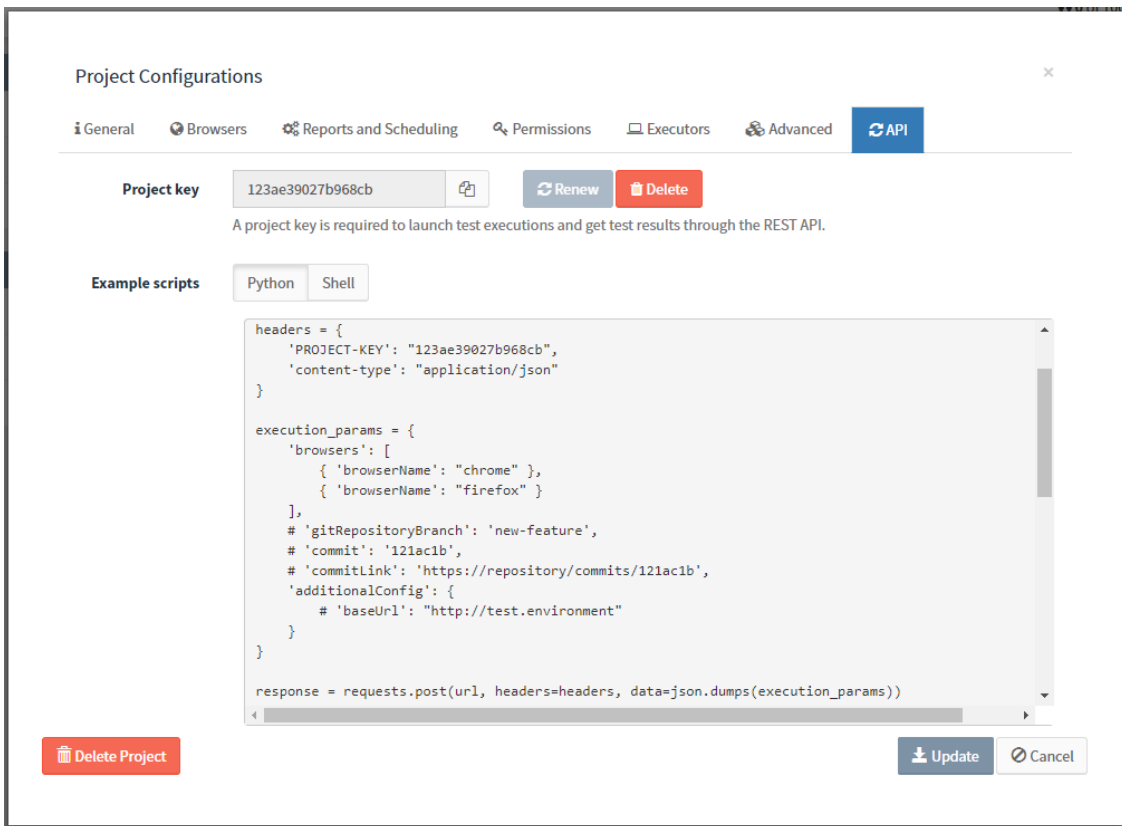

A test execution can be launched by issuing a `POST` request to `api/projects/<PROJECT-ID>/test-executions` containing the `PROJECT-KEY` header set to the project key, and the `content-type` header set to `application/json`. The execution parameters are sent in JSON on the request body:

- **browsers**: list containing the capabilities of the browsers. Only the `browserName` is mandatory.
- **additionalConfig** (optional): configuration properties to be merged with the ones on the `application.yml` file of the project. Properties already defined on the `application.yml` file are overridden.
- **gitRepositoryBranch** (optional): branch of the repository of the tests.
- **commit** (optional): the corresponding commit of the system under test, to be then included on the report of the execution.
- **commitLink** (optional): link to directly access the commit from Minium Manager.

To follow the progress of the execution until it finishes, poll the URL returned on the `Location` header of the response to the `POST` request.

```
url = response.headers['location']
response = requests.get(url, headers=headers)
while response.status_code == 404:
    time.sleep(5)
    response = requests.get(url, headers=headers)
if not response.ok: sys.exit(response.text)

execution = response.json()
while execution['state'] != "FINISHED":
    time.sleep(15)
    execution = requests.get(url, headers=headers).json()
```

While the tests are running, the response will be a JSON object containing the `state` field set to `RUNNING`, the name of the current browser and the corresponding progress in percentage, number of passed/failed and last finished feature/scenario. Example:

```
{
  "state": "RUNNING",
  "browser": "chrome",
  "progressInPercentage": 18,
  "failingScenariosCount": 1,
  "passingScenariosCount": 5,
  "feature": "Login",
  "scenario": "Successful login"
}
```

Once the execution finishes, the response will have `state FINISHED`, the global results and the number of passed/failed scenarios for each browser. Example:

```
{
  "state": "FINISHED",
  "globalResults": {
    "totalScenarios": 20,
    "percentageOfPassingScenarios": 95,
    "passingScenarios": 19,
    "failingScenarios": 1
  },
  "browserResults": [
    {
      "browser": {
        "browserName": "chrome"
      },
      "passedScenarios": 10,
      "failedScenarios": 0
    },
    {
      "browser": {
        "browserName": "firefox"
      },
      "passedScenarios": 9,
      "failedScenarios": 1
    }
  ]
}
```


3.2. Follow the progress of a test execution

After launching a test execution, follow the progress in the project page. See the browser where the test is executing, the percentage, number of executed tests, the elapsed time and the test that is currently executing.



4. Monitor test results

In a project page, all the launched executions are showed:

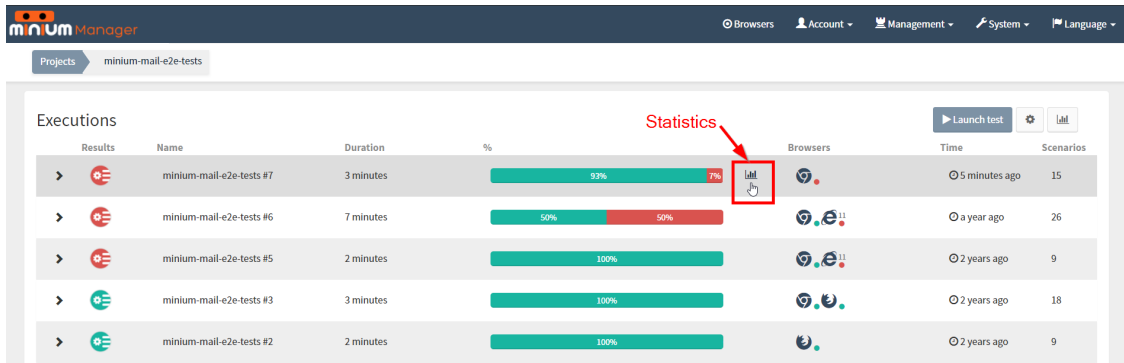


Results	Name	Duration	%	Browsers	Time	Scenarios
>	minium-mail-e2e-tests #7	3 minutes	93% 7%	🌐	🕒 5 minutes ago	15
>	minium-mail-e2e-tests #6	7 minutes	50% 50%	🌐 🌐	🕒 a year ago	26
>	minium-mail-e2e-tests #5	2 minutes	100%	🌐 🌐	🕒 2 years ago	9
>	minium-mail-e2e-tests #3	3 minutes	100%	🌐 🌐	🕒 2 years ago	18
>	minium-mail-e2e-tests #2	2 minutes	100%	🌐	🕒 2 years ago	9

For each execution it can be seen:

- result of the execution
- name
- duration of execution
- percentage of passed and failing scenarios
- statistics of the execution (shown when the mouse is over the execution)
- browser where the execution ran
- launch time
- number of scenarios of the execution

When expands a test execution a list of executed features, and their results can be seen:

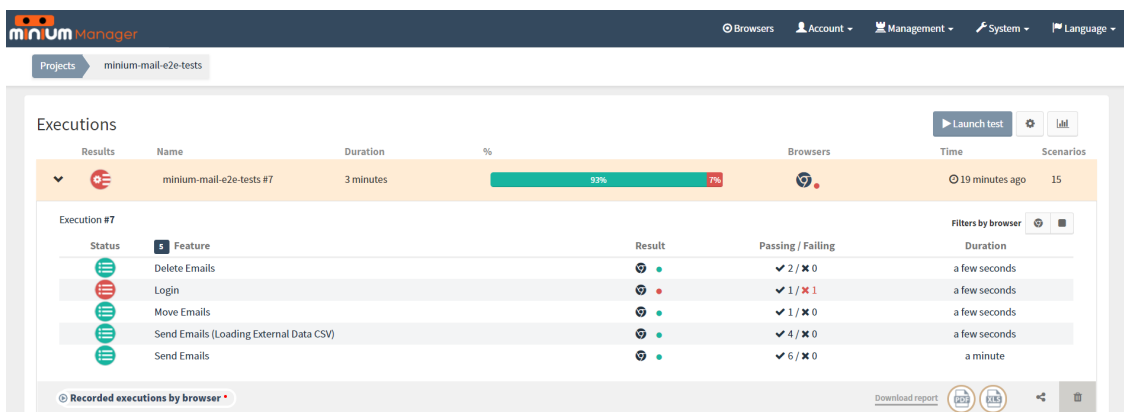

Status	Feature	Result	Passing / Failing	Duration
🟢	Delete Emails	🟢	✓ 2 / ✗ 0	a few seconds
🟢	Login	🟢	✓ 1 / ✗ 1	a few seconds
🟢	Move Emails	🟢	✓ 1 / ✗ 0	a few seconds
🟢	Send Emails (Loading External Data CSV)	🟢	✓ 4 / ✗ 0	a few seconds
🟢	Send Emails	🟢	✓ 6 / ✗ 0	a minute

For the execution expanded it can be seen:

- features tested
- the results detailed for each feature (with filters)
- videos of the execution

- download the report of the executions (MS excel and PDF)
- remove execution

Click at "Recorded executions by browser" to see the videos of the recorded executions:




For the videos (at execution) it can be seen:

- videos for the browsers tested
- features to navigate through the video
- cue points when the feature starts on the video

Monitoring project

The result of an execution of a Monitoring project is presented at the execution page:

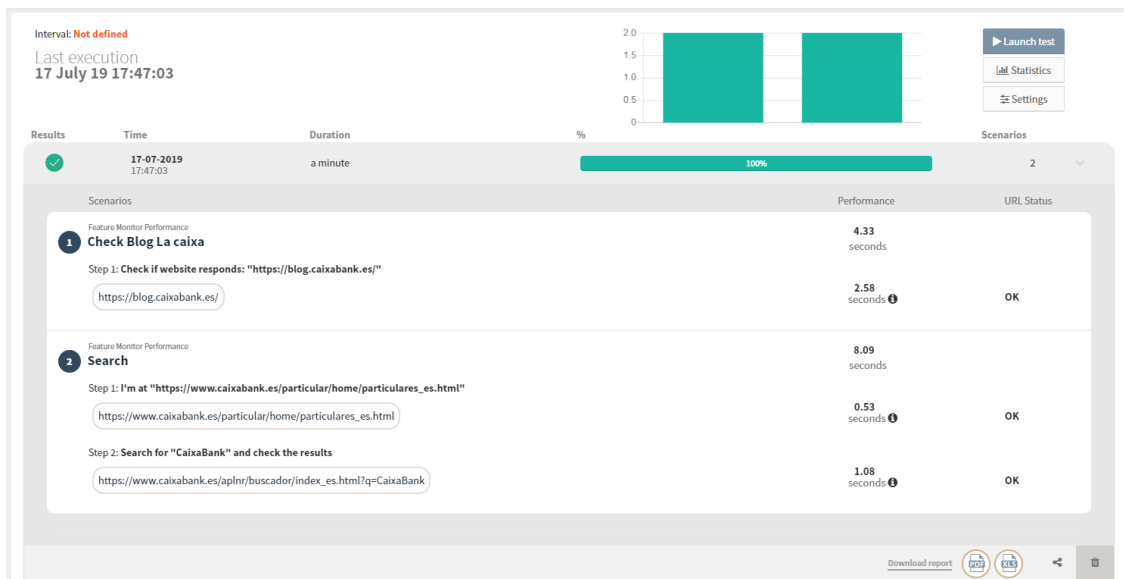

At execution page, we can see the time of each URL took to load. Also, we can see the URL status, and the time it took to execute the scenario.

Display options

The information at the execution page can be filtered to show/hide some details.

To open the `Display options` click at `Settings`:



The display options allow us to:


- Show/Hide the URL's
- Show/Hide the steps
- Show only the failed scenarios
- Consult the URL loading time threshold (This property is configured at the project configurations at the advanced tab and warns the user (at the execution page) when the loading time of a URL is higher than the loading time threshold)
- Consult the scheduler (The scheduled is configured at the project configurations at the reports and scheduling tab)

Cookie project

The Cookie project is divided in two projects: Cookie Report project and Cookie Crawler project.

Cookie Report project

The result of an execution of a Cookie Report project is presented at the execution page:

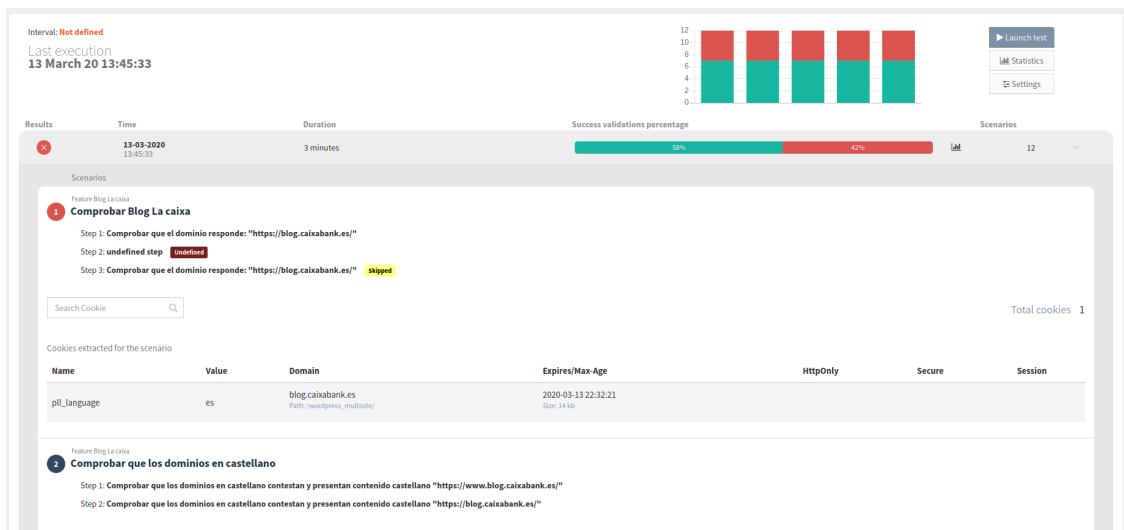

Interval: **Not defined**
Last execution: 13 March 20 13:45:33

Results: 13-03-2020 13:45:33 | Duration: 3 minutes | Success validations percentage: 58% (58%) / 42% (42%) | Scenarios: 12

Scenario 1: **Comprobar Blog La caixa**
 Step 1: Comprobar que el dominio responde: "https://blog.caixabank.es/"
 Step 2: **undefined step** (undefined)
 Step 3: Comprobar que el dominio responde: "https://blog.caixabank.es/" (skipped)

Search Cookie: Total cookies: 1

Name	Value	Domain	Expires/Max-Age	HttpOnly	Secure	Session
ptL_language	es	blog.caixabank.es <small>Path: /wordpress_multisite/</small>	2020-03-13 22:32:21 <small>Size: 14 kb</small>			


Scenario 2: **Comprobar que los dominios en castellano**
 Step 1: Comprobar que los dominios en castellano contestan y presentan contenido castellano "https://www.blog.caixabank.es/"
 Step 2: Comprobar que los dominios en castellano contestan y presentan contenido castellano "https://blog.caixabank.es/"

At execution page, we can see at the end of each scenario a table (with a filter) of all browser cookies at the end of a scenario.

Display options

The information at the execution page can be filtered to show/hide some details.

To open the `Display options` click at `Settings`:

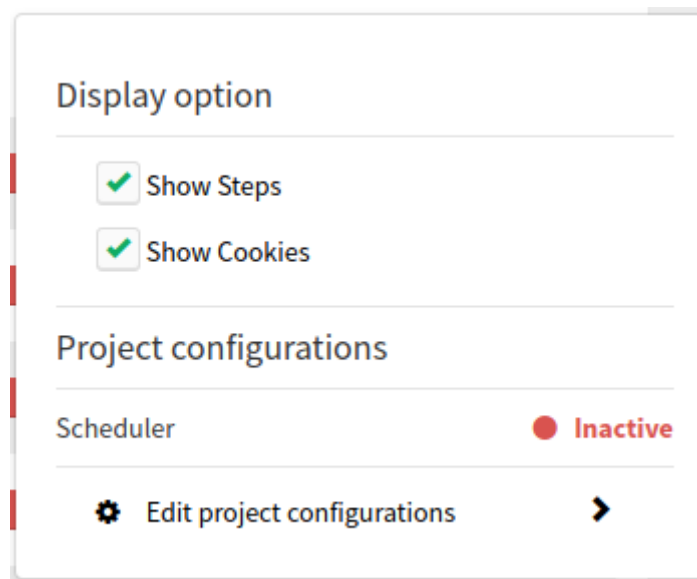

Display option

- Show Steps
- Show Cookies

Project configurations

Scheduler ● Inactive

Edit project configurations

The display options allow us to:

- Show/Hide the steps
- Show/Hide the cookies table
- Consult the scheduler (The scheduled is configured at the project configurations at the reports and scheduling tab)

Cookie Crawler project


The Cookie Crawler project generates a report of the all browser cookies found during the crawl of the websites.

For each execution it can be seen:

- URL crawler - The URL(s) that was crawled
- Filters - Domains filtered
- Cookies Accepted - Tells whether the cookie warning was accepted or not
- Cookies to validate - Cookies validated during the crawl (click at the eye to see the validations in a table)
- Max Depth - Depth of the crawl
- Validation failed - The cookies not found at the report
- Total Cookies (Distinct by name) - Number of different cookies found at the report distinct by name
- Total cookies - Number of different cookies found at the report
- Total URLs - Number of different URLs crawled

There are several tabs to present execution information: Summary, Cookie table and URLs tree.


Summary:

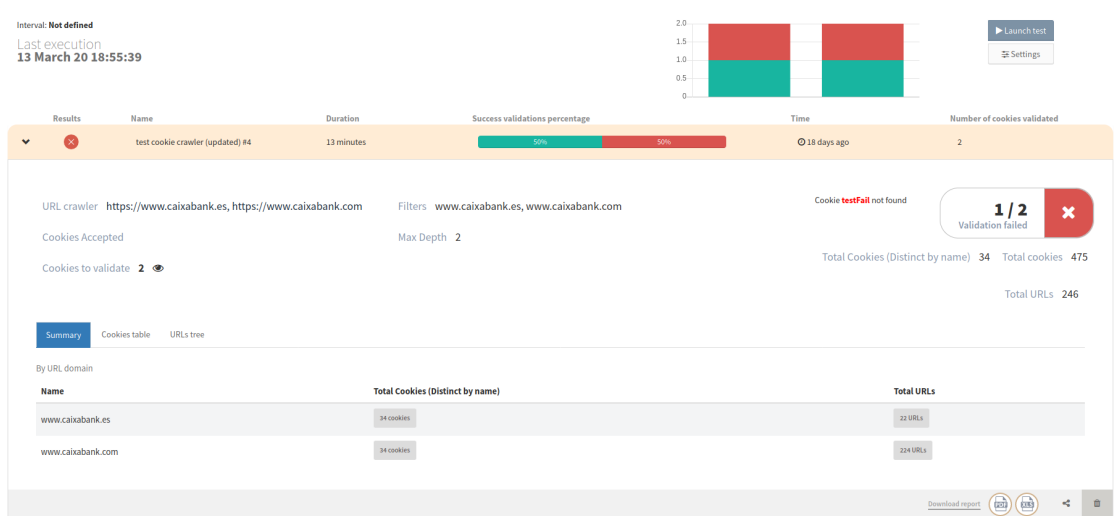

This table presents the information By URL domain.

For the screenshot above we can see that for the domain `www.caixabank.es`, we found 34 cookies (Distinct by name) in a total of 22 URLs.

Cookie table:

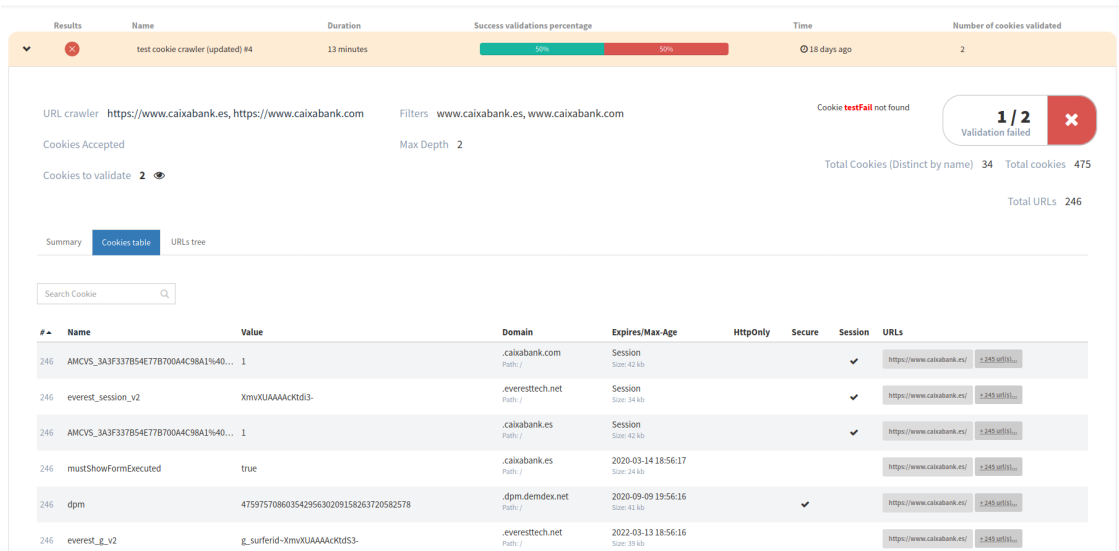


The screenshot displays the 'Cookies table' view. At the top, it shows the crawler's progress: 'test cookie crawler (updated) #4' with a duration of 13 minutes, 50% success rate, and 2 cookies validated. Below this, the crawler's URL and filters are listed. A summary bar indicates 'Total Cookies (Distinct by name) 34' and 'Total cookies 475'. The main table lists individual cookies with columns for #, Name, Value, Domain, Expires/Max-Age, HttpOnly, Secure, Session, and URLs.

#	Name	Value	Domain	Expires/Max-Age	HttpOnly	Secure	Session	URLs
246	AMCVS_3A3F337B54E77B700A4C98A1%40...	1	.caixabank.com	Session Size: 42 kb			✓	https://www.caixabank.es/ +245 urls...
246	everest_session_v2	XmvXUAAAACKd3-	everesttech.net	Session Size: 24 kb			✓	https://www.caixabank.es/ +245 urls...
246	AMCVS_3A3F337B54E77B700A4C98A1%40...	1	.caixabank.es	Session Size: 42 kb			✓	https://www.caixabank.es/ +245 urls...
246	mustShowFormExecuted	true	.caixabank.es	2020-03-14 18:56:17 Size: 24 kb				https://www.caixabank.es/ +245 urls...
246	dpm	47597570860354295630209158263720582578	dpm.demdex.net	2020-09-09 19:56:16 Size: 11 kb		✓		https://www.caixabank.es/ +245 urls...
246	everest_g_v2	g_surferid-XmvXUAAAACKd3-	everesttech.net	2022-03-13 18:56:16 Size: 29 kb				https://www.caixabank.es/ +245 urls...

This table presents the all the cookie's information retrieved at the crawler for the URL(s) crawled, and the URL(s) where the cookie was found.

URLs tree:

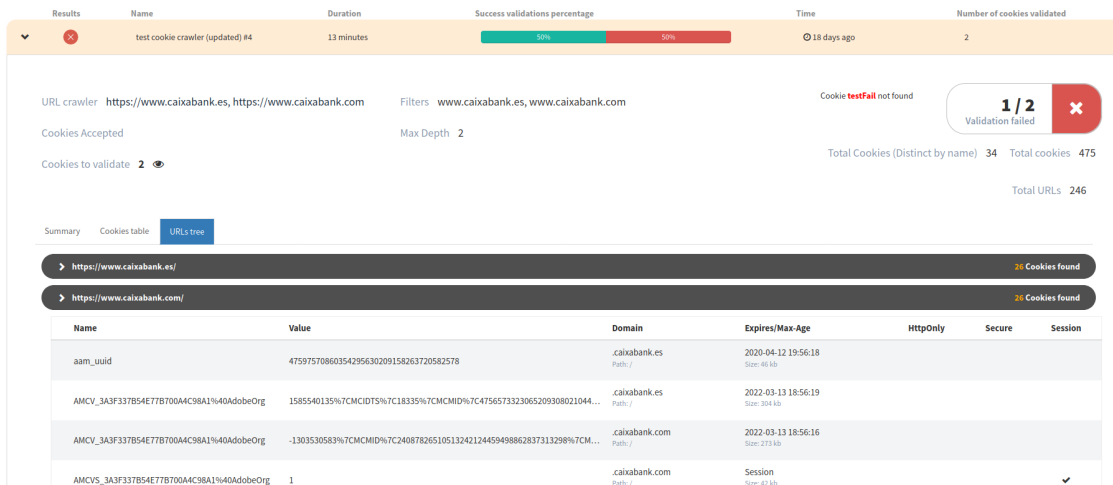

The screenshot shows the 'URLs tree' view. It displays a hierarchical list of URLs crawled. Two URLs are expanded, showing the cookies found for each. The cookies table below lists details for these cookies.

Name	Value	Domain	Expires/Max-Age	HttpOnly	Secure	Session
aam_uid	47597570860354295630209158263720582578	caixabank.es	2020-04-12 19:56:18 Size: 46 kb			
AMCV_3A3F337B54E77B700A4C98A1%40AdobeOrg	1585540135%7CMCIDT5%7C18335%7CMCMID%7C4756573323065209308021044...	.caixabank.es	2022-03-13 18:56:19 Size: 394 kb			
AMCV_3A3F337B54E77B700A4C98A1%40AdobeOrg	-1303530583%7CMCMID%7C24087826510513242124459498862837313298%7CM...	caixabank.com	2022-03-13 18:56:16 Size: 273 kb			
AMCVS_3A3F337B54E77B700A4C98A1%40AdobeOrg	1	.caixabank.com	Session Size: 42 kb			✓

This view shows the URLs tree generated by the crawl, with the cookies found for each URL.

Display options

The information at the execution page can be filtered to show/hide some details.

To open the `Display options` click at `Settings`:

Display option

Show new cookies only (Tree view)

Show all cookie information (Table view)


Project configurations

Max Depth

Accept Cookies

Number of Validation(s)

Scheduler ● Inactive

 Edit project configurations ➤

The display options allow us to:

- Show new cookies only (Tree view) - Only shows the new cookies at the URLs tree in the child levels. The default is show every cookie (even the repeated ones).
- Show all cookie information (Table view) - Shows all the cookie information (this is the fields: domain, Expires/Max-Age, HttpOnly, Secure and Session). The default is to show the Name, Value and URLs aggregated.
- Max Depth - The Max depth configured at project configurations
- Accept Cookies - Shows if accept cookies are checked or not at project configurations
- Number of Validation(s) - Shows the number of validations configured at project configurations
- Consult the scheduler (The scheduled is configured at the project configurations at the reports and scheduling tab)

On the feature (for web application testing) view check the scenarios of this particular feature:



When expands a scenario see all the steps and results. Is easily switch to the results of another browser. More functionalities:

- **Screenshots** - Minium Manager provides screenshots of the application at the moment of the failure. So it is possible to see the state of the application in the moment of failure.
- **Error messages**
- **Links to the feature or step file for each step.**
- **Evolution chart for the projects**
- **Video with the cue points when the scenarios start**

Monitoring project

Feature page of a Monitoring project scenario:




At the feature page, we can see more details about the page load performance:

- The url loaded
- The loading time with the times of the Backend Performance, Frontend Performance and DOM Content Loading
- The number of requests
- The Javascript Errors (if any)

- The URL status code

Cookie project

Feature page of a Cookie Report project scenario:

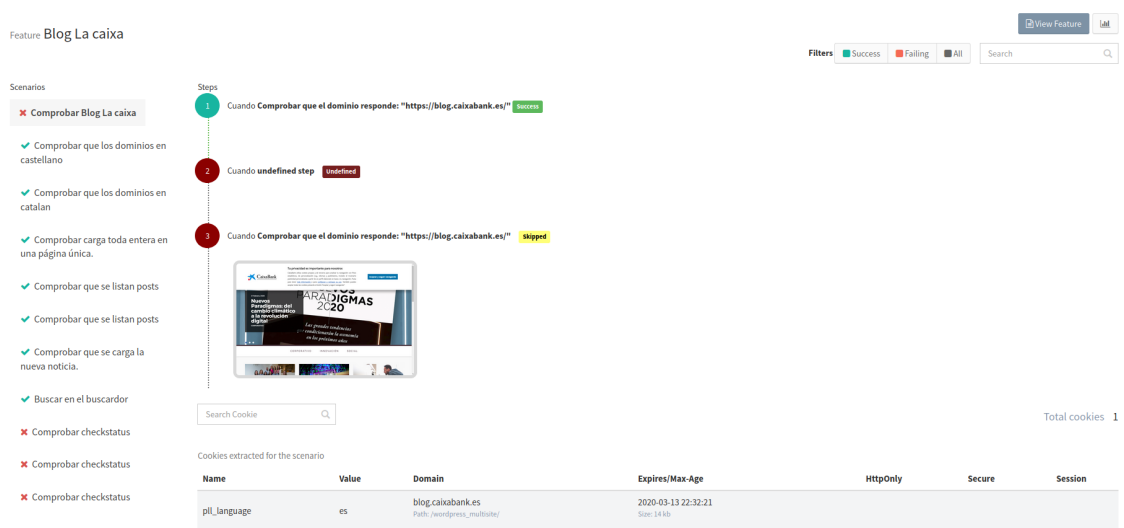

Name	Value	Domain	Expires/Max-Age	HttpOnly	Secure	Session
pll_language	es	blog.caixabank.es Path: /wordpress_multisite/	2020-03-13 22:32:21 Size: 14 kb			

We can see at the end of each scenario a table (with a filter) of all browser cookies.




Note:

The Feature overview page is not available to the Cookie Crawler project.

4.1. Feature overview

Overview of all the features, by clicking on the button View Feature.

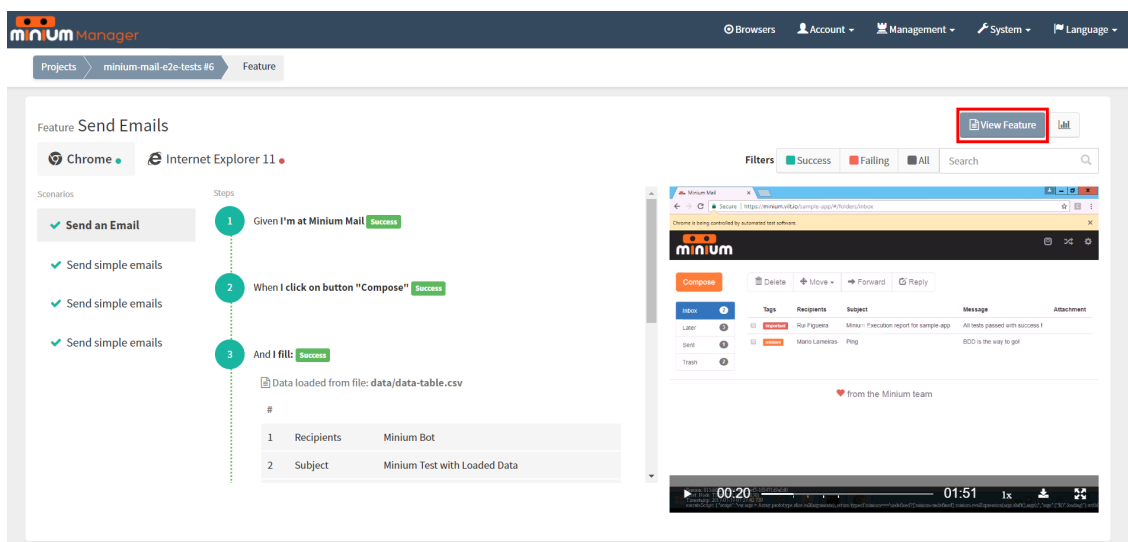

#	Recipients	Minium Bot
1	Recipients	Minium Bot
2	Subject	Minium Test with Loaded Data

View the result of each step in each browser that the feature ran.

Delete Emails

Background:
 Given I'm at Minium Mail

Scenario: Delete an email
 Given an email with Subject "Minium Can!" exists
 When I delete an email with Subject "Minium Can!"
 And I navigate to section "Trash"
 Then I should see an email with:

Subject	Minium Can!
Recipients	Minium Bot

Scenario: Delete an email from trash
 Given I'm at section "Trash"
 And an email with Subject "Phasellus vitae interdum nulla." exists
 When I delete an email with Subject "Phasellus vitae interdum nulla."
 Then I shouldn't see an email with:

Subject	Minium Can!
---------	-------------

Close

4.2. Reports


Receive the reports of each test execution, in PDF and/or Excel formats, via email. Alternatively, download them directly in Minium Manager. To choose the formats to receive via email, go to the configurations of the project and expand the advanced configurations:


Emails

Recipients Email addresses to receive reports of the executions

Send only when there are test failures

Report formats

 PDF

 XLSX

To download a report, expand the results of a test execution and click in `Download report`:

Executions ▶ Launch test ⚙️ 📄

Results	Name	Duration	%	Browsers	Time	Scenarios
🚫	minium-mail-e2e-tests #7	3 minutes	93%	📄	🕒 26 minutes ago	15

Execution #7 Filters by browser ⚙️ 📄

Status	Feature	Result	Passing / Failing	Duration
📄	Delete Emails	🚫	✓ 2 / ✗ 0	a few seconds
📄	Login	🚫	✓ 1 / ✗ 1	a few seconds
📄	Move Emails	🚫	✓ 1 / ✗ 0	a few seconds
📄	Send Emails (Loading External Data CSV)	🚫	✓ 4 / ✗ 0	a few seconds
📄	Send Emails	🚫	✓ 6 / ✗ 0	a minute

Download report
📄
📄

4.3. Daily Reports

The daily report is a custom report with your favorite projects that will be sent to your email with the status of the last completed execution in the last 24 hours.

Before being able to configure a daily report, first you need to set the email configured at [Account > Settings](#).



Note:

If Minium Manager is using LDAP, please contact your administrator to set your email at LDAP.

To create a daily report configuration, open the [Account](#) menu and click on [Daily Reports](#).

Choose the projects to be included in your custom daily report:

Projects

Choose the projects to be included in your custom daily report.

Search for projects - Filter By Group - - Filter By Label -

<input type="checkbox"/>	Name <input type="button" value="v"/>	Groups	Labels
<input type="checkbox"/>	authenticated_project		
<input type="checkbox"/>	google-test-git	<input type="button" value="qa.team"/>	<input type="button" value="staging"/>
<input type="checkbox"/>	google-test-svn		
<input type="checkbox"/>	minium-mail-e2e-tests	<input type="button" value="minium.team"/> <input type="button" value="eng.team"/> <input type="button" value="qa.team"/>	<input type="button" value="prod"/>
<input type="checkbox"/>	test		
<input type="checkbox"/>	test-jvm-project		
<input type="checkbox"/>	unauthenticated_project		

Show Projects

Project(s) selected: Total selected: 0

None

After, schedule the time the email will be sent, with a summary of the past 24h.

Scheduling


The report will be sent at the time you configure, with a summary of the past 24h.

Every: at :


Finally, click on the button "Create/Update Daily Report Configuration" to create/update the

daily reports:

Daily report of the past 24h (with errors) Inbox x

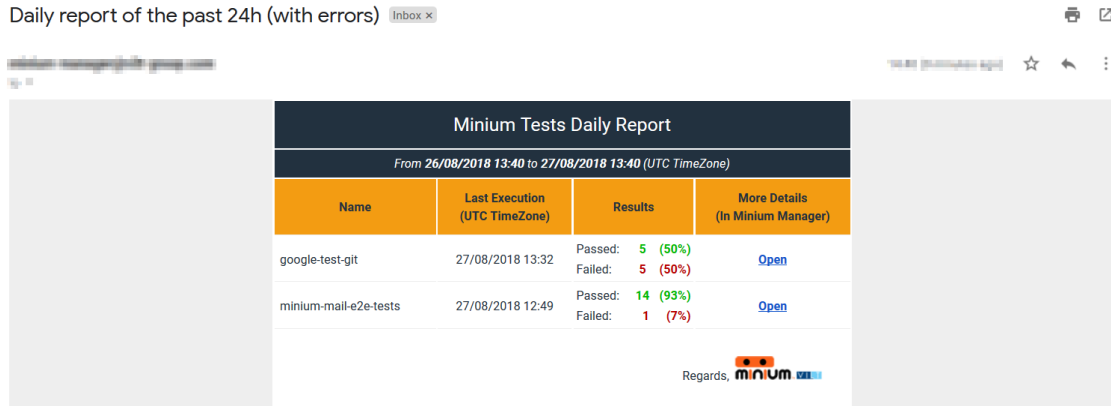

Name	Last Execution (UTC Timezone)	Results	More Details (In Minium Manager)
google-test-git	27/08/2018 13:32	Passed: 5 (50%) Failed: 5 (50%)	Open
minium-mail-e2e-tests	27/08/2018 12:49	Passed: 14 (93%) Failed: 1 (7%)	Open

Regards, 

To delete the configuration, click on the button "Delete Daily Report Configuration".

The daily report was configured to be sent at **06:00** with the status of the last completed execution in the last 24 hours for the following projects:

- authenticated_project
- google-test-git
- google-test-svn
- minium-mail-e2e-tests
- test
- test-jvm-project
- unauthenticated_project


[Change Daily Report Configuration](#)

[Delete Daily Report Configuration](#)

4.4. Data Extraction Reports

The Data extraction report is a custom report (in Excel format) with your favorite projects that will be sent to the specified email addresses with the status of the last completed execution, and the project details.

To create and/or consult the data extraction reports configurations, open the **Management** menu and click on **Data Extraction Report**.

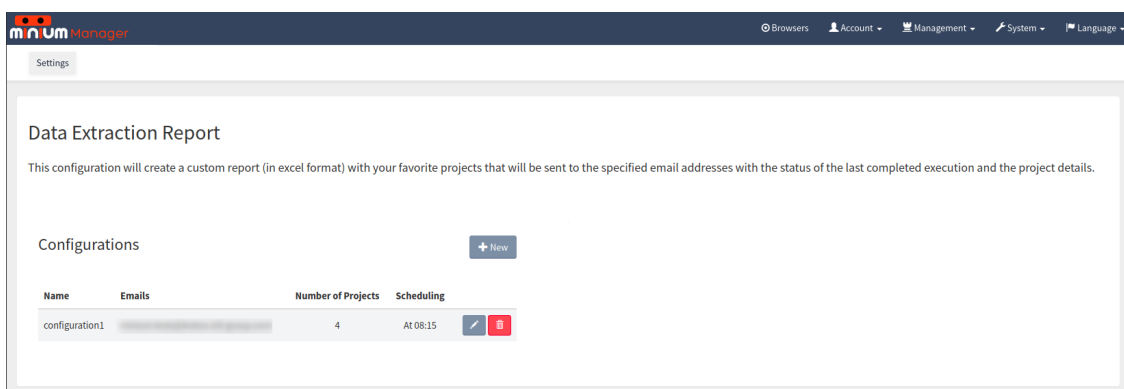

Data Extraction Report

This configuration will create a custom report (in excel format) with your favorite projects that will be sent to the specified email addresses with the status of the last completed execution and the project details.

Configurations + New

Name	Emails	Number of Projects	Scheduling
configuration1	View	4	At 08:15 Edit Delete


At the data extraction report page, you can see the current configurations created at the list

Configurations.

You can edit (by clicking in the **pencil** button) or delete (by clicking on the **trash** button) the configurations listed at the list `Configurations`.

Also, you can create a new configuration by clicking on the button `+ New`.

When you click the button `+ New`, a form will appear (similar to the edit form) on the right side of the page:

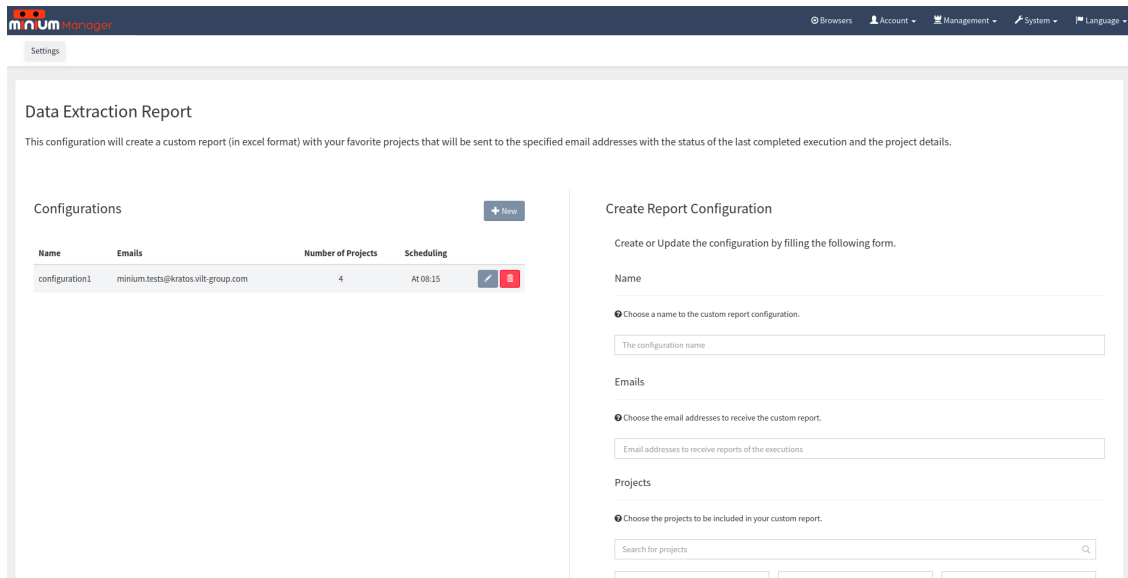

The screenshot shows the 'Data Extraction Report' configuration page. On the left, there is a table titled 'Configurations' with columns: Name, Emails, Number of Projects, and Scheduling. A '+ New' button is located to the right of the table. The table contains one row: 'configuration1', 'minium.tests@kratos.vilt-group.com', '4', and 'At 08:15'. On the right, there is a 'Create Report Configuration' form. It includes a 'Name' field, an 'Emails' field, and a 'Projects' field. Each field has a dropdown menu and a search input. The form is titled 'Create or Update the configuration by filling the following form.'

To create a new configuration, fill the form by add a new configuration name (unique value), the emails that will receive the configuration, choose the projects to be included in the report and finally, schedule the time the email will be sent, with the report.

Note:



To choose the projects, you have filters available to help. You can filter the project by name, type, group and label.

To save the configuration, click on the button `+ Save`.

The email received will list a summary of the projects selected (separated by type), the statistics of the monitoring projects (How many executions since last report was sent, how many executions passed and how many executions failed), and will have the report (in Excel format) attached.

Note:




The subject of the email received is "Data Extraction Report".

4.4.1. Crawler Aggregator

The Data extraction report has an option to generate one report with only Cookie Crawler Projects.

To configure Data extraction report with the aggregation of the Cookie Crawler Projects, choose the type `Crawler Aggregate`:

that will be sent to the specified email addresses with the status of the last completed execution and the project details.

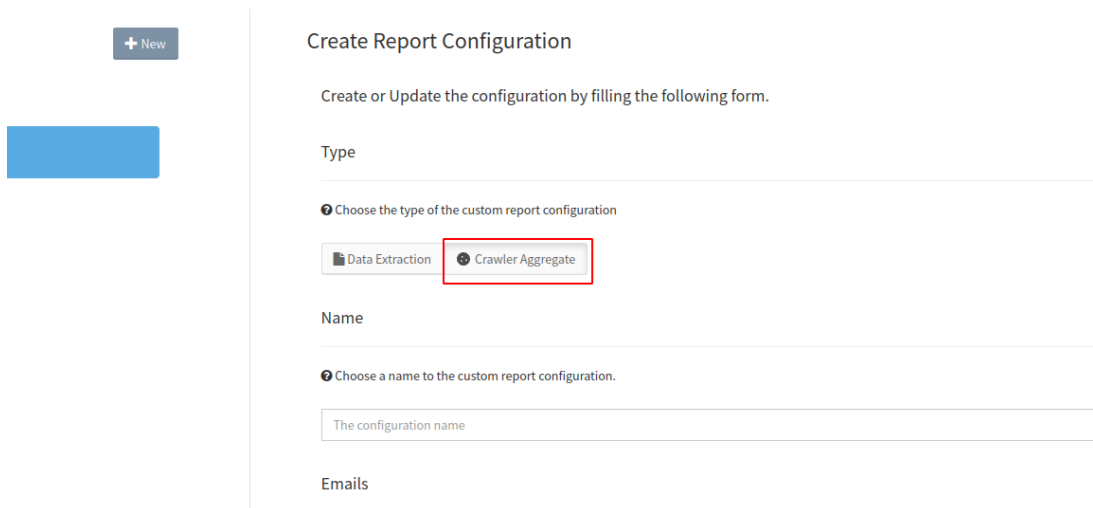

Create Report Configuration

Create or Update the configuration by filling the following form.

Type

Choose the type of the custom report configuration

Data Extraction Crawler Aggregate

Name

Choose a name to the custom report configuration.

Emails

After configure the report as a Data extraction report.

The email received will list a summary of the projects Cookie Crawler selected, and the statistics of the projects (How many executions since last report was sent, how many executions passed and how many executions failed).


4.5. Regressions

Minium Manager identifies the scenarios and features that were passing and in the last execution failed:


Executions (Total: 4)

Filter by result: Success Failing All


Results	Name	Duration	%	Browsers/Devices	Time															
✖	⚠ test-regression #6	a minute	<div style="width: 50%;"><div style="width: 50%;"></div></div> 50%	🌐	🕒 an hour ago															
<p>Execution #6</p> <table border="1"> <thead> <tr> <th>Status</th> <th>Feature</th> <th>Result</th> <th>Passing / Failing</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>🟢</td> <td>Simple test feature</td> <td>🌐 chrome</td> <td>✓ 0 / ✖ 1</td> <td>a few seconds</td> </tr> <tr> <td>🔴</td> <td>⚠ Simple test of the feature 1</td> <td>🌐 chrome</td> <td>✓ 5 / ✖ 3</td> <td>a few seconds</td> </tr> </tbody> </table>						Status	Feature	Result	Passing / Failing	Duration	🟢	Simple test feature	🌐 chrome	✓ 0 / ✖ 1	a few seconds	🔴	⚠ Simple test of the feature 1	🌐 chrome	✓ 5 / ✖ 3	a few seconds
Status	Feature	Result	Passing / Failing	Duration																
🟢	Simple test feature	🌐 chrome	✓ 0 / ✖ 1	a few seconds																
🔴	⚠ Simple test of the feature 1	🌐 chrome	✓ 5 / ✖ 3	a few seconds																
✖	test-regression #5	a few seconds	<div style="width: 67%;"><div style="width: 67%;"></div></div> 67%	🌐	🕒 an hour ago															
✖	⚠ test-regression #4	a minute	<div style="width: 50%;"><div style="width: 50%;"></div></div> 50%	🌐	🕒 an hour ago															
✖	test-regression #3	a few seconds	<div style="width: 67%;"><div style="width: 67%;"></div></div> 67%	🌐	🕒 an hour ago															

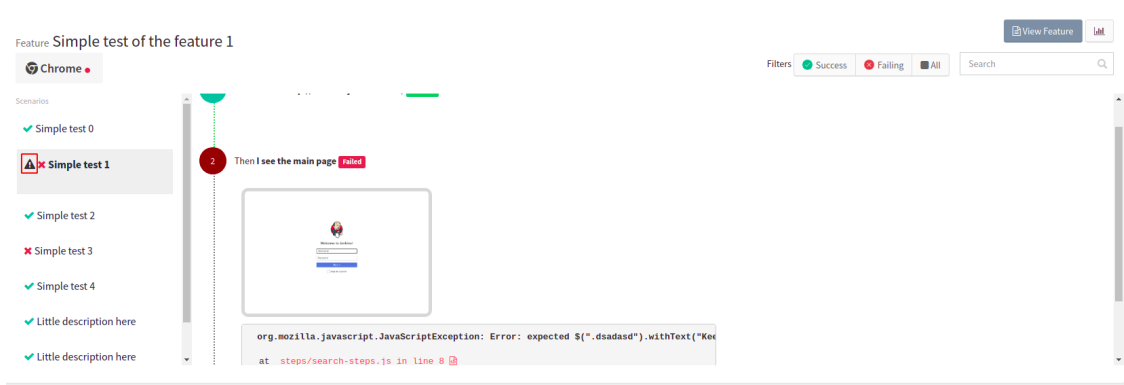

For monitoring projects, the executions page is:

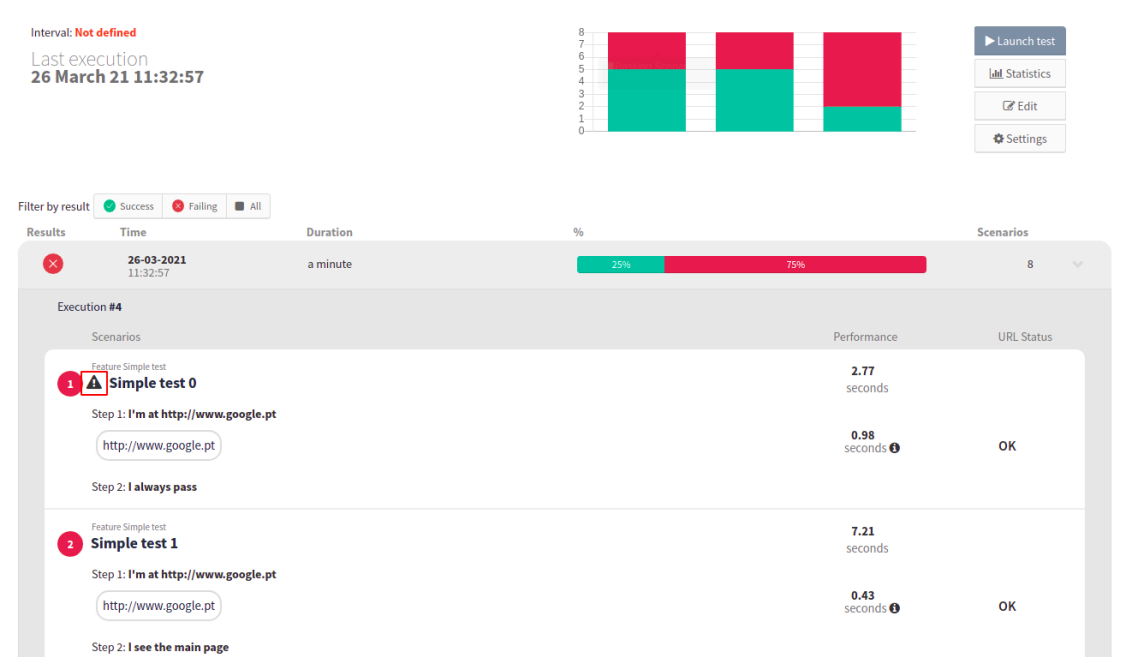

At the mouse over in the warning icon, the regressions's widget is presented to show more information about the past executions, the last execution passed, and the last execution failed for the regression:

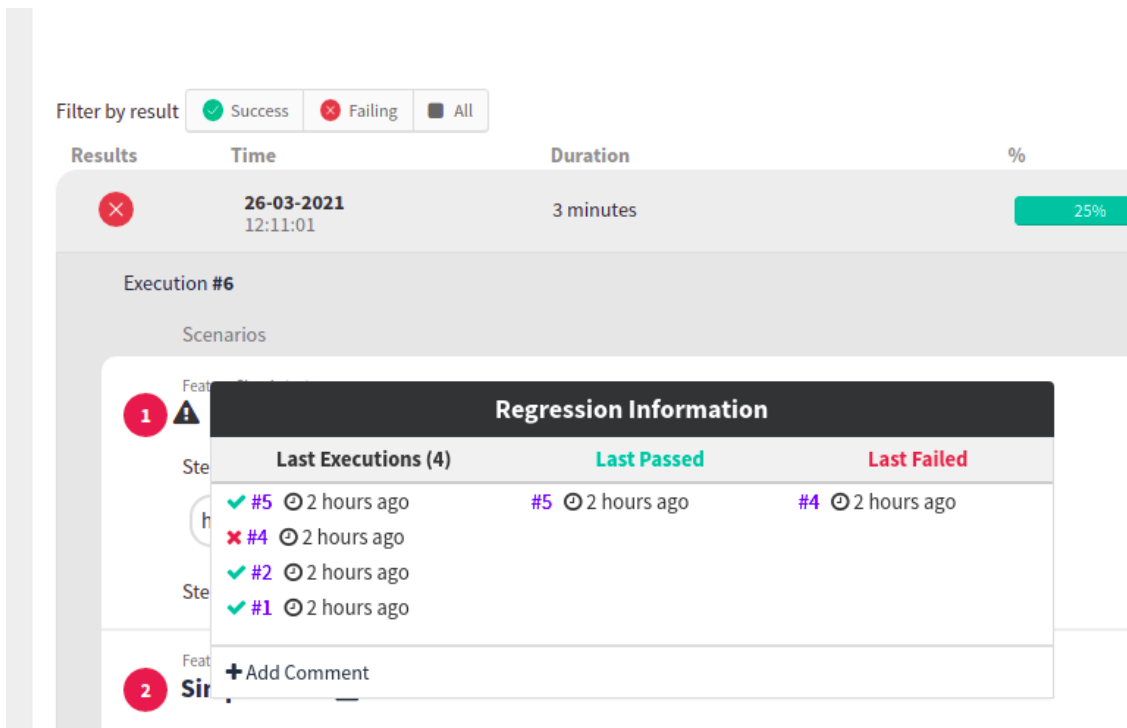

Filter by result Success Failing All

Results	Time	Duration	%
✘	26-03-2021 12:11:01	3 minutes	25%

Execution #6

Scenarios

Regression Information

Last Executions (4)	Last Passed	Last Failed
✔ #5 ⌚ 2 hours ago	✔ #5 ⌚ 2 hours ago	✘ #4 ⌚ 2 hours ago
✘ #4 ⌚ 2 hours ago		
✔ #2 ⌚ 2 hours ago		
✔ #1 ⌚ 2 hours ago		

✘ + Add Comment

The regression widget also allow adding comments at the regression detected. To add a comment, click ad + Add Comment and fill textarea and click Save:

Regression Comment

After, we can check the comments added in the previous executions by clicking on the comment's icon:

Regression Information		
Last Executions (4)	Last Passed	Last Failed
✓ #5 ⌚ 2 hours ago	#5 ⌚ 2 hours ago	#4 ⌚ 3 hours ago
✗ #4 ⌚ 3 hours ago 🗨️		
#4: First fail		
✓ #2 ⌚ 3 hours ago		
✓ #1 ⌚ 3 hours ago		
+ Add Comment		

We can also edit the comment by clicking on [Edit Comment](#):

Regression Information	
Last Executions (2)	Last Passed
✓ #2 ⌚ 3 hours ago	#2 ⌚ 3 hours ago
✓ #1 ⌚ 3 hours ago	
✎ Edit Comment	
First fail	

simple test 1

Edit the text and click [Save](#).

To delete the comment click [Delete](#).

5. Roles


Roles allow granting different privileges to the users and the groups. The privileges associated with each role are described in the table below:

	User	Manager	Administrator
View projects	✓	✓	✓
Launch test executions	✓	✓	✓
Configure projects	✓	✓	✓
Create projects		✓	✓
Manage project labels		✓	✓
Manage users			✓
Manage roles			✓

5.1. Assign roles

To change the role of a user or group, navigate to **Management > Roles** at the navigation bar and:

1. Introduce the name of the user or group in the search bar.
2. Select a role.
3. Click on **Save** button.

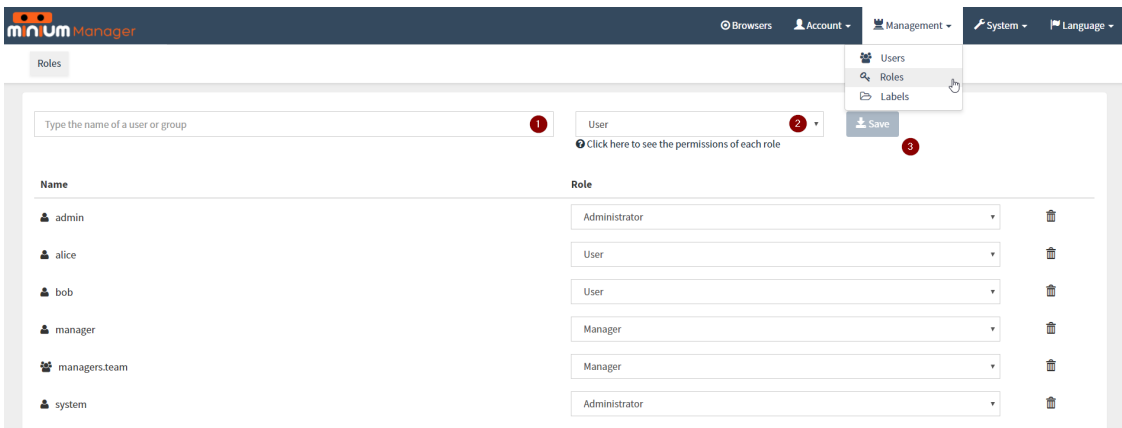


The screenshot displays the 'Roles' management page in the VILT Minium Manager. At the top, there is a navigation bar with 'Management' selected. Below it, a search bar is labeled 'Type the name of a user or group' (1). A dropdown menu is open, showing 'Users', 'Roles', and 'Labels' (2). A 'Save' button is visible (3). The main content area shows a list of users and their assigned roles:


Name	Role
admin	Administrator
alice	User
bob	User
manager	Manager
managers.team	Manager
system	Administrator

6. License information

At the top right of the project list page exists the license information label, that gives the number of executed scenarios in this month, and the total of scenarios per month that to the current license

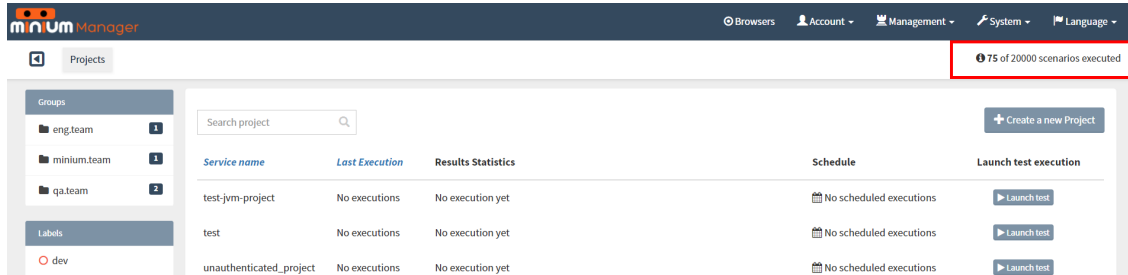

By clicking on the license information label, it will open a modal with more detailed information about one license.

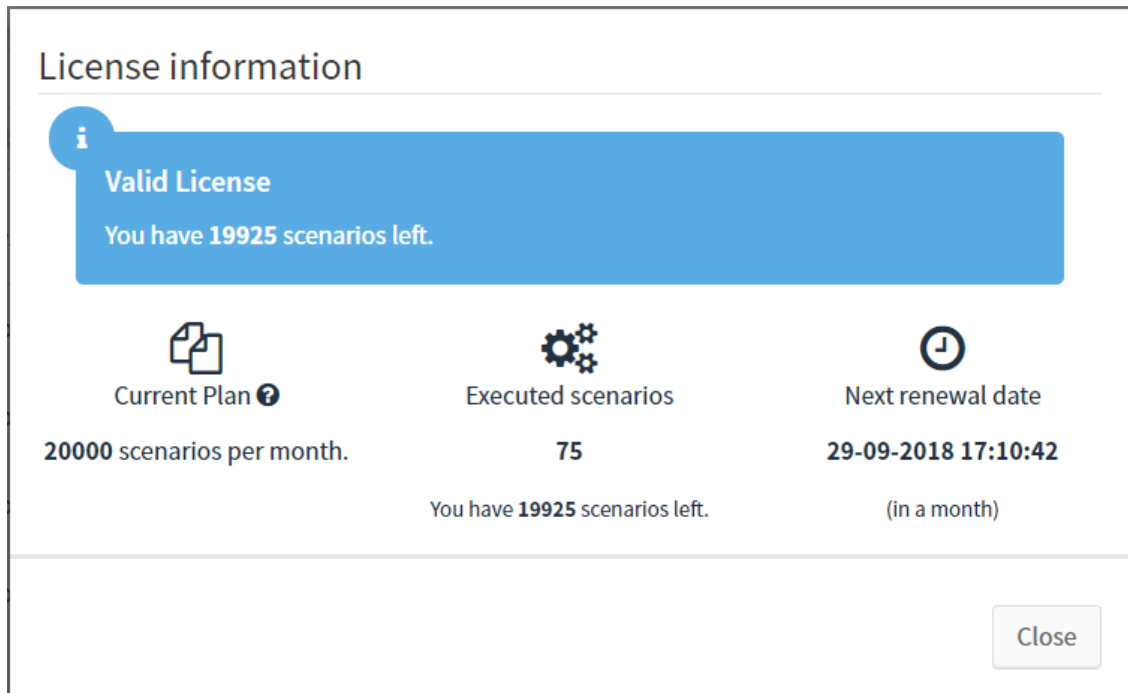

7. Minium Recorder User Guide

Minium Recorder has been developed to ease and accelerate the creation of Minium tests. With the **Minium Recorder**, is no longer needed to write all the code for the step definitions by hand. Simply tell to the **Minium Recorder** to start recording the interactions with the browser, perform the actions that correspond to the defined step and an automation script is immediately available in **Minium Developer**.

But what really makes Minium Recorder different in relation to other automation script recorders is that, for each element that interacts, Minium Recorder will not generate just one CSS selector. Instead, is possible choose among a list of alternative expressions for each element that take advantage of the great Minium filtering methods that are used like for example `withLabel`, `below`, `rightOf`, etc, to build more readable and resilient expressions.

7.1. Configure Minium Developer

Minium Recorder is already configured at **Minium Developer Prime**, but you can configure an existing **Minium Recorder**.

To configure **Minium Developer** with the **Minium Recorder** extension, first you need to download the **Minium Recorder** extension.

Navigate to the folder where **Minium Developer** is installed, create a folder named "**extensions**", copy the **Minium Recorder** extension file to the new folder and rename the file to "minium-recorder.crx".

After, edit the `config/application-{windows,linux,macos}.yaml` file in order to add the following configuration (at the chrome webdriver):

```
minium:
  developer:
    webdrivers:
      - name: chrome
      ...
      chromeOptions:
        extensions:
          - ${app.home:./}/extensions/minium-recorder.crx
        preferences:
          devtools:
            preferences:
              panel-tabOrder: "{\"chrome-
extension://ggefecclafoeojognglebilidgmgdLogMiniumRecorder\":10,\"elements
\":20,\"console\":30,\"sources\":40,\"network\":50,\"timeline\":60,\"heap_
profiler\":70,\"resources\":80,\"security\":90,\"audits\":100}"
```

7.2. Launch Minium Recorder


Launch **Minium Recorder** through **Minium Developer**.

Open **Minium Developer** and add the following command to the editor:


```
browser.get ("http://www.google.com/ncr");
```

This will load the google search engine website, when the instance of Chrome is launched.

To launch Minium Recorder, use the (Ctrl + Enter) shortcut or select Run > Launch Browser (1) and (2) at the top-right menu:

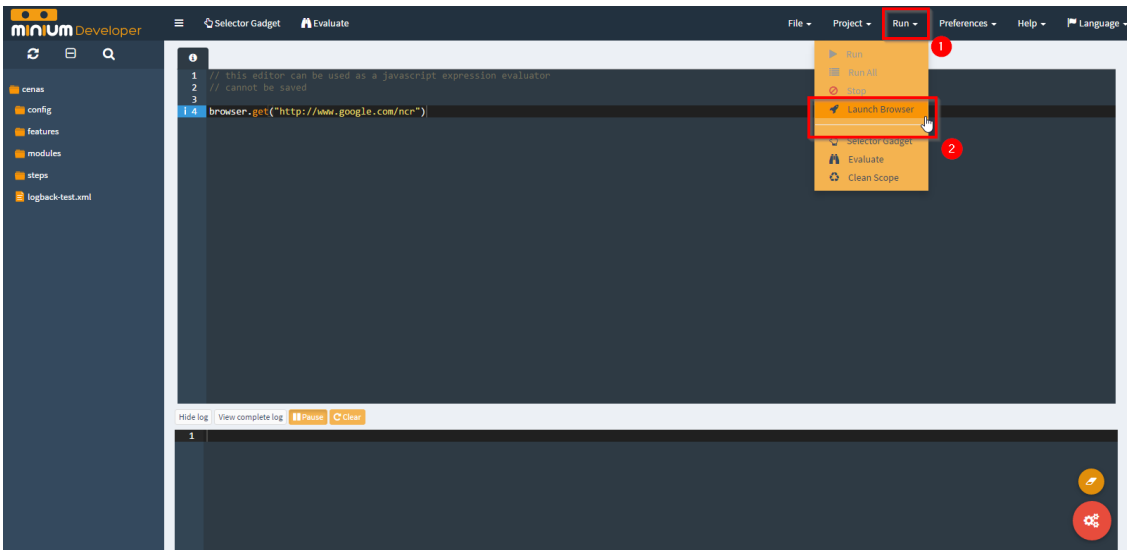


Select the Chrome browser (1), check if Minium Recorder is available (2) and click Created a new WebDriver (3):

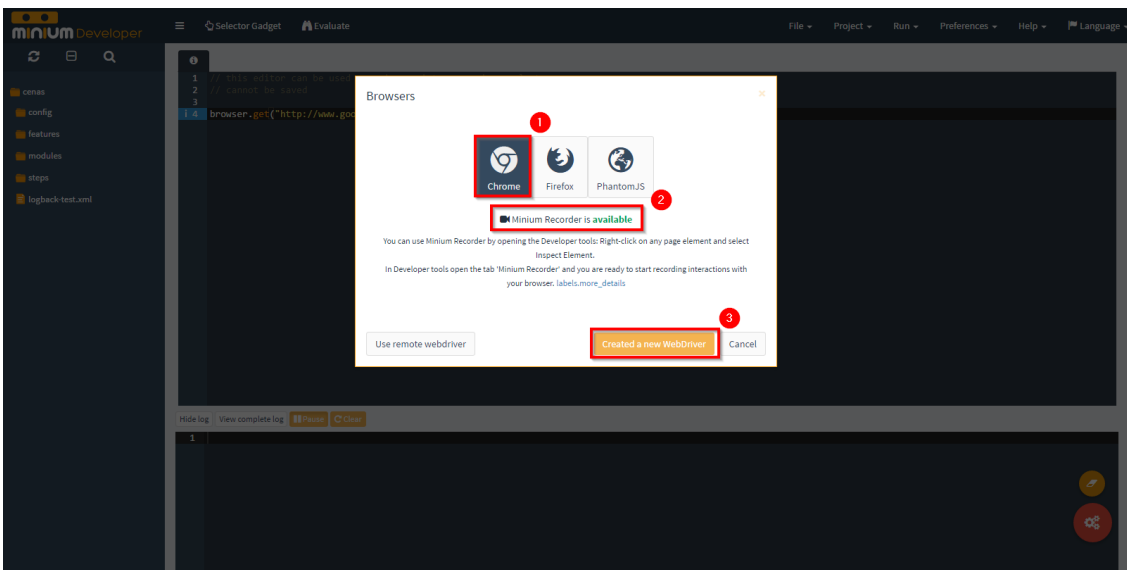


A new instance of Chrome will be launched with the Minium Recorder extension installed. In the instance of Chrome, open the Developer tools by using the (F12) shortcut (use another shortcut) or select More Tools > Developer tools.

After the Developer tools of the instance Chrome is opened, select the Minium Recorder tab (1):

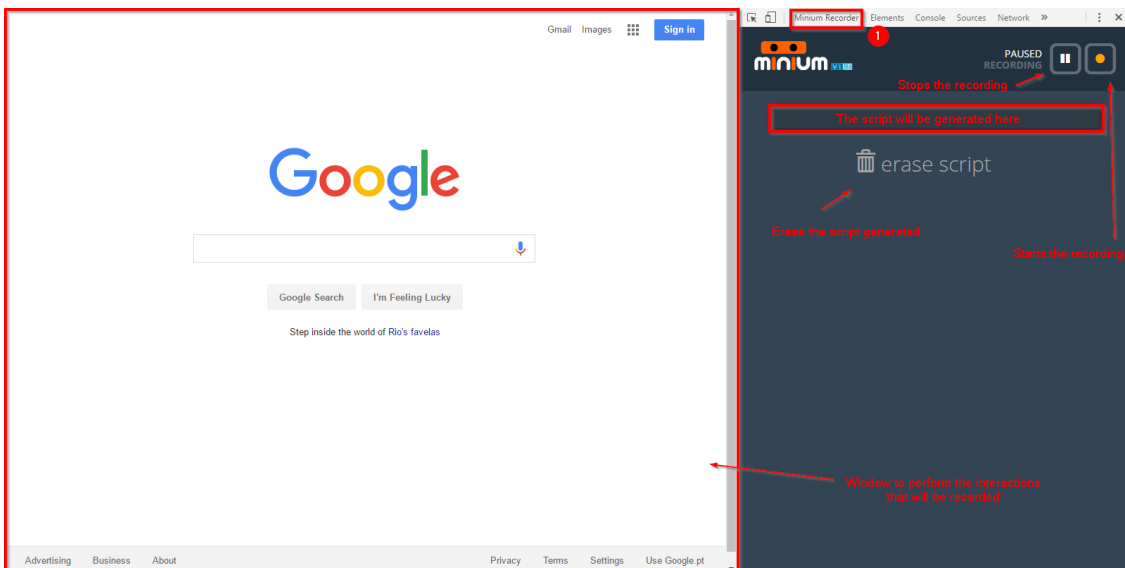

7.3. Start recording


To start recording, click on the following button:

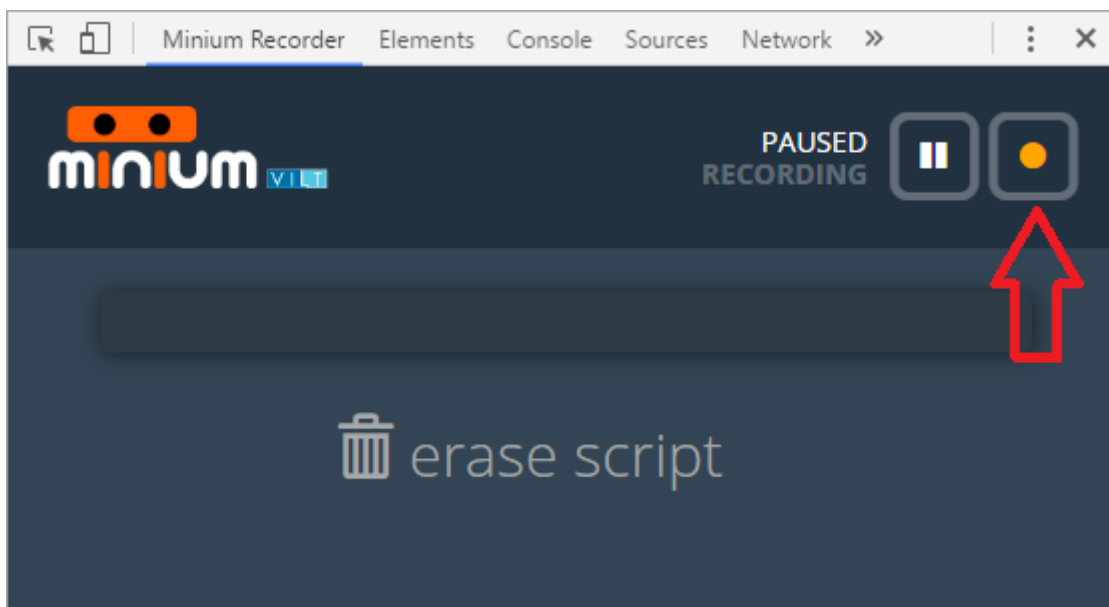

From now on, every interaction performed with the browser will be recorded.

7.4. Record interactions

For every action performed on the browser, like clicking on an element or filling a text input field, Minium Recorder will automatically generate the corresponding code. If typed an URL in the address bar, Minium Recorder will also generate the code to load that URL.

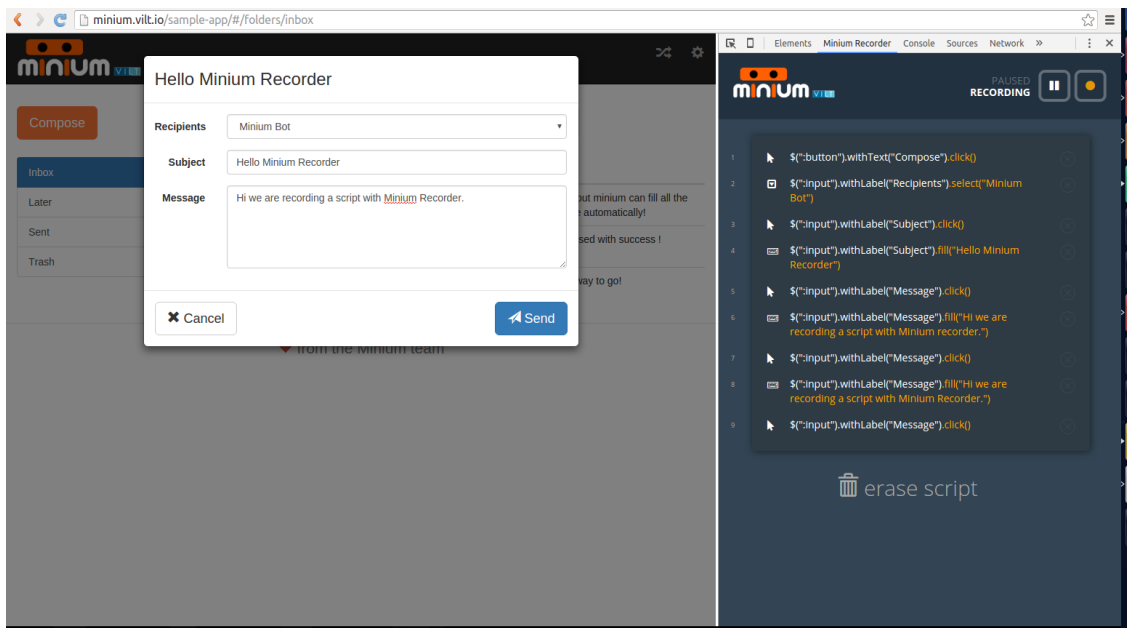

To try other expressions, click on the expression and a list of alternative expressions will be displayed:



To select an expression, just click on it.

7.5. Stop recording

Click on the pause button to stop a recording.



7.6. Import the recorded script in Minium Developer

To import a script in Minium Developer, right-click on the editor area, where is intended to put the script, and choose the option `Import recorded script`:

